Kitchen Experience and Design Guide

Volume 9

BOSCH
Invented for life

THE HOME DEPOT

How doers get more done.

Contents

Savor every detail of Bosch.

No place means home more than the kitchen. It's where we gather with family and friends, exhale after a long day, and savor so many of life's simple moments.

Through our products, we strive to enhance the daily quality of everyday lives. Believing that a cooktop should be a recipe for ease. That the joy of simplicity is anything but minimal. And that it's important to sometimes stop and smell the rosemary carrots. These are the true hallmarks of Bosch quality. These are the details to savor.

America's Most Trusted Kitchen Brand 2019-2020*

We're honored to be trusted by you and promise to always deliver lasting products that bring effortless ease and timeless style to your kitchen.

*Bosch received the highest numerical score in the proprietary Lifestory Research 2019 and 2020 America's Most Trusted® Kitchen Brand study. Your experiences may vary. Visit lifestoryresearch.com

485 quality checks

Every dishwasher must pass 485 quality checks—including running every single one with water—before leaving the factory. So you can rest assured that your dishwasher is built to withstand whatever life throws your way.

Quality is in the details.

From the feel of an oven handle, to the quiet of a dishwasher, to the ease of a cooktop, we believe the products we use and interact with every day can enhance the daily quality of your life. It's these small details, obsessed upon by our engineers and repeatedly tested in our factory, that manifest as the tangible difference of Bosch quality.

Best of Year 2020

Reviewed.com gave Bosch a perfect score in their 2020 Best of Year awards, stating, "The Bosch 800 Series with CrystalDry™ is the best dishwasher we've ever tested."

Bosch design philosophy.

These are the principles that guide every Bosch product.

For over 100 years, Bosch appliances have embraced a tradition of timeless design that's both purposeful and beautiful. We see the beauty in simple, streamlined aesthetics that result from how our products are actually used.

1 Form + Function

Bosch design is equally purposeful and beautiful, creating a lasting and rewarding user experience.

2 Symmetry

Balanced, symmetrical lines offer a timeless look that's pleasing to the eye and offers a distinctive family appearance.

3 Proportions

The harmonious arrangement of varying elements results in a sophisticated, well-balanced design.

4 Materials

The use of premium materials makes our appliances visually arresting and offers a tactile sense of quality that you can feel.

5 Illumination

Subtle, purposeful illumination enhances usability while creating an emotional connection.

6 Color Palette

From classic black and white, to metallic tones and red/white accent lighting, our affinity for neutral colors helps seamlessly blend our appliances into a range of kitchens.

7 Alignment

Flush, well defined surface contours, unified design elements, and tight panel gaps indicate an elevated level of engineering precision.

8 Subtlety

Subtle, thoughtful details delight the user in unexpected ways and improve the overall experience of our appliances.

9 Integration

From kitchen designs ranging from modern to transitional, Bosch appliances naturally integrate with any style.

10 Longevity

With enduring, timeless design and lasting quality, every Bosch appliance beautifully withstands the test of time.

The Black Stainless Steel Collection.

Make a statement without leaving a mark.

Behold a daring new way to design your kitchen. Built with the quality you expect from Bosch in a contemporary style, the collection is strong, sturdy, and sleek. Our black stainless steel is made from a special material, not simply a black foil coating. So our kitchen appliances help guard against scratches and fingerprints to maintain their bold look.

Introducing the Industrial Style Collection.

Bold design meets high performance.

With a commercial-inspired design, high powered burners and Bosch quality, the new industrial-style ranges and rangetops are designed to perform. From sleek to traditional. Farmhouse to your house. In whichever look you like to cook, experience the bold versatility and high performance of the Bosch industrial-style collection.

Small space living.
The big new movement.

Small space living is no longer seen as a sacrifice or compromise. More and more, people are choosing smaller-scale living out of desire, rather than need. Designing for small spaces, especially kitchens, lends itself to embracing the beauty of simplicity and efficiency. Clean, uncluttered lines. Easy aesthetics. And smaller-scaled appliances designed in correct proportions, creating balance and harmony within the surrounding space. Bosch's suite of 18" and 24" appliances are specifically designed to fit downscaled living, without sacrificing upscale tastes. Premium in every way, Bosch small scale appliances feature the quality and performance you'd expect in full-size appliances.

< **From our 24" wall ovens,** which offer up to 10 cooking modes and Genuine European Convection, to our 18" dishwashers with room to fit 10 full place settings, to our 24" glass door refrigerator, Bosch's small space appliances provide efficient solutions that can elevate any kitchen or laundry space, regardless of size.

v **When it comes to small spaces,** less is more. Timeless design is the secret to creating smaller habitats that don't sacrifice quality or style.

Installation shown requires adequate ventilation.

^ **Provide streamlined beauty and efficiency** to any project with Bosch small space appliances.

24" Pull-Out Visor Hoods
(see page 102 for details)

24" Speed Ovens
(see page 58 for details)

24" Refrigerators
(see page 156 for details)

24" Compact Laundry
(see page 162-165 for details)

24" Cooktops
(see pages 18, 24 & 32 for details)

24" Wall Ovens
(see page 42 for details)

18" Dishwashers
(see page 138 for details)

Master your day, in your own way, with Home Connect™.

Bosch is satisfying the ever-growing desire for a smart, connected home with a collection of connected appliances that bring the design, innovation, and efficiency you'd expect from Bosch. Home Connect™ is the intelligent platform that allows a variety of Bosch home appliances to be remotely monitored and controlled with a single app, for a new level of ease and convenience.

From remotely starting the dishwasher or washer at work, to keeping an eye on dinner in the oven, to brewing a frothy latte from bed, the Home Connect™ app allows you to be in effortless control from your smartphone or tablet. And with a variety of Home Connect™ partner applications such as Amazon Dash, you can even handle simple tasks like reordering dishwasher detergent. Most importantly, Home Connect™ helps you take hold of your day, in your way.

Home Connect™ partners:

amazon dash Replenishment

works with Hey Google

Chefling

amazon alexa

IFTTT

fitbit

Cooktops & Rangetops

The all new industrial-style rangetops are designed to perform with a commercial-inspired design, high powered burners and Bosch quality.

Bosch cooktops deliver perfect results with minimal effort. Whether you choose induction, gas, or electric, every Bosch cooktop combines simplicity with intuitive usability. Recipes are followed more efficiently, meals are made quickly, and cleanup happens easily.

FlameSelect® gas cooktops offer a revolutionary new level of precision. With nine predefined power levels, you no longer need to constantly check the height of your flame. Because at the end of a long day, Bosch believes cooking should bring joy, not frustration.

500 Series 24" Induction Cooktop

**24" 500 Series
NIT5469UC**

- 11" Cooking Zone
- 17 Power Levels
- Each Cooking Zone
  Has an Independent
  Countdown Timer
- SpeedBoost®

	500 Series
	Black – NIT5469UC
Element Performance	
Power of back left heating element	2,600 W
Power of back left heating element (in boost)	3,700 W
Power of back right heating element	1,800 W
Power of back right heating element (in boost)	3,100 W
Power of front right heating element	1,400 W
Power of front right heating element (in boost)	2,200 W
Burners with booster	All
Element Size	
Dimension of back left heating element	11"
Dimension of back right heating element	7"
Dimension of front right heating element	6"
Technical Details	
Watts	7,200 W
Circuit breaker	30 A
Volts	208 – 240 V
Frequency	60 Hz
Plug type	No plug
Power cord length	37"
Energy source	Electric
Dimensions & Weight	
Overall appliance dimensions (HxWxD)	1/4" +4 1/8" x 24" x 20 9/16"
Required cutout size (HxWxD)	4 1/8" x 22" x 19 1/4"
Minimum distance from counter front	2 1/4"
Minimum distance from rear wall	2"
Net weight	32 lbs

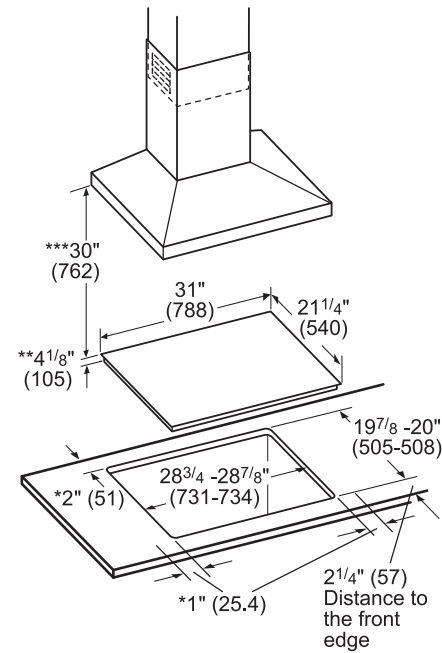**Optional Accessories**

HEZ390210
8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
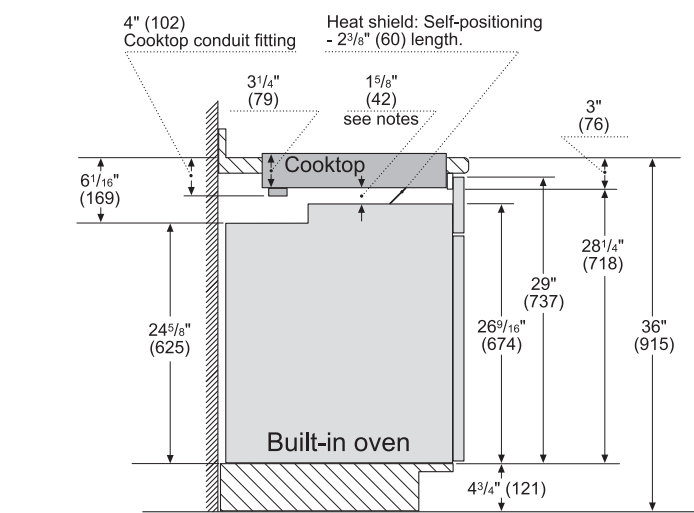10" AutoChef® Pan
for 8" and 9" Elements

500 Series 24" Induction Cooktop

24" Cooktop and Cutout Dimensions

*** 30" (762)

24" (592)

20 9/16" (522)

**4 1/8" (105)

19 1/4" (490)

22" (560)

*2" (51)

*2" (51)

2 1/4" (57)
Clearance from front edge

* Minimum clearance from the cooktop cutout to the wall
** Installed depth includes a gap of 1" (26 mm) for ventilation
*** Minimum clearance between the cooktop surface and lower edge of the exhaust hood.

measurements in inches (mm)

24" Cooktop Installation Above Wall Oven

3 39/64" (91.5)
Cooktop conduit fitting

Heat shield: Self positioning - 2 3/8" (60) length.

2 3/4" (68.5)

2 1/16" (52.5)
see notes

3" (76)

Cooktop

6 1/16" (169)

28 11/16" (728.5)

29" (737)

26 9/16" (674)

36" (915)

24 5/8" (625)

Built-in Oven

4 3/4" (121)

Notes:

Dimensions based on standard countertop height (36" with 4 3/4" toe kick including base plate).

The built-in oven can be installed below the induction cooktop as long as there is a minimum 1" (26) clearance between the bottom of the cooktop and the top of the oven.

measurements in inches (mm)

Electrical Location

max. 2 3/4" (68.5) + fitting/conduit 1" (23)

12" (300) approx.

min. 1" (26) air clearance

"J" box

conduit approx. 36" (~900)

measurements in inches (mm)

NOTE: Bosch induction cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

500 / 800 Series 30" Induction Cooktops

30" 500 Series
NIT5068UC

- 11" Cooking Zone
- 17 Power Levels
- Each Cooking Zone Has an Independent Countdown Timer
- SpeedBoost®

30" 800 Series
NIT8069UC (Frameless)
NIT8069SUC (Frame)

+ AutoChef®
+ Home Connect™
+ Hood Control
+ PreciseSelect® Control
+ Framed and Frameless Options

Home Connect

+ Indicates a step-up feature

	500 Series	800 Series
	Black – NIT5068UC	Black – NIT8069UC Black with Stainless Steel Frame – NIT8069SUC
General Properties		
Home Connect™ (Wi-Fi Enabled)	No	Yes
Controls	Touch	PreciseSelect® Touch
Element Performance		
Power of front left heating element	1,400 W	1,400 W
Power of front left heating element (in boost)	2,200 W	2,200 W
Power of back left heating element	2,200 W	2,200 W
Power of back left heating element (in boost)	3,700 W	3,700 W
Power of back right heating element	2,600 W	2,600 W
Power of back right heating element (in boost)	3,700 W	3,700 W
Power of front right heating element	1,400 W	1,400 W
Power of front right heating element (in boost)	2,200 W	2,200 W
Burners with booster	All	All
Element Size		
Dimension of front left heating element	6"	6"
Dimension of back left heating element	9"	9"
Dimension of back right heating element	11"	11"
Dimension of front right heating element	6"	6"
Technical Details		
Watts	7,200 W	7,200 W
Circuit breaker	30 A	30 A
Volts	208 – 240 V	208 – 240 V
Frequency	60 Hz	60 Hz
Plug type	No plug	No plug
Power cord length	37"	37"
Energy source	Electric	Electric
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	$1/4$" +4 $1/8$" x 31" x 21 $1/4$"	$1/4$" +4 $1/8$" x 31" x 21 $1/4$"
Required cutout size (HxWxD)	4 $1/8$" x 28 $7/8$" x 20"	4 $1/8$" x 28 $7/8$" x 20"
Minimum distance from counter front	2 $1/4$"	2 $1/4$"
Minimum distance from rear wall	2"	2"
Net weight	41 lbs	41 lbs

Optional Accessories

HEZ390210
8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
10" AutoChef® Pan
for 8" and 9" Elements

500 / 800 Series 30" Induction Cooktops

30" Cooktop and Cutout Dimensions

***30" (762)
**4 $1/8$" (105)
31" (788)
21 $1/4$" (540)
19 $7/8$ -20" (505-508)
28 $3/4$ -28 $7/8$" (731-734)
*2" (51)
*1" (25.4)
2 $1/4$" (57) Distance to the front edge

* Minimum distance from the cooktop cutout to the wall
** Installed depth includes 1" (26 mm) air clearance
*** Minimum distance between surface of the cooktop and lower edge of the exhaust hood.

Dimensions in inches (mm)

30" Cooktop Installation Above Wall Oven

4" (102) Cooktop conduit fitting
Heat shield: Self-positioning - 2 $3/8$" (60) length.
3 $1/4$" (79)
1 $5/8$" (42) see notes
3" (76)
6 $1/16$" (169)
Cooktop
28 $1/4$" (718)
29" (737)
24 $5/8$" (625)
26 $9/16$" (674)
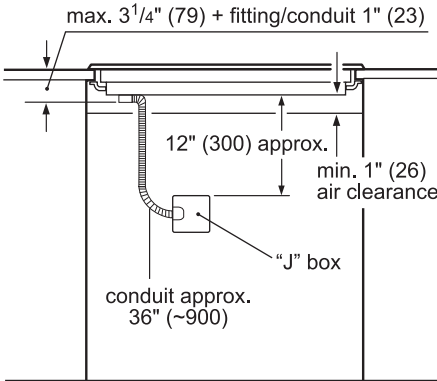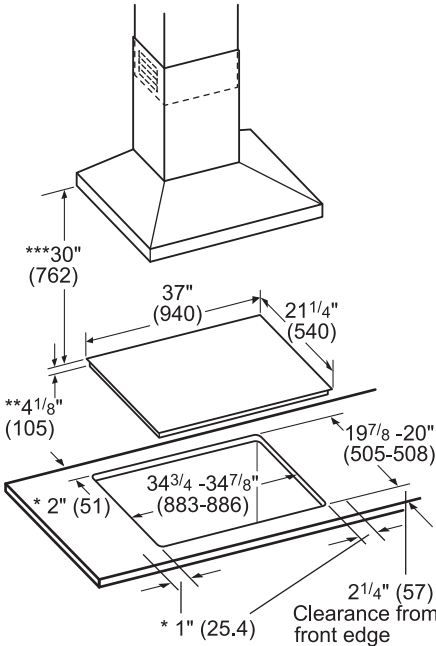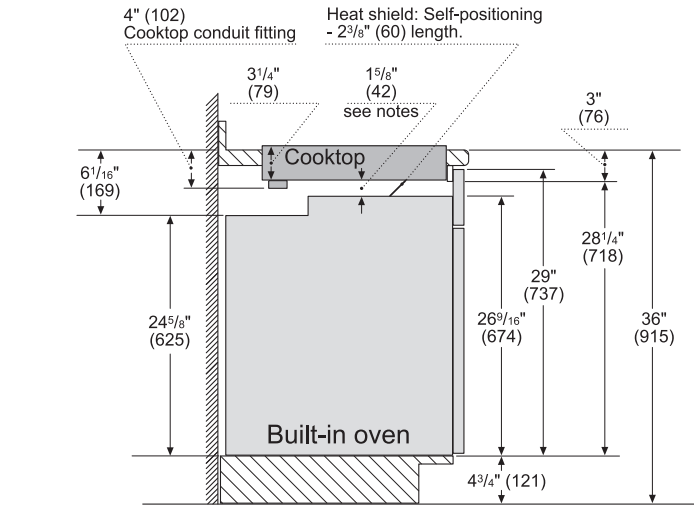36" (915)
Built-in oven
4 $3/4$" (121)

Notes:

Dimensions based on standard countertop height (36" with 4 $3/4$" toe kick including base plate).

The built-in oven can be installed below the induction cooktop as long as there is a minimum 1" (26) clearance between the bottom of the cooktop and the top of the oven.

measurements in inches (mm)

Electrical Location

max. 3 $1/4$" (79) + fitting/conduit 1" (23)
12" (300) approx.
min. 1" (26) air clearance
"J" box
conduit approx. 36" (~900)

Measurements in inches (mm)

NOTE: Bosch induction cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

500 / 800 Series 36" Induction Cooktops

36" 500 Series
NIT5668UC

- 12" Dual-Ring Center Cooking Zone
- 17 Power Levels
- Each Cooking Zone Has an Independent Countdown Timer
- SpeedBoost®

36" 800 Series
NIT8669UC (Frameless)
NIT8669SUC (Frame)

- **+** AutoChef®
- **+** Home Connect™
- **+** Hood Control
- **+** PreciseSelect® Control
- **+** Framed and Frameless Options

◇ Home Connect

+ Indicates a step-up feature

	500 Series	800 Series
	Black – NIT5668UC	Black – NIT8669UC Black with Stainless Steel Frame – NIT8669SUC
General Properties		
Home Connect™ (Wi-Fi Enabled)	No	Yes
Controls	Touch	PreciseSelect® Touch
Element Performance		
Power of front left heating element (in boost)	1,800 W (3,100 W)	1,800 W (3,100 W)
Power of back left heating element (in boost)	1,800 W (3,100 W)	1,800 W (3,100 W)
Power of center heating element (in boost)	3,300 / 2,200 W (5,400 / 3,700 W)	3,300 / 2,200 W (5,400 / 3,700 W)
Power of back right heating element (in boost)	1,400 W (2,200 W)	1,400 W (2,200 W)
Power of front right heating element (in boost)	2,200 W (3,700 W)	2,200 W (3,700 W)
Burners with booster	All	All
Element Size		
Dimension of front left heating element	7"	7"
Dimension of back left heating element	7"	7"
Dimension of center heating element	12", 9"	12", 9"
Dimension of back right heating element	6"	6"
Dimension of front right heating element	9"	9"
Technical Details		
Watts	9,600 W	9,600 W
Circuit breaker	40 A	40 A
Volts	208 – 240 V	208 – 240 V
Frequency	60 Hz	60 Hz
Plug type	No plug	No plug
Power cord length	37"	37"
Energy source	Electric	Electric
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	$5/16$" +4 $1/8$" x 37" x 21 $1/4$"	$5/16$" +4 $1/8$" x 37" x 21 $1/4$"
Required cutout size (HxWxD)	4 $1/8$" x 34 $7/8$" x 20"	4 $1/8$" x 34 $7/8$" x 20"
Minimum distance from counter front	2 $1/4$"	2 $1/4$"
Minimum distance from rear wall	2"	2"
Net weight	53 lbs	53 lbs

Optional Accessories

HEZ390210
8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
10" AutoChef® Pan
for 8" and 9" Elements

500 / 800 Series 36" Induction Cooktops

36" Cooktop and Cutout Dimensions

***30" (762)
37" (940)
21 1/4" (540)
**4 1/8" (105)
19 7/8 -20" (505-508)
34 3/4 -34 7/8" (883-886)
* 2" (51)
2 1/4" (57) Clearance from front edge
* 1" (25.4)

* Minimum clearance from the cooktop cutout to the wall
** Installed depth includes gap of 1" (26 mm) to the ventilation
*** Minimum clearance between surface of the cooktop and lower edge of the exhaust hood.
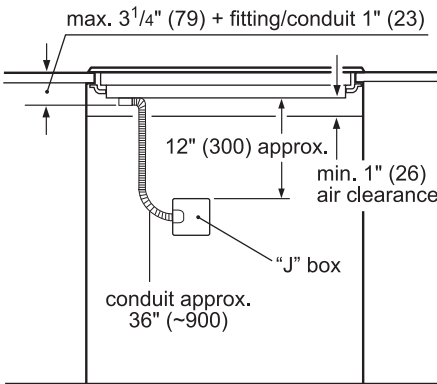
measurements in inches (mm)

36" Cooktop Installation Above Wall Oven

4" (102) Cooktop conduit fitting
Heat shield: Self-positioning - 2 3/8" (60) length.
3 1/4" (79)
1 5/8" (42) see notes
3" (76)
6 1/16" (169)
Cooktop
28 1/4" (718)
29" (737)
24 5/8" (625)
26 9/16" (674)
36" (915)
Built-in oven
4 3/4" (121)

Notes:

Dimensions based on standard countertop height (36" with 4 3/4" toe kick including base plate).

The built-in oven can be installed below the induction cooktop as long as there is a minimum 1" (26) clearance between the bottom of the cooktop and the top of the oven.

Electrical Location

max. 3 1/4" (79) + fitting/conduit 1" (23)
12" (300) approx.
min. 1" (26) air clearance
"J" box
conduit approx. 36" (~900)

Measurements in inches (mm)

NOTE: Bosch induction cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.
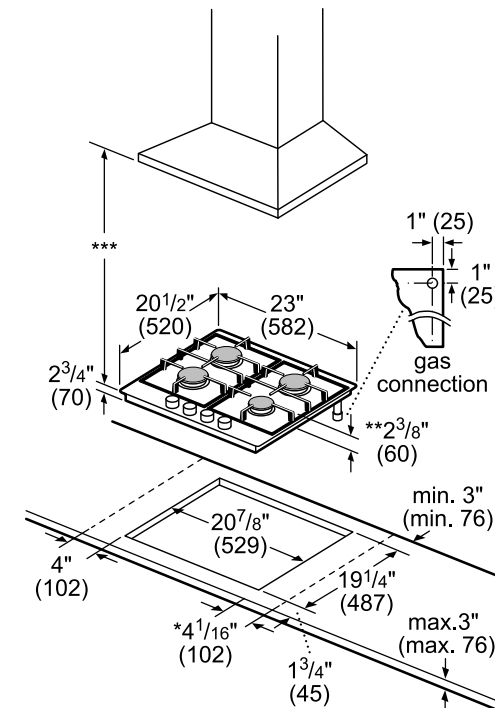
500 Series 24" Gas Cooktop

**24" 500 Series
NGM5456UC**

- 11.5K Max. BTU Performance
- 4 Burners
- Metal Knobs

500 Series	
Stainless Steel – NGM5456UC	
General Properties	
Knob material	Metal
Sealed burners	Yes
Grate material	Cast iron
Element Performance	
Total BTU load (NG / LP)	30,800 / 27,000
Power of front left burner (NG / LP)	5,000 / 5,000
Power of back left burner (NG / LP)	9,300 / 7,000
Power of center burner (NG / LP)	N/A
Power of back right burner (NG / LP)	11,500 / 10,000
Power of front right burner (NG / LP)	5,000 / 5,000
Technical Details	
Watts	360 W
Circuit breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug type	3 prong
Power cord length	60"
Energy source	Gas
Convertible to LP (kit required)	Yes
Dimensions & Weight	
Overall appliance dimensions (HxWxD)	2 $3/4$" x 23" x 20 $1/2$"
Required cutout size (HxWxD)	2 $3/4$" x 20 $7/8$" x 19 $1/4$"
Minimum distance from counter front	1 $3/4$"
Minimum distance from rear wall	3"
Net weight	32 lbs
Accessories – Included	
Included	LP conversion kit

500 Series 24" Gas Cooktop

24" Cooktop and Cutout Dimensions

1" (25)
1" (25)
20$1/2$" (520)
23" (582)
2$3/4$" (70)
***
gas connection
**2$3/8$" (60)
min. 3" (min. 76)
20$7/8$" (529)
4" (102)
19$1/4$" (487)
*4$1/16$" (102)
1$3/4$" (45)
max.3" (max. 76)

* 5$1/16$" required when installed with a built-in oven. Reference the Bosch under cooktop built-in guide for more details.

** Dimension from countertop to top of grates.
*** When installed in combination with a hood, refer to hood manufacturer's requirements for installation.

Measurements in inches (mm)
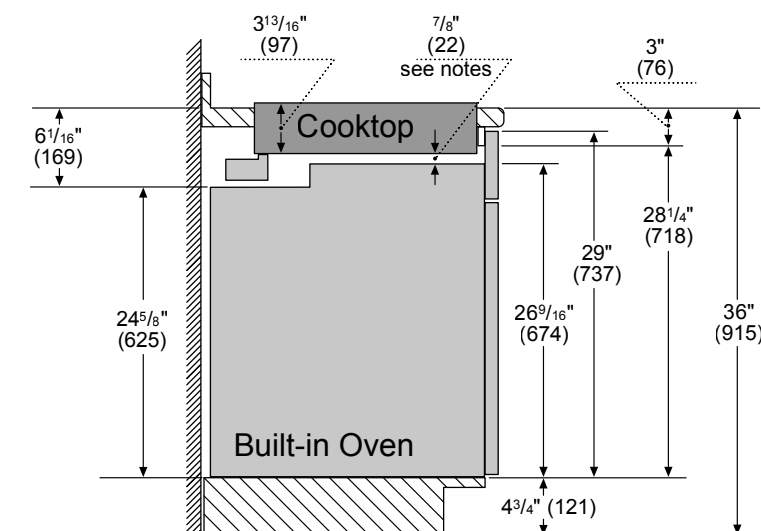
24" Cooktop Gas Location
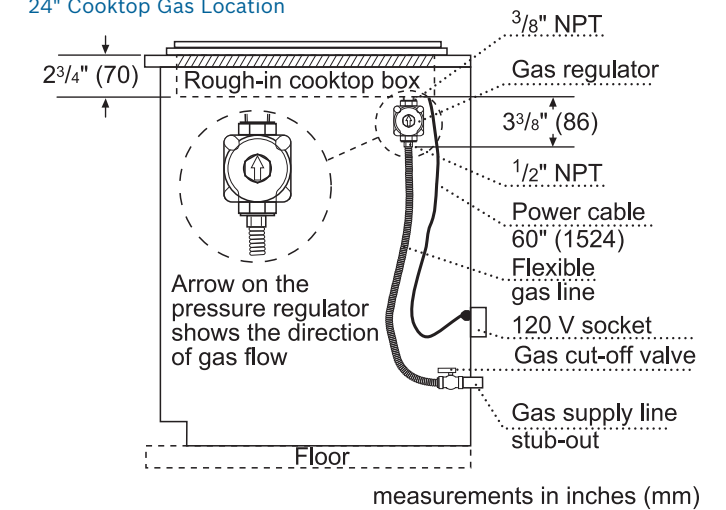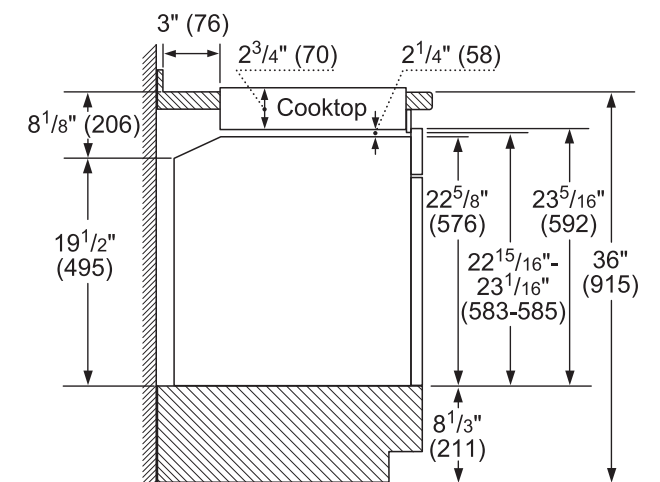
$3/8$" NPT
Gas regulator
2$3/4$" (70)
Rough-in cooktop box
3$3/8$" (86)
$1/2$" NPT
Power cable 60" (1524)
Flexible gas line
120 V socket
Arrow on the pressure regulator shows the direction of gas flow
Gas cut-off valve
Gas supply line stub-out
Floor

measurements in inches (mm)

24" Cooktop Installation Above Wall Oven

3" (76)
2$3/4$" (70)
2$1/4$" (58)
8$1/8$" (206)
Cooktop
22$5/8$" (576)
23$5/16$" (592)
19$1/2$" (495)
22$15/16$"- 23$1/16$" (583–585)
36" (915)
8$1/3$" (211)

Notes: Dimensions based on standard countertop height (36" with 4$3/4$" toe kick including base plate).

The built-in oven can be installed below the cooktop as long as there is at least 2$1/4$" (58) of space between the bottom flat surface of the cooktop and the top of the oven.

Please allow at least 2" (51) from the countertop front edge to the edge of the cutout.

measurements in inches (mm)

**NOTE: Bosch gas cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.**

24" Gas Cooktop — 500 Series

500 / 800 Series 30" Gas Cooktops

30" 500 Series
NGM5056UC

- 16K Max. BTU Performance
- Black Metal Knobs
- OptiSim® burner

30" 800 Series
NGM8056UC (Stainless Steel)
NGM8046UC (Black w/Black Stainless Knobs)

+ 19K Max. BTU Performance
+ 5 Burners
+ Distinctive Red LED Light Burner Indicators
+ Stainless Steel Knobs (Black Stainless Metal Knobs on Black Model)

+ Indicates a step-up feature

|	500 Series	800 Series
	Stainless Steel – NGM5056UC	Stainless Steel – NGM8056UC Black w/Black Stainless Knobs – NGM8046UC
General Properties		
Knob material	Metal	Metal
Sealed burners	Yes	Yes
Grate material	Cast iron	Cast iron
Element Performance		
Total BTU load (NG / LP)	41,500 / 38,200	NGM8056UC: 50,000 / 43,200 NGM8046UC: 48,600 / 43,200
Power of front left burner (NG / LP)	10,000 / 9,100	NGM8056UC: 10,000 / 9,100 NGM8046UC: 9,300 / 9,100
Power of back left burner (NG / LP)	10,000 / 9,100	5,500 / 5,000
Power of center burner (NG / LP)	N/A	18,000 / 15,000
Power of back right burner (NG / LP)	5,500 / 5,000	NGM8056UC: 10,000 / 9,100 NGM8046UC: 9,300 / 9,100
Power of front right burner (NG / LP)	16,000 / 15,000	5,500 / 5,000
Technical Details		
Watts	360 W	360 W
Circuit breaker	15 A	15 A
Volts	120 V	120 V
Frequency	60 Hz	60 Hz
Plug type	3 prong	3 prong
Power cord length	60"	60"
Energy source	Gas	Gas
Convertible to LP (kit required)	Yes	Yes
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	3 $13/16$" x 31" x 21 $1/4$"	3 $13/16$" x 31" x 21 $1/4$"
Required cutout size (HxWxD)	3 $13/16$" x 28 $15/16$" x 19 $1/8$"	3 $13/16$" x 28 $15/16$" x 19 $1/8$"
Minimum distance from counter front	1 $7/8$"	1 $7/8$"
Minimum distance from rear wall	3"	3"
Net weight	37 lbs	37 lbs
Accessories – Included		
Included	LP conversion kit	LP conversion kit

Optional Accessories

HEZ27751
Cooktop Control Knob Kit,
Black Stainless Steel

500 / 800 Series 30" Gas Cooktops

**30" Cooktop and Cutout Dimensions**

1" (25)
9/16" (15)
21 1/4" (540)
31" (788)
gas connection
3 13/16" (97)
*1 7/16" (37)
28 15/16" (735)
3" (76)
19 1/8" (486)
max. 3" (76)
13" (330)
13" (330)
1 7/8" (48)
**

* Dimension from countertop to top of grates in front of 1 7/16" (37).
** When installed in combination with a hood, refer to hood manufacturers requirements for installation.

Measurement in inches (mm)

30" Cooktop Gas Location
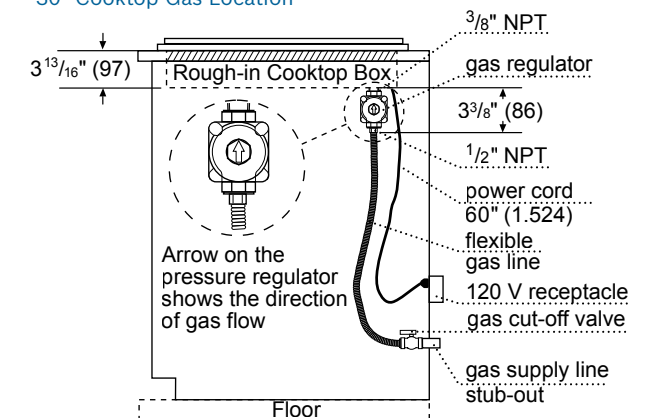
3 13/16" (97)
3/8" NPT
Rough-in Cooktop Box
gas regulator
3 3/8" (86)
1/2" NPT
power cord 60" (1.524)
flexible gas line
120 V receptacle
gas cut-off valve
gas supply line stub-out
Arrow on the pressure regulator shows the direction of gas flow
Floor

Measurements in inches (mm)

30" Cooktop Installation Above Wall Oven

3 13/16" (97)
7/8" (22) see notes
3" (76)
Cooktop
6 1/16" (169)
28 1/4" (718)
29" (737)
36" (915)
24 5/8" (625)
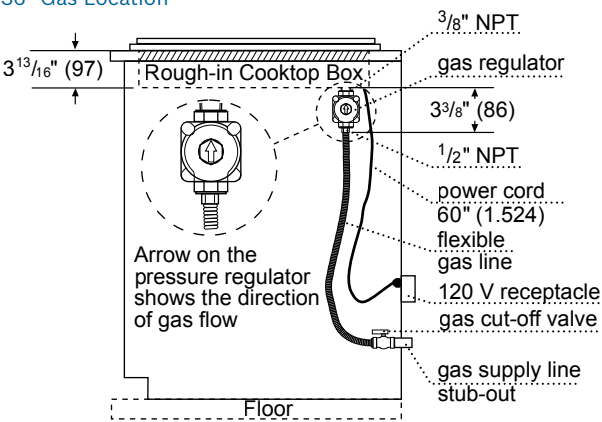26 9/16" (674)
Built-in Oven
4 3/4" (121)

Notes:

Dimensions based on standard countertop height (36" with 4 3/4" toe kick including base plate).

The built-in oven can be installed below the gas cooktop as long as there is no contact between the bottom of the cooktop and the top of the oven.

Measurements in inches (mm)

NOTE: Bosch gas cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

500 / 800 Series 36" Gas Cooktops

36" 500 Series
NGM5656UC

- 16K Max. BTU Performance
- Black Metal Knobs
- OptiSim® burner

36" 800 Series
NGM8656UC (Stainless Steel)
NGM8646UC (Black w/Black Stainless Knobs)

+ 19K Max. BTU Performance
+ Distinctive Red LED Light Burner Indicators
+ Metal Knobs (Black Stainless Metal Knobs on Black Model)

+ Indicates a step-up feature

	500 Series	800 Series
	Stainless Steel – NGM5656UC	Stainless Steel – NGM8656UC Black w/Black Stainless Knobs – NGM8646UC
General Properties		
Knob material	Metal	Metal
Sealed burners	Yes	Yes
Grate material	Cast iron	Cast iron
Element Performance		
Total BTU load (NG / LP)	51,500 / 47,300	NGM8656UC: 58,500 / 47,300 NGM8646UC: 52,400 / 47,300
Power of front left burner (NG / LP)	10,000 / 9,100	NGM8656UC: 12,000 / 9,100 NGM8646UC: 9,300 / 9,100
Power of back left burner (NG / LP)	10,000 / 9,100	NGM8656UC: 10,000 / 9,100 NGM8646UC: 9,300 / 9,100
Power of center burner (NG / LP)	16,000 / 15,000	19,000 / 15,000
Power of back right burner (NG / LP)	5,500 / 5,000	5,500 / 5,000
Power of front right burner (NG / LP)	10,000 / 9,100	NGM8656UC: 12,000 / 9,100 NGM8646UC: 9,300 / 9,100
Technical Details		
Watts	360 W	360 W
Circuit breaker	15 A	15 A
Volts	120 V	120 V
Frequency	60 Hz	60 Hz
Plug type	3 prong	3 prong
Power cord length	60"	60"
Energy source	Gas	Gas
Convertible to LP (kit required)	Yes	Yes
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	3 $13/16$" x 37" x 21 $1/4$"	3 $13/16$" x 37" x 21 $1/4$"
Required cutout size (HxWxD)	3 $13/16$" x 34 $15/16$" x 19 $1/8$"	3 $13/16$" x 34 $15/16$" x 19 $1/8$"
Minimum distance from counter front	1 $7/8$"	1 $7/8$"
Minimum distance from rear wall	3"	3"
Net weight	39 lbs	39 lbs
Accessories – Included		
Included	LP conversion kit	LP conversion kit

Optional Accessories

HEZ298102
Wok Ring

HEZ27751
Cooktop Control Knob Kit,
Black Stainless Steel

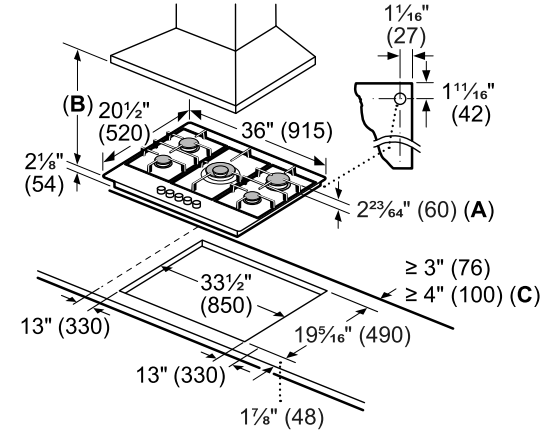# 500 / 800 Series 36" Gas Cooktops

36" Cooktop and Cutout Dimensions
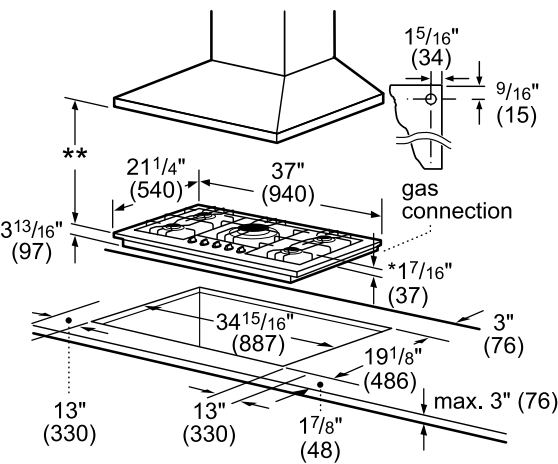
* Dimension from countertop to top of grates in front of 1$7/16$" (37).
** When installed in combination with a hood, refer to hood manufacturers requirements for installation.

Measurement in inches (mm)
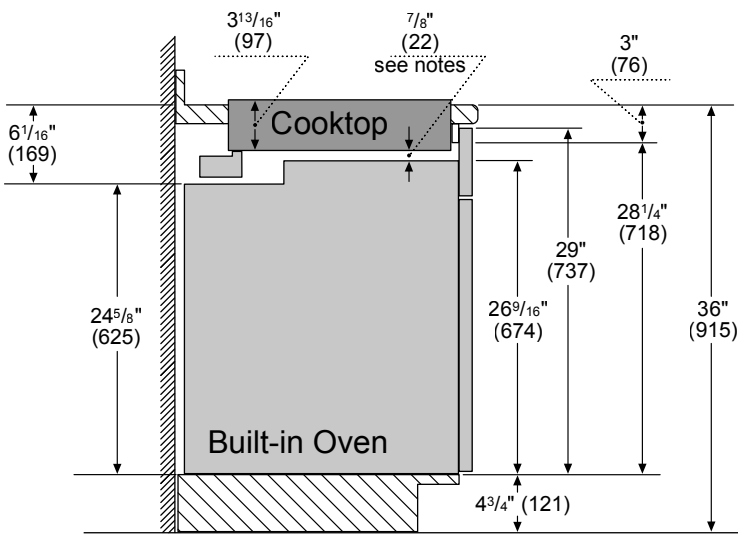
36" Gas Location

Measurements in inches (mm)

36" Cooktop Installation Above Wall Oven

Notes:

Dimensions based on standard countertop height (36" with 4$3/4$" toe kick including base plate).

The built-in oven can be installed below the gas cooktop as long as there is no contact between the bottom of the cooktop and the top of the oven.

Measurements in inches (mm)

NOTE: Bosch gas cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

800 Series Gas Cooktops

30" 800 Series
NGM8057UC
- 17K Max. BTU Performance
- 5 Burners
+ FlameSelect®
+ Dual Flame Power Burner
+ Low profile stainless steel
   cooking surface

36" 800 Series
NGM8657UC
- 17K Max. BTU Performance
- 5 Burners
+ FlameSelect®
+ Dual Flame Power Burner
+ Low profile stainless steel
   cooking surface

+ Indicates a step-up feature

	30"	36"
	Stainless Steel – NGM8057UC	Stainless Steel – NGM8657UC
General Properties		
Knob material	Stainless steel appearance	Stainless steel appearance
Sealed burners	Yes	Yes
Grate material	Cast iron	Cast iron
Element Performance		
Total BTU load (NG / LP)	41,400 / 40,100	41,400 / 40,100
Power of front left burner (NG / LP) OptiSim®	3,400 / 3,400	3,400 / 3,400
Power of back left burner (NG / LP)	6,000 / 6,000	6,000 / 6,000
Power of center burner (NG / LP) Dual-flame	17,000 / 15,700	17,000 / 15,700
Power of back right burner (NG / LP)	9,000 / 9,000	9,000 / 9,000
Power of front right burner (NG / LP)	6,000 / 6,000	6,000 / 6,000
Technical Details		
Watts	360 W	360 W
Circuit breaker	15 A	15 A
Volts	120 V	120 V
Frequency	60 Hz	60 Hz
Plug type	3 prong	3 prong
Power cord length	40"	40"
Energy source	Natural gas (factory set)	Natural gas (factory set)
Convertible to LP (kit required)	Yes	Yes
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	2 23/64" x 29 1/2" x 20 1/2"	2 23/64" x 36" x 20 1/2"
Required cutout size (HxWxD)	1 1/4" x 28 15/16" x 19 1/8"	1 1/4" x 33 1/2" x 19 5/16"
Minimum distance from counter front	1 7/8"	1 7/8"
Minimum distance from rear wall	3"	3"
Net weight	38 lbs	42 lbs
Accessories – Included		
Included	LP conversion kit, OptiSim® cap	LP conversion kit, OptiSim® cap

Optional Accessories

HEZ298107
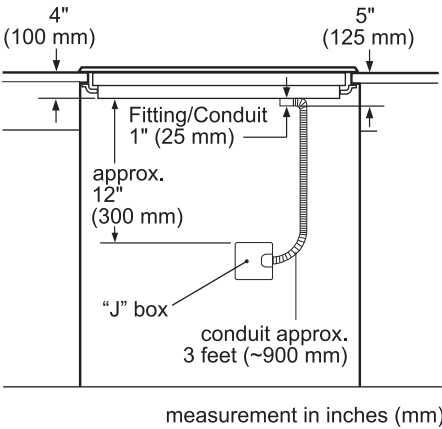Wok Ring

HEZ27754
FlameSelect® 800 Series
Metal Control Knob Kit,
Stainless Steel

800 Series Gas Cooktops

30" Cooktop and Cutout Dimensions
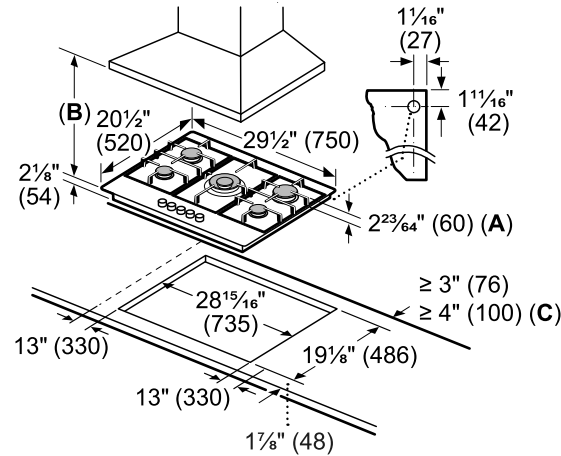
A: Dimension from countertop to top
   of grates in front of 2²³⁄₆₄" (60)
B: When installed in combination
   with a hood, refer to hood
   manufacturer's requirements
   for installation
C: For installation in a kitchen island

measurements in inches (mm)

36" Cooktop and Cutout Dimensions

A: Dimension from countertop to top
   of grates in front of 2²³⁄₆₄" (60)
B: When installed in combination
   with a hood, refer to hood
   manufacturer's requirements
   for installation
C: For installation in a kitchen island

measurements in inches (mm)

30" & 36" Cooktop Installation Above Wall Oven

measurements in inches (mm)
Built-in oven - under gas cooktop
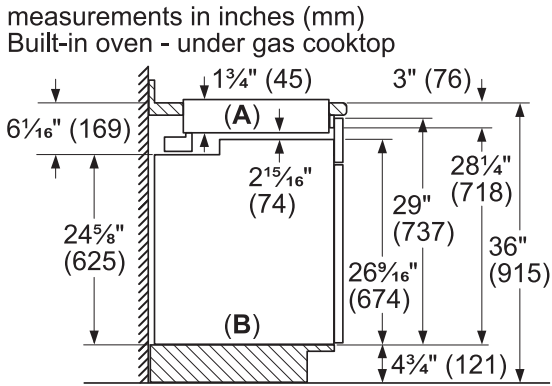
Dimensions based on standard
countertop height (36" with 4¾" toe kick
including base plate).
A: Cooktop
B: Built-in oven

Gas Location

measurements in inches (mm)

A: Rough-in Cooktop Box
B: Arrow on the back of the
   Pressure Regulator shows
   the direction of gas flow
C: Pressure Regulator
D: ½" Female Pipe Threads
E: Flexible Gas Line
F: Power Cord
   (40 inches /1.016 mm)
G: 120 Volt Receptacle
H: Gas Cut-off Valve
J: Gas Supply Line Stub-out
K: Floor

**NOTE: Bosch gas cooktops can
be installed in combination with
other Bosch cooking products.
See pages 54–55 for details.**

500 Series 24" Electric Cooktop

24" 500 Series
NEM5466UC

- 8", 2,200 W Element
- 6", 1,850 W Element
- Residual Heat Indicator
- Stainless Steel Color Knobs

500 Series	
Black Frameless – NEM5466UC	
General Properties	
Knob material	Plastic
Element Performance	
Power of front left heating element	1,850 W
Power of back left heating element	2,200 W
Power of back right heating element	1,200 W
Power of front right heating element	1,800 W
Element Size	
Dimension of front left heating element	6"
Dimension of back left heating element	8"
Dimension of back right heating element	6"
Dimension of front right heating element	7"
Technical Details	
Watts	7,100 W
Circuit breaker	30 A
Volts	208–240 V
Frequency	60 Hz
Plug type	No plug
Energy source	Electric
Dimensions & Weight	
Overall appliance dimensions (HxWxD)	$1/8$" +4 $1/3$" x 23" x 20 $1/5$"
Required cutout size (HxWxD)	4 $1/3$" x 22" x 19 $1/4$"
Minimum distance from counter front	2 $1/4$"
Minimum distance from rear wall	2"
Net weight	20 lbs

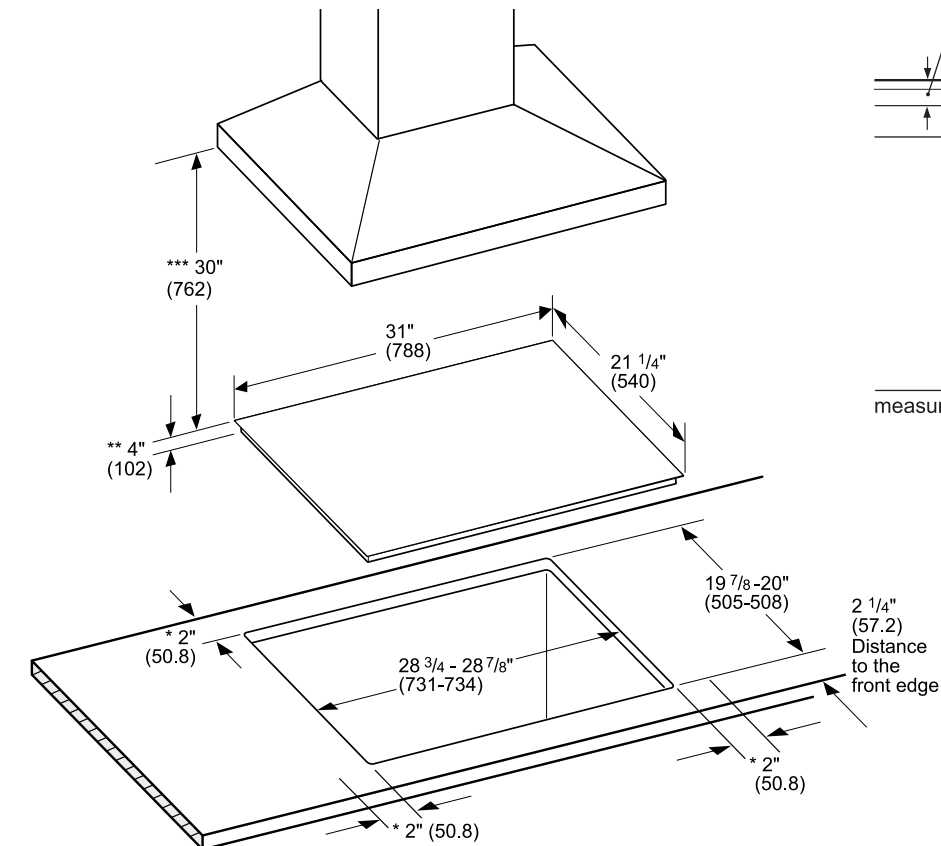**Optional Accessories**

HEZ390210
8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
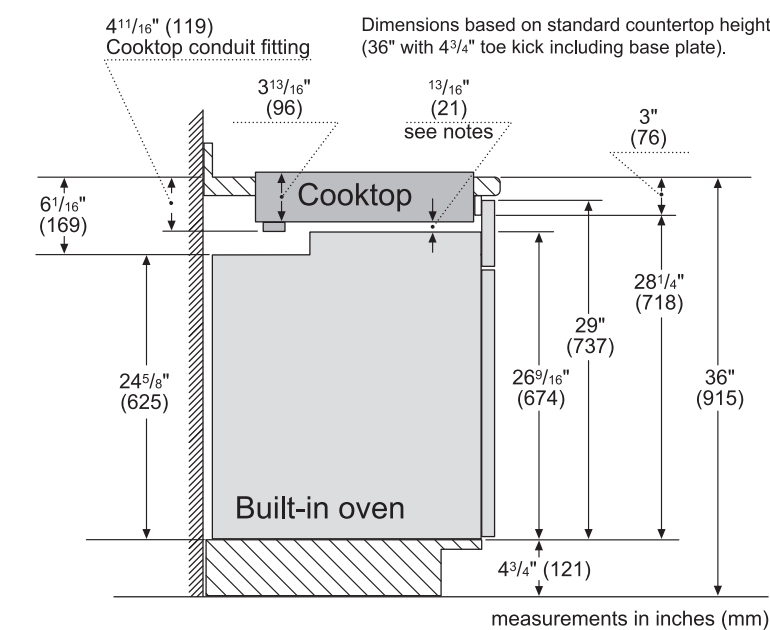10" AutoChef® Pan
for 8" and 9" Elements

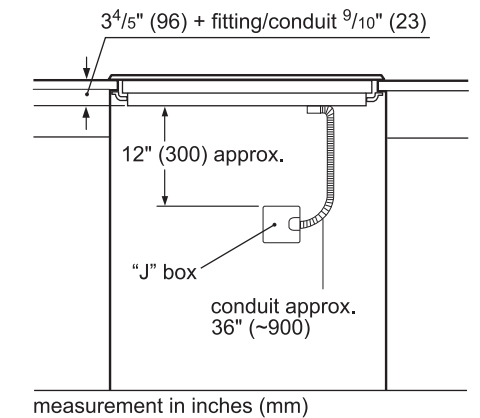# 500 Series 24" Electric Cooktop

Cooktop and Cutout Dimensions

*** 30" (762)
20^{11}/$_{16}$" (526)
23^{1}/$_{2}$" (596)
** 4" (102)
22" (560)
19^{1}/$_{4}$" (490)
*2" (50.8)
*2" (50.8)
*2" (50.8)
2^{1}/$_{4}$" (57.2)
Clearance from front edge
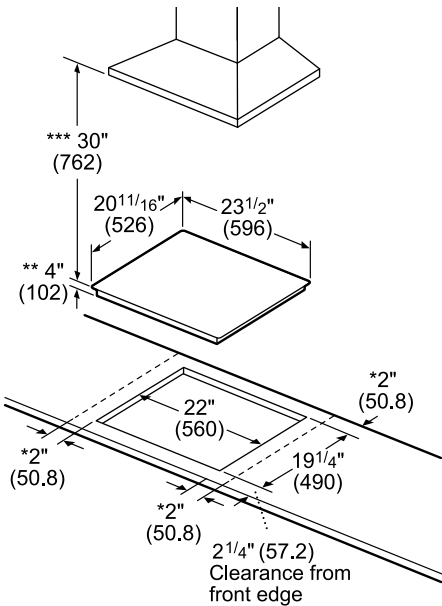
* Minimum clearance from the cooktop cutout to the wall
** Maximum cutout depth
*** Minimum clearance between the cooktop surface and lower edge of the exhaust hood.

measurements in inches (mm)

Gas Location

4" (100 mm)
5" (125 mm)
Fitting/Conduit 1" (25 mm)
approx. 12" (300 mm)
"J" box
conduit approx. 3 feet (~900 mm)

measurement in inches (mm)

Cooktop Installation Above Wall Oven

min. 2" (min. 51)
4" (102)   1" (25)
Cooktop
8^{1}/$_{8}$" (206)
19^{1}/$_{2}$" (495)
22^{5}/$_{8}$" (576)
23^{5}/$_{16}$" (592)
22^{15}/$_{16}$"- 23^{1}/$_{16}$" (583–585)
36" (915)
8^{1}/$_{3}$" (211)
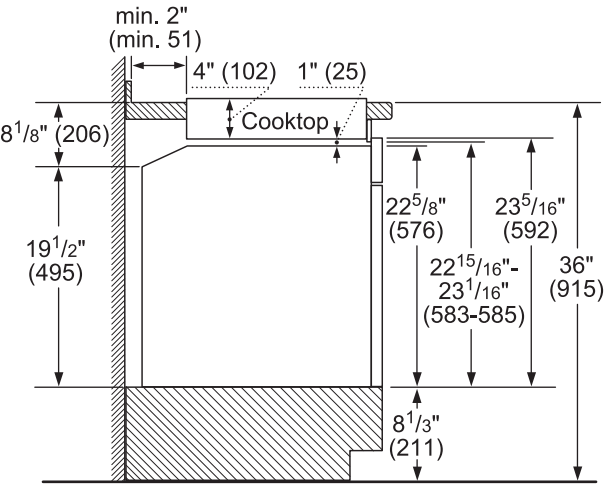
Notes: Dimensions based on standard countertop height (36" with 4^{3}/$_{4}$" toe kick including base plate).

The built-in oven can be installed below the cooktop as long as there is at least 1" (25) of space between the bottom flat surface of the cooktop and the top of the oven.

Please allow at least 2" (51) from the countertop front edge to the edge of the cutout.

measurements in inches (mm)

NOTE: Bosch electric cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

24" Electric Cooktop — 500 Series

500 / 800 Series 30" Electric Cooktops

30" 500 Series
NEM5066UC

- 7" Dual-Ring Element
- 9", 2,500 W Element
- Residual Heat Indicator
- Stainless Steel Color Knobs

30" 800 Series
NET8068UC (Frameless)
NET8068SUC (Frame)

+ PreciseSelect® Control
+ 9", 3,600 W Dual-Ring Element
+ Countdown Element Shut Off Timer
+ Framed and Frameless Options

+ Indicates a step-up feature

	500 Series	800 Series
	Black Frameless – NEM5066UC	Black Frameless – NET8068UC Black with Stainless Steel Frame – NET8068SUC
General Properties		
Knob material	Stainless steel color – plastic	N/A
Element Performance		
Power of front left heating element	1,700 / 700 W	1,800 W
Power of back left heating element	1,800 W	1,800 W
Power of back right heating element	1,200 W	3,600 / 1,400 W
Power of front right heating element	2,500 W	1,200 W
Element Size		
Dimension of front left heating element	7", 5"	7"
Dimension of back left heating element	7"	7"
Dimension of back right heating element	6"	9", 6"
Dimension of front right heating element	9"	6"
Technical Details		
Watts	7,200 W	8,300 W
Circuit breaker	30 A	40 A
Volts	208–240 V	208–240 V
Frequency	60 Hz	60 Hz
Plug type	No plug	No plug
Energy source	Electric	Electric
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	1/4" +4" x 31" x 21 1/4"	1/4" +4" x 31" x 21 1/4"
Required cutout size (HxWxD)	4" x 28 7/8" x 20"	4" x 28 7/8" x 20"
Minimum distance from counter front	2 1/4"	2 1/4"
Minimum distance from rear wall	2"	2"
Net weight	25 lbs	27 lbs

Optional Accessories

HEZ390210
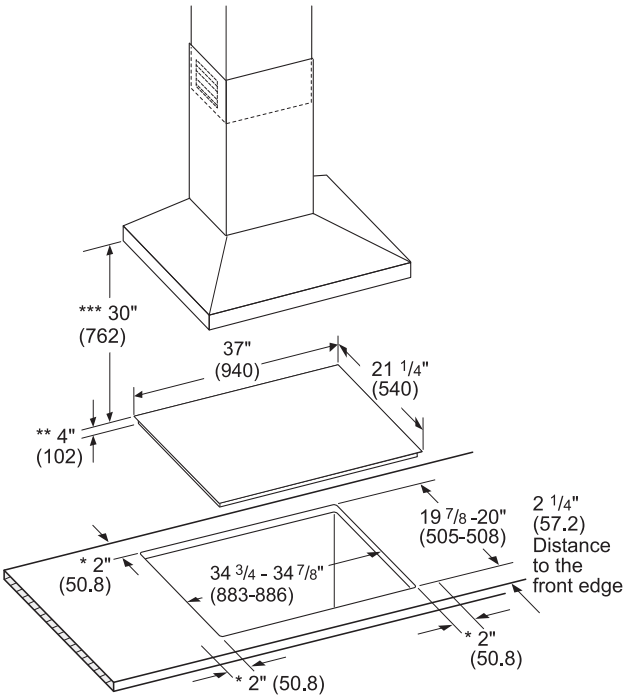8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
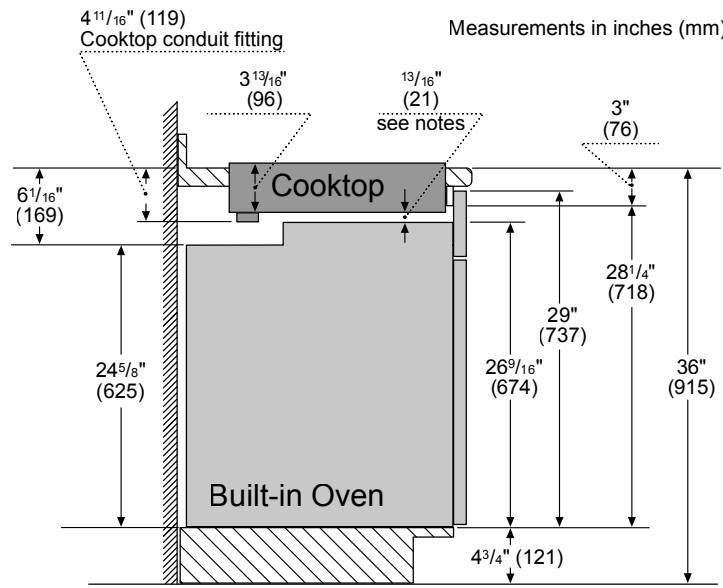10" AutoChef® Pan
for 8" and 9" Elements

500 / 800 Series 30" Electric Cooktops

30" Cooktop and Cutout Dimensions

*** 30" (762)
** 4" (102)
31" (788)
21 1/4" (540)
19 7/8"-20" (505-508)
2 1/4" (57.2) Distance to the front edge
* 2" (50.8)
28 3/4" - 28 7/8" (731-734)
* 2" (50.8)
* 2" (50.8)

* Minimum distance from the cooktop cutout to the wall
** Maximum cutout depth
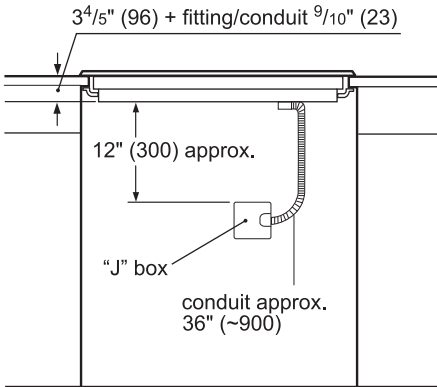*** Minimum distance between the cooktop surface and lower edge of the exhaust hood.

Dimensions in inches (mm)

500 Series – Cooktop Electrical Location

3⁴/₅" (96) + fitting/conduit ⁹/₁₀" (23)
12" (300) approx.
"J" box
conduit approx. 36" (~900)

measurement in inches (mm)

Cooktop Installation Above Wall Oven

4¹¹/₁₆" (119) Cooktop conduit fitting
Dimensions based on standard countertop height (36" with 4³/₄" toe kick including base plate).
3¹³/₁₆" (96)
¹³/₁₆" (21) see notes
3" (76)
6¹/₁₆" (169)
Cooktop
28¹/₄" (718)
29" (737)
26⁹/₁₆" (674)
24⁵/₈" (625)
36" (915)
Built-in oven
4³/₄" (121)
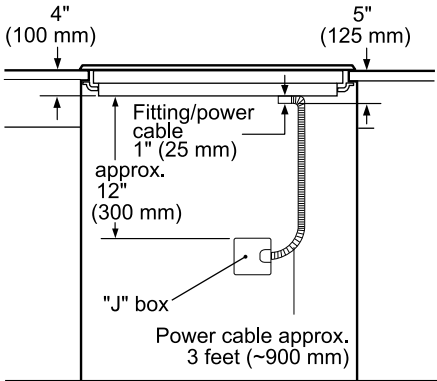
measurements in inches (mm)

The built-in oven can be installed below the electric cooktop as long as there is no contact between the bottom of the cooktop and the top of the oven.

800 Series – Cooktop Electrical Location

4" (100 mm)
5" (125 mm)
Fitting/power cable 1" (25 mm) approx.
12" (300 mm)
"J" box
Power cable approx. 3 feet (~900 mm)

measurement in inches (mm)

NOTE: Bosch electric cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

500 / 800 Series 36" Electric Cooktops

36" 500 Series
NEM5666UC

- Residual Heat Indicator
- 9", 2,500 W Dual-Ring Element
- 7", 1,700 W Dual-Ring Element
- Stainless Steel Color Knobs

36" 800 Series
NET8668UC (Frameless)
NET8668SUC (Frame)

+ PreciseSelect® Control
+ 9", 3,600 W Center Element
+ Countdown Element Shut Off Timer
+ Framed and Frameless Options
+ SpeedBoost®

+ Indicates a step-up feature

	500 Series	800 Series
	Black Frameless – NEM5666UC	Black Frameless – NET8668UC Black with Stainless Steel Frame – NET8668SUC
General Properties		
Knob material	Stainless steel color – plastic	N/A
Element Performance		
Power of front left heating element	1,700 / 700 W	1,800 W
Power of back left heating element	1,800 W	1,800 W
Power of center heating element	1,800 W	3,600 / 1,400 W
Power of back right heating element	1,200 W	1,200 W
Power of front right heating element	2,500 / 1,100 W	1,900 / 800 W
Element Size		
Dimension of front left heating element	7", 5"	7"
Dimension of back left heating element	7"	7"
Dimension of center heating element	7"	9", 6"
Dimension of back right heating element	6"	6"
Dimension of front right heating element	9", 6"	8", 5"
Technical Details		
Watts	9,000 W	10,200 W
Circuit breaker	40 A	50 A
Volts	208–240 V	208–240 V
Frequency	60 Hz	60 Hz
Plug type	No plug	No plug
Energy source	Electric	Electric
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	$1/4$" +4" x 37" x 21 $1/4$"	$1/4$" +4" x 37" x 21 $1/4$"
Required cutout size (HxWxD)	4" x 34 $7/8$" x 20"	4" x 34 $7/8$" x 20"
Minimum distance from counter front	2 $1/4$"	2 $1/4$"
Minimum distance from rear wall	2"	2"
Net weight	30 lbs	31 lbs

Optional Accessories

HEZ390210
8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
10" AutoChef® Pan
for 8" and 9" Elements

500 / 800 Series 36" Electric Cooktops

36" Cooktop and Cutout Dimensions

*** 30" (762)
** 4" (102)
37" (940)
21 1/4" (540)
19 7/8"-20" (505–508)
2 1/4" (57.2) Distance to the front edge
* 2" (50.8)
34 3/4 - 34 7/8" (883–886)
* 2" (50.8)
* 2" (50.8)

* Minimum distance from the cooktop cutout to the wall
** Maximum cutout depth
*** Minimum distance between the cooktop surface and lower edge of the exhaust hood.

Dimensions in inches (mm)

Cooktop Installation Above Wall Oven

4 $11/16$" (119) Cooktop conduit fitting
Measurements in inches (mm)
3 $13/16$" (96)
$13/16$" (21) see notes
3" (76)
6 $1/16$" (169)
Cooktop
28 $1/4$" (718)
29 (737)
26 $9/16$" (674)
36" (915)
24 $5/8$" (625)
Built-in Oven
4 $3/4$" (121)

Dimensions based on standard countertop height (36" with 4$3/4$" toe kick including base plate).

The built-in oven can be installed below the electric cooktop as long as there is no contact between the bottom of the cooktop and the top of the oven.

500 Series – Cooktop Electrical Location

3 $4/5$" (96) + fitting/conduit $9/10$" (23)
12" (300) approx.
"J" box
conduit approx. 36" (~900)

measurement in inches (mm)

800 Series – Cooktop Electrical Location

4" (100 mm)
5" (125 mm)
Fitting/power cable 1" (25 mm) approx.
12" (300 mm)
"J" box
Power cable approx. 3 feet (~900 mm)

measurement in inches (mm)

NOTE: Bosch electric cooktops can be installed in combination with other Bosch cooking products. See pages 54–55 for details.

800 Series Gas Rangetops

30" 800 Series
RGM8058UC

- Commercial Design
- 18,000 BTU Dual Flame Ring Power Burner
- 4 Burners
- Dishwasher-safe Grates
- OptiSim® burner
- Stainless Steel Exterior & Knobs

36" 800 Series
RGM8658UC

- Commercial Design
- 18,000 BTU Dual Flame Ring Power Burner
- 6 Burners
- Dishwasher-safe Grates
- OptiSim® burner
- Stainless Steel Exterior & Knobs

	30"	36"
	Stainless Steel – RGM8058UC	Stainless Steel – RGM8658UC
General Properties		
Number of Burners	4	6
Knob material	Metal	Metal
Control location	Up Front	Up Front
Sealed burners	Yes	Yes
Ignition system	Electric; flame failure device	Electric; flame failure device
Cooktop surface material	Porcelain coated steel	Porcelain coated steel
Grate material	Cast iron	Cast iron
Grate features	Continuous grates; dishwasher safe	Continuous grates; dishwasher safe
Element Performance		
Total BTU load (NG / LP)	47,000 / 47,000	77,000 / 77,000
Power of front left burner (NG / LP) OptiSim®	12,000 / 12,000	18,000 / 18,000
Power of back left burner (NG / LP)	12,000 / 12,000	12,000 / 12,000
Power of front center burner (NG / LP)	N/A	12,000 / 12,000
Power of back center burner (NG / LP)	N/A	12,000 / 12,000
Power of back right burner (NG / LP) Opti-Sim®	5,000 / 5,000	5,000 / 5,000
Power of front right burner (NG / LP) Dual-flame	18,000 / 18,000	18,000 / 18,000
Technical Details		
Circuit breaker	15 A	15 A
Volts	120 V	120 V
Frequency	60 Hz	60 Hz
Plug type	3 prong	3 prong
Power cord length	60"	60"
Energy source	Natural gas (factory set)	Natural gas (factory set)
Convertible to LP (kit required)	Yes	Yes
Dimensions & Weight		
Overall appliance dimensions (HxWxD)	7 1/2" x 29 15/16" x 26 5/8"	7 1/2" x 35 15/16" x 26 5/8"
Required cutout size (HxWxD)	7 3/8" x 30" x 24"	7 3/8" x 36" x 24"
Minimum distance from side wall	20"*	20"*
Net weight	31 lbs	34.5 lbs
Accessories – Included		
Included	LP conversion kit, OptiSim® cap	LP conversion kit, OptiSim® cap

*If one side has a minimum distance of 28" (711 mm) to the wall, the other distance can be minimum 12" (305 mm) to the wall.

Optional Accessories

HEZ9GR41UC
Griddle

HEZ9GW23UC
Wok Ring

HEZ7YZ30UC
9" Backguard (Stainless Steel)

HEZ7YZ36UC
9" Backguard (Stainless Steel)

800 Series Gas Rangetops

30" Rangetop and Cutout Dimensions
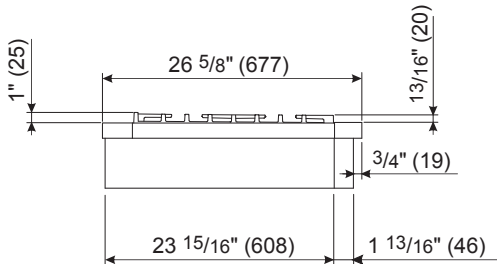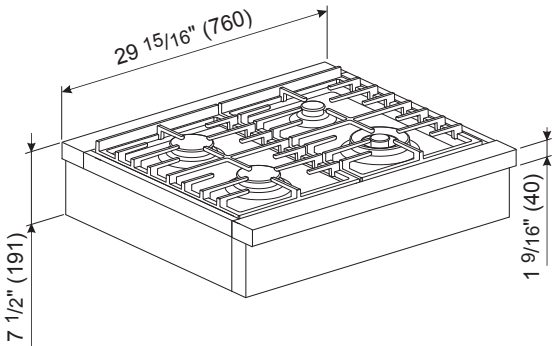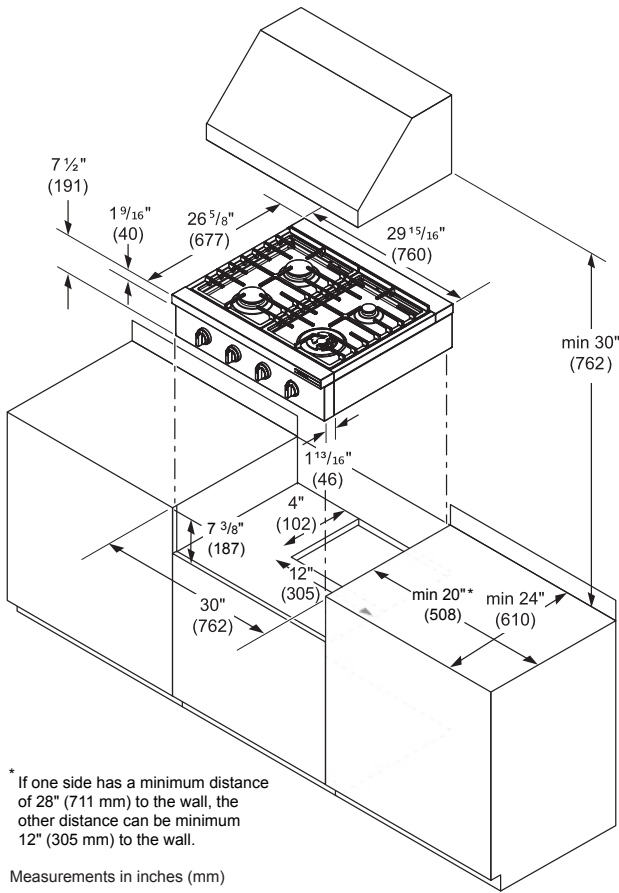
29 15/16" (760)
7 1/2" (191)
1 9/16" (40)
1" (25)
26 5/8" (677)
13/16" (20)
3/4" (19)
23 15/16" (608)
1 13/16" (46)

Measurements in inches (mm)

36" Rangetop and Cutout Dimensions
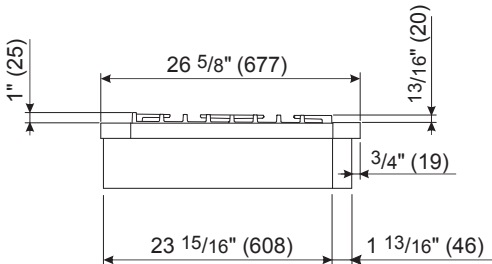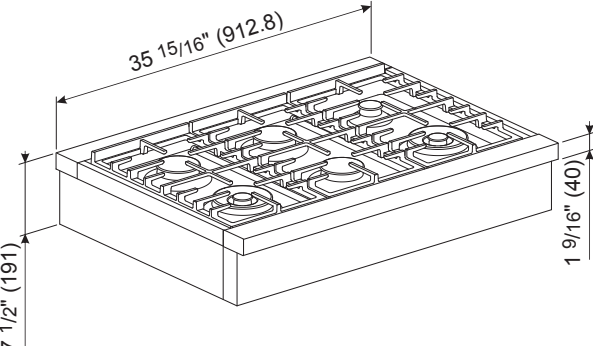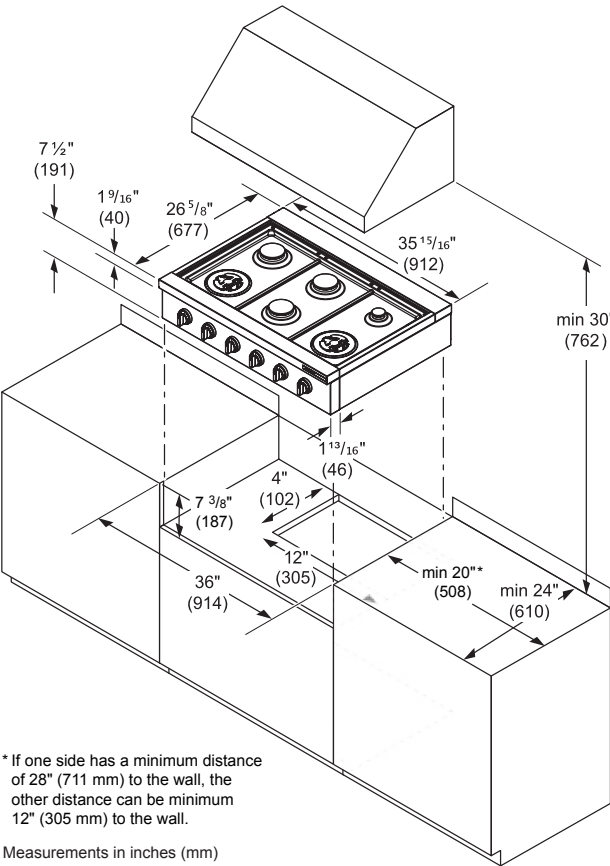
35 15/16" (912.8)
7 1/2" (191)
1 9/16" (40)
1" (25)
26 5/8" (677)
13/16" (20)
3/4" (19)
23 15/16" (608)
1 13/16" (46)

Measurements in inches (mm)

7 ½" (191)
1 9/16" (40)
26 5/8" (677)
29 15/16" (760)
min 30" (762)
1 13/16" (46)
7 3/8" (187)
4" (102)
12" (305)
30" (762)
min 20"* (508)
min 24" (610)

* If one side has a minimum distance of 28" (711 mm) to the wall, the other distance can be minimum 12" (305 mm) to the wall.

Measurements in inches (mm)

7 ½" (191)
1 9/16" (40)
26 5/8" (677)
35 15/16" (912)
min 30" (762)
1 13/16" (46)
7 3/8" (187)
4" (102)
12" (305)
36" (914)
min 20"* (508)
min 24" (610)

* If one side has a minimum distance of 28" (711 mm) to the wall, the other distance can be minimum 12" (305 mm) to the wall.

Measurements in inches (mm)

1–800–944–2904 | bosch-home.com/us

Built-in Wall Ovens

Bosch ovens are designed to beautifully enhance any kitchen. Whether cooking a quiche for two or preparing a roast for twelve, our ovens are engineered with innovative technologies that perform flawlessly, day in and day out. Bosch ovens let you cook with creativity and ease, with features like QuietClose® doors that never slam shut after a hectic day. Genuine European Convection provides even baking on all three racks. With an understated, built-in look that makes a timeless statement, the Bosch oven complements your taste in both cooking and design.

500 Series 24" Single Ovens

24" 500 Series
HBE5453UC

- 2.8 cu. ft.
- Genuine European Convection
- Telescopic Extension Rail
- DualClean® System

24" 500 Series
HBE5452UC

- 2.5 cu. ft.
- Genuine European Convection
- **+** EcoClean® System
- **+** Ring Control with TFT Display
- **+** Home Connect™

Home Connect

+ Indicates a step-up feature

	500 Series	500 Series
	24" Stainless Steel – HBE5453UC	24" Stainless Steel – HBE5452UC
General Properties		
Home Connect™ (Wi-Fi enabled)	N/A	Yes
Cooking modes	Bake, Broil Plus, Convection Bake, Convection Broil, Convection Broil Plus, Multi-Rack Genuine European Convection, Pie, Warm, Defrost, Frozen Foods	Convection Multi-Rack, Bake, Pizza, Roast, Proof, Convection Broil, Broil, Slow Cooking, Defrost, Plate Warming, Warming
Cleaning type	DualClean® System (uses the cavity coating and heat to burn off most grease)	EcoClean® Coating
Telescopic rack	1	N/A
Illumination type	Halogen	Halogen
Interior lights	2	1
Oven Performance		
Bake / broil element wattages	1,300 / 2,950 W	1,420 / 3,050 W
Convection element wattages	1,700 W	2,300 W
Technical Details		
Watts (W)	3,100 W	3,840 W
Circuit breaker (A)	20 A	20 A
Volts (V)	240 / 208 V	240 / 208 V
Frequency (Hz)	60 Hz	60 Hz
Power cord length (in)	47 1/4"	60"
Plug type	Fixed connection, no plug	Fixed connection, no plug
Energy source	Electric	Electric
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	23 5/16" x 23 1/2" x 22 1/2"	23 7/16" x 23 7/16" x 22 13/16"
Required cutout size – standard (HxWxD) (in)	22 15/16" – 23 1/16" x 21 15/16" x 22 1/16"	23 1/16" x 22 1/8" x 23 1/2"
Required cutout size – flush (HxWxD) (in)	23 9/16" x 23 3/4" x 22 15/16"	23 5/8" x 23 3/4" x 23 5/8"
Oven cavity size (cu. ft.)	2.8 cu. ft.	2.5 cu. ft.
Overall oven interior dimensions (HxWxD) (in)	15 5/16" x 18 1/4" x 17 5/8"	14 1/2" x 18 7/8" x 17 3/8"
Usable oven interior dimensions (HxWxD) (in)	14" x 17 1/2" x 16 5/16"	11 1/2" x 15 1/2" x 15 5/8"
Net weight (lbs)	87 lbs	83 lbs
Accessories – Included		
Included	1 Standard rack, 1 telescopic extension rail, 1 enamel baking pan	3 Standard oven racks

500 Series 24" Single Ovens

HBE5453UC Single Wall Oven

measurements in inches (mm)

HBE5452UC Single Wall Oven


Measurements in inches (mm)

HBE5453UC Single Oven Under-Counter Installation

* Includes 3/4" (19 mm) base plate.
** For single ovens installed under a counter top, the junction box may be located to the left, or the right of the unit, within reach of the power conduit.
*** This part of furniture must be present, straight and have no gap with the lateral parts. The minimum height is 3/8" (9 mm).

measurements in inches (mm)

HBE5452UC Single Oven Under-Counter Installation

** For single ovens installed under a countertop, the junction box may be located to the left, or the right of the unit within reach of the power conduit.

Measurements in inches (mm)

HBE5453UC Single Oven Wall-Mounted Installation

* For wall installations, the junction box may be located above or below the unit within reach of the power cable.

For ergonomic reasons, it is recommended to install the oven as high as possible.

measurements in inches (mm)

HBE5452UC Single Oven Wall-Mounted Installation

* For wall installations, the junction box may be located above or below the unit within reach of the power conduit.

Measurements in inches (mm)

HBE5453UC Single Wall Oven Flush Installation

Top View   Side View

* Flush installation requires a 3/16" (5mm) high x 21 15/16" (557mm) wide x 22 1/16" (560mm) deep baseplate underneath the unit body.
** Flush installation under the counter requires a top cleats 3/8" (9 mm) high x 21 15/16" (557 mm) wide. This part of furniture must be present, straight and have no gap with the lateral parts.

measurements in inches (mm)

HBE5452UC Single Wall Oven Flush Installation

Top View   Side View

Measurements in inches (mm)

Built-in Wall Ovens — 500 Series 24" Single

500 / 800 Series Single Ovens

30" 500 Series
HBL5351UC

- 4.6 cu. ft.
- Thermal Cooking
- Stainless Steel Knobs

500 Series
30" HBL5451UC
27" HBN5451UC

- 4.6 cu. ft.
  (27" is 3.9 cu. ft.)
- **+** European Convection
- Stainless Steel Knobs

27"

800 Series
30" HBL8453UC
30" HBL8443UC
30" HBL8463UC
27" HBN8451UC

Black Stainless Steel

Black

27"

- 4.6 cu. ft.
  (27" is 3.9 cu. ft.)
- **+** QuietClose® Door
- **+** Fast Preheat™
- **+** Touch Control
- **+** Extension Rack
- **+** Temperature Probe
- **+** Home Connect (30")

Home Connect

+ Indicates a step-up feature

	500 Series	500 Series	800 Series
	30" Stainless Steel – HBL5351UC	30" Stainless Steel – HBL5451UC 27" Stainless Steel – HBN5451UC	30" Stainless Steel – HBL8453UC 30" Black Stainless Steel – HBL8443UC 30" Black – HBL8463UC 27" Stainless Steel – HBN8451UC
General Properties			
Cooking modes	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, Temperature Probe, Fast Preheat
Cleaning type	Self clean	Self clean	Self clean
Telescopic rack	0	0	1
Illumination type	Halogen	30" Halogen / 27" Incandescent	30" Halogen / 27" Incandescent
Interior lights	1	30": 1; 27": 2	2
Oven Performance			
Bake / broil element wattages	2,400 / 3,800 W	2,400 / 3,800 W	2,400 / 3,800 W
Convection element wattages	N/A	2,000 W	2,000 W
Technical Details			
Watts (W)	6,275 W	6,325 W	6,325 W
Circuit breaker (A)	30 A	30 A	30 A
Volts (V)	240 / 208 V	240 / 208 V	240 / 208 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Power cord length (in)	50"	50"	50"
Plug type	Fixed connection, no plug	Fixed connection, no plug	Fixed connection, no plug
Energy source	Electric	Electric	Electric
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	29" x 29 3/4" x 24 1/2"	30": 29" x 29 3/4" x 24 1/2" 27": 29" x 26 3/4" x 24 1/2"	30": 29" x 29 3/4" x 24 1/2" 27": 29" x 26 3/4" x 24 1/2"
Required cutout size – standard (HxWxD) (in)	27" – 28 5/8" x 28 1/2" x 23 1/2"	30": 27" – 28 5/8" x 28 1/2" x 23 1/2" 27": 27" – 28 5/8" x 25 1/2" x 23 1/2"	30": 27" – 28 5/8" x 28 1/2" x 23 1/2" 27": 27" – 28 5/8" x 25 1/2" x 23 1/2"
Required cutout size – flush (HxWxD) (in)	29 1/8" x 30" x 24 1/2"	30": 29 1/8" x 30" x 24 1/2" 27": 29 1/8" x 27" x 24 1/2"	30": 29 1/8" x 30" x 24 1/2" 27": 29 1/8" x 27" x 24 1/2"
Oven cavity size (cu. ft.)	4.6 cu. ft.	30": 4.6 cu. ft.; 27": 3.9 cu. ft.	30": 4.6 cu. ft.; 27": 3.9 cu. ft.
Overall oven interior dimensions (HxWxD) (in)	17 13/16" x 24 1/8" x 18"	30": 17 13/16" x 24 1/8" x 18" 27": 17 13/16" x 21 1/16" x 18"	30": 17 13/16" x 24 1/8" x 18" 27": 17 13/16" x 21 1/16" x 18"
Usable oven interior dimensions (HxWxD) (in)	12 5/16" x 23 1/4" x 15 1/4"	30": 12 5/16" x 23 1/4" x 15 1/4" 27": 12 5/16" x 20 1/4" x 15 1/4"	30": 12 1/4" x 23 1/4" x 15 1/4" 27": 12 5/16" x 20 1/4" x 15 1/4"
Net weight (lbs)	149 lbs	27": 127 lbs; 30": 149 lbs	27": 127 lbs; 30": 149 lbs
Accessories – Included			
Included	2 Standard oven racks	2 Standard oven racks	1 Telescopic and 2 standard oven racks, temperature probe

500 / 800 Series Single Ovens

30" Single Wall Oven
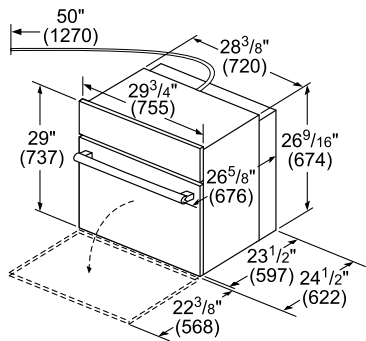
27" Single Wall Oven

Single Wall Oven Flush Installation

Side View

reveal cleats

Measurements in inches (mm)

Optional Accessories for 30" Single Wall Ovens

HEZTR301
30" Telescopic Rack

30" Single Oven Under-Counter Installation

* Includes 3/4" (19) base plate

** For single ovens installed under a countertop, the junction box may be located to the left or right of the unit within reach of the power conduit.
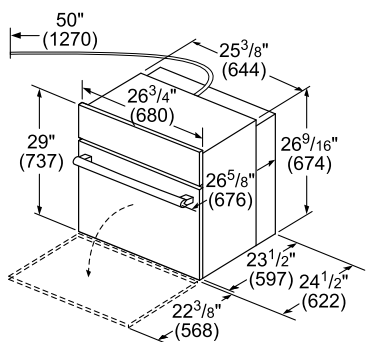
27" Single Oven Under-Counter Installation

* Includes 3/4" (19) base plate

** For single ovens installed under a countertop, the junction box may be located to the left or right of the unit within reach of the power conduit.

30" Single Wall Oven Flush Install

Top View

27" Single Wall Oven Flush Install

Top View

**30" Single Oven Wall-Mounted Installation**

* For single ovens installed into a wall cabinet, the junction box may be located above or beneath the unit within reach of the power conduit.
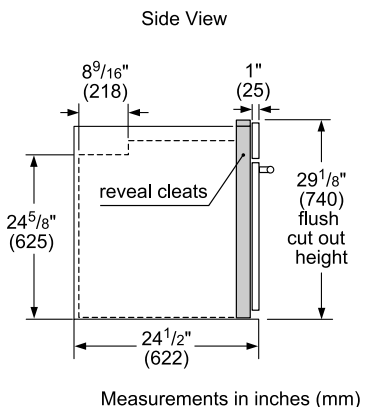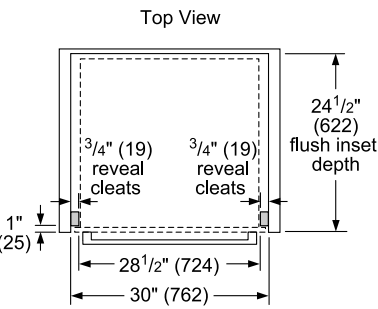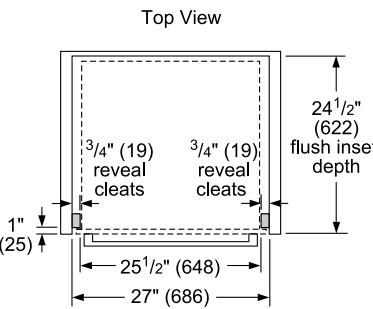
measurements in inches (mm)

27" Single Oven Wall-Mounted Installation

* For single ovens installed into a wall cabinet, the junction box may be located above or beneath the unit within reach of the power conduit.

measurements in inches (mm)

NOTE: Bosch single wall ovens can be installed in combination with other Bosch cooking products. See pages 50–51 for details. Horizontal installation of a 27" oven next to a 27" speed oven with warming drawer is possible, but the speed oven and warming drawer require either two or one cutout with a shelf support in between.

500 / 800 Series Combination Ovens

30" 500 Series
HBL57M52UC

- 120V Microwave Oven (U)
- 4.6 cu. ft. (L)
- European Convection (L)
- Stainless Steel Knobs (L)

30" 800 Series
HBL87M53UC

- 120V Microwave Oven (U)
- 4.6 cu. ft. (L)
+ QuietClose® Door (L)
+ Extension Rack (L)
+ Temperature Probe (L)
+ Home Connect (L)
+ LED Light (U)

Home Connect

30" 800 Series
HBL8753UC
HBL8743UC

- 240V Speed Oven (U)
- 4.6 cu. ft. (L)
+ 12 Auto Programs (U)
+ 1000 W Microwave (U)
- Home Connect (L)

Home Connect
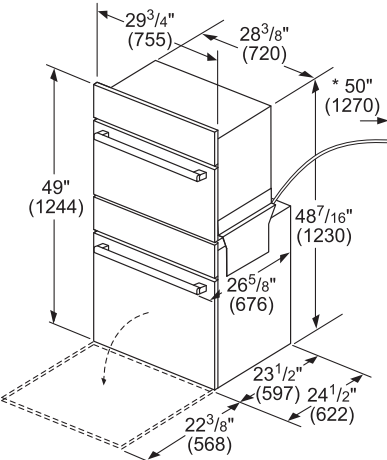
Black Stainless Steel

+ Indicates a step-up feature
U=Upper; L=Lower

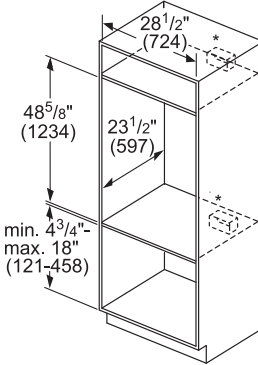|	500 Series	800 Series	800 Series
	Stainless Steel – HBL57M52UC	Stainless Steel – HBL87M53UC	Stainless Steel – HBL8753UC Black Stainless Steel – HBL8743UC
General Properties			
Cooking modes – upper cavity	Microwave; 10 Sensor Cooking Programs (Including Baked Potato, Sweet Potato, Fresh Vegetable, Frozen Vegetable, Ground Meat, Fish/Seafood, Brown Rice, White Rice, Frozen Entrées, Reheat), Popcorn, Beverage, Melt/Soften, Defrost	Microwave; 10 Sensor Cooking Programs (Including Baked Potato, Sweet Potato, Fresh Vegetable, Frozen Vegetable, Ground Meat, Fish/Seafood, Brown Rice, White Rice, Frozen Entrées, Reheat), Popcorn, Beverage, Melt/Soften, Defrost	Speed Oven; 12 Auto Programs (Including Auto Defrost, Melt Butter, Soften Ice Cream, Pizza), 9 Sensor Cook Programs, 9 SpeedChef® Programs, Hi & Lo Broil, European Convection, Keep Warm, Frozen Foods
Cooking modes – lower cavity	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, Temperature Probe, Fast Preheat	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, Temperature Probe, Fast Preheat
Cleaning type – lower cavity	Self clean	Self clean	Self clean
Telescopic rack	0	1	1
Illumination type	LED (Upper) / Halogen (Lower)	LED (upper) / Halogen (lower)	LED (upper) / Halogen (lower)
Interior lights – upper / lower cavity	1 / 1	1 / 2	1 / 2
Oven Performance			
Microwave power – upper cavity	950 W	950 W	1000 W
Bake / broil element wattages – upper	N/A	N/A	600 / 1,750 W
Convection element wattages – upper	N/A	N/A	1,700 W
Bake / broil element wattages – lower	2,400 / 3,800 W	2,400 / 3,800 W	2,400 / 3,800 W
Convection element wattages – lower	2,000 W	2,000 W	2,000 W
Technical Details			
Watts (W)	9,600 W	9,600 W	9,600 W
Circuit breaker (A)	40 A	40 A	40 A
Volts (V); Frequency (Hz)	240 / 208 V; 60 Hz	240 / 208 V; 60 Hz	240 / 208 V; 60 Hz
Power cord length (in)	50"	50"	50"
Plug type	Fixed connection, no plug	Fixed connection, no plug	Fixed connection, no plug
Energy source	Electric	Electric	Electric
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	49" x 29 3/4" x 24 1/2"	49" x 29 3/4" x 24 1/2"	49" x 29 3/4" x 24 1/2"
Required cutout size – standard (HxWxD) (in)	48 5/8" x 28 1/2" x 23 1/2"	48 5/8" x 28 1/2" x 23 1/2"	48 5/8" x 28 1/2" x 23 1/2"
Required cutout size – flush (HxWxD) (in)	49 1/8" x 30" x 24 1/2"	49 1/8" x 30" x 24 1/2"	49 1/8" x 30" x 24 1/2"
Overall upper oven interior (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"	9 7/8" x 16 1/2" x 16 1/2"	9 7/8" x 16 1/2" x 16 1/2"
Turntable – glass max. cookware – upper	14 1/8" dia.	14 1/8" dia.	N/A
Turntable – metal max. cookware – upper	N/A	N/A	14 1/8" dia.
Turntable – ceramic tray max. – upper	N/A	N/A	13 3/4" dia.
Rack – rectangular cookware max. – upper	N/A	N/A	15" x 12"
Oven cavity size – upper / lower cavity (cu. ft.)	1.6 / 4.6 cu. ft.	1.6 / 4.6 cu. ft.	1.6 / 4.6 cu. ft.
Overall lower oven interior (HxWxD) (in)	17 13/16" x 24 1/8" x 18"	17 13/16" x 24 1/8" x 18"	17 13/16" x 24 1/8" x 18"
Usable lower oven interior (HxWxD) (in)	12 5/16" x 23 1/4" x 15 1/4"	12 1/4" x 23 1/4" x 15 1/4"	12 1/4" x 23 1/4" x 15 1/4"
Net weight (lbs)	259 lbs	259 lbs	259 lbs

500 / 800 Series Combination Ovens

Product Dimensions

29 3/4" (755)
28 3/8" (720)
* 50" (1270)
49" (1244)
48 7/16" (1230)
26 5/8" (676)
23 1/2" (597)
24 1/2" (622)
22 3/8" (568)

* Power cable 50" (1270 mm) from the lower oven.

Cutout Dimensions

28 1/2" (724)
48 5/8" (1234)
23 1/2" (597)
min. 4 3/4" – max. 18" (121–458)
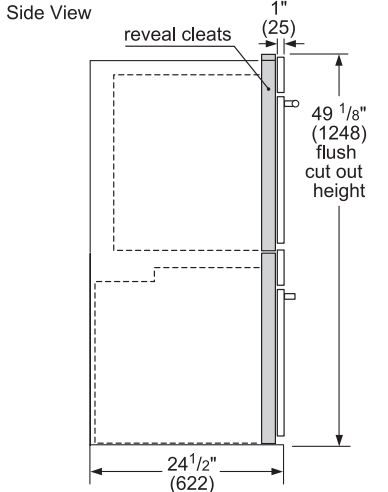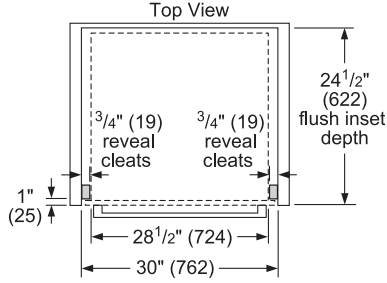
* Junction box may be installed above, below, or to the left or right of the unit within reach of the power cable

measurements in inches (mm)

Flush Installation

Top View
3/4" (19) reveal cleats
3/4" (19) reveal cleats
24 1/2" (622) flush inset depth
1" (25)
28 1/2" (724)
30" (762)

Side View
reveal cleats
1" (25)
49 1/8" (1248) flush cut out height
24 1/2" (622)

measurements in inches (mm)

NOTE: Bosch combination wall ovens can be installed in combination with other Bosch cooking products. See page 53 for details.

	500 Series	800 Series	800 Series
	Stainless Steel – HBL57M52UC	Stainless Steel – HBL87M53UC	Stainless Steel – HBL8753UC Black Stainless Steel – HBL8743UC
Accessories – Included			
Included	Upper oven: metal turntable, square rack, ceramic cooking tray; Lower oven: 2 standard oven racks	Upper Oven: glass turntable Lower Oven: 1 telescopic and 2 standard oven racks, temperature probe	Upper oven: metal turntable, square rack, ceramic cooking tray; Lower oven: 1 telescopic and 2 standard oven racks, temperature probe

Optional Accessories

HEZTR301
30" Telescopic Rack – for use in lower oven in the speed, steam, and microwave combination oven

1–800–944–2904 | bosch-home.com/us

500 / 800 Series Double Ovens

30" 500 Series
HBL5551UC

• 4.6 cu. ft.
• Thermal Cooking (U&L)
• Stainless Steel Knobs

500 Series
30" HBL5651UC
27" HBN5651UC

27"

• 4.6 cu. ft.
  (27" is 3.9 cu. ft.)
+ European Convection (U), Thermal Cooking (L)

800 Series
30" HBL8651UC
30" HBL8642UC
30" HBL8661UC
27" HBN8651UC

Black Stainless Steel

Black

27"
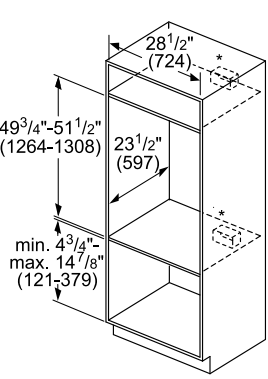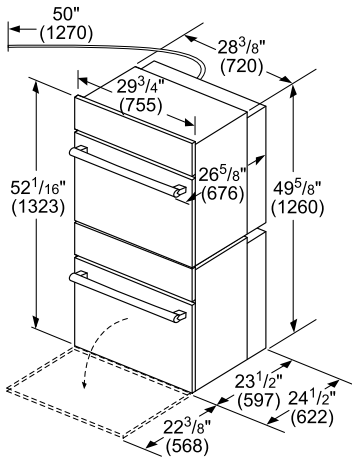
• 4.6 cu. ft.
  (27" is 3.9 cu. ft.)
• European Convection (U), Thermal Cooking (L)
+ QuietClose® Door (U&L)
+ Extension Rack (U)
+ Temperature Probe (U)

+ Indicates a step-up feature
U=Upper; L=Lower

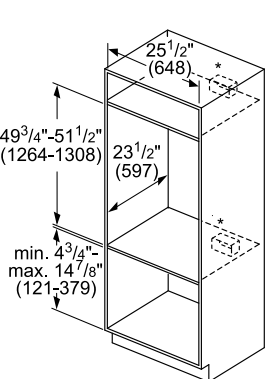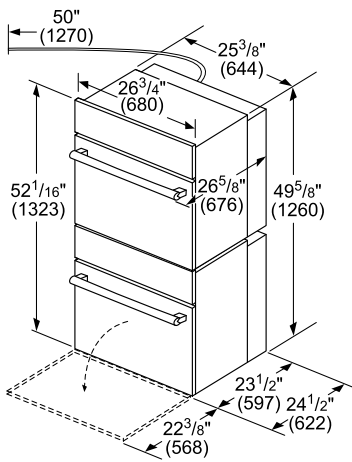|	500 Series	500 Series	800 Series
	30" Stainless Steel – HBL5551UC	30" Stainless Steel – HBL5651UC 27" Stainless Steel – HBN5651UC	30" Stainless Steel – HBL8651UC 30" Black Stainless Steel – HBL8642UC 30" Black – HBL8661UC 27" Stainless Steel – HBN8651UC
General Properties			
Cooking modes – upper cavity	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Pizza, Multi Rack Genuine European Convection, Convection Conversion, Temperature Probe, Fast Preheat
Cooking modes – lower cavity	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath	Bake, Variable Broil (Hi & Low), Roast, Warm, Sabbath
Cleaning type – upper & lower cavity	Self clean	Self clean	Self clean
Telescopic rack	0	0	1
Illumination type – upper & lower cavity	Halogen	30" Halogen / 27" Incandescent	30" Halogen / 27" Incandescent
Interior lights – upper cavity	1	30": 1; 27": 2	2
Interior lights – lower cavity	1	30": 1; 27": 2	30": 1; 27": 2
Oven Performance			
Bake / Broil element wattages – upper & lower cavity	2,400 / 3,800 W	2,400 / 3,800 W	2,400 / 3,800 W
Convection element wattages – upper cavity	N/A	2,000 W	2,000 W
Technical Details			
Watts (W)	7,805 W	30": 8,455 W; 27": 8,535 W	30": 8,495 W; 27": 8,535 W
Volts (V), Frequency (Hz), Circuit breaker (A)	240 / 208 V, 60 Hz, 40 A	240 / 208 V, 60 Hz, 40 A	240 / 208 V, 60 Hz, 40 A
Power cord length (in); Plug type	50"; Fixed connection, no plug	50"; Fixed connection, no plug	50"; Fixed connection, no plug
Energy source	Electric	Electric	Electric
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	52 1/16" x 29 3/4" x 24 1/2"	30": 52 1/16" x 29 3/4" x 24 1/2" 27": 52 1/16" x 26 3/4" x 24 1/2"	30": 52 1/16" x 29 3/4" x 24 1/2" 27": 52 1/16" x 26 3/4" x 24 1/2"
Required cutout size – standard (HxWxD) (in)	49 3/4" – 51 1/2" x 28 1/2" x 23 1/2"	30": 49 3/4"–51 1/2" x 28 1/2" x 23 1/2" 27": 49 3/4"–51 1/2" x 25 1/2" x 23 1/2"	30": 49 3/4"–51 1/2" x 28 1/2" x 23 1/2" 27": 49 3/4"–51 1/2" x 25 1/2" x 23 1/2"
Required cutout size – flush (HxWxD) (in)	52 3/16" x 30" x 24 1/2"	30": 52 3/16" x 30" x 24 1/2" 27": 52 3/16" x 27" x 24 1/2"	30": 52 3/16" x 30" x 24 1/2" 27": 52 3/16" x 27" x 24 1/2"
Oven cavity size (cu. ft.)	4.6 cu. ft.	30": 4.6 cu. ft.; 27": 3.9 cu. ft.	30": 4.6 cu. ft.; 27": 3.9 cu. ft.
Overall oven interior dimensions (HxWxD) (in)	17 13/16" x 24 1/8" x 18"	30": 17 13/16" x 24 1/8" x 18" 27": 17 13/16" x 21 1/16" x 18"	30": 17 13/16" x 24 1/8" x 18" 27": 17 13/16" x 21 1/16" x 18"
Usable oven interior dimensions (HxWxD) (in)	12 5/16" x 23 1/4" x 15 1/4"	30": 12 5/16" x 23 1/4" x 15 1/4" 27": 12 5/16" x 20 1/4" x 15 1/4"	30": 12 5/16" x 23 1/4" x 15 1/4" 27": 12 5/16" x 20 1/4" x 15 1/4"
Net weight (lbs)	261 lbs	30": 261 lbs; 27": 243 lbs	30": 261 lbs; 27": 243 lbs

500 / 800 Series Double Ovens

30" Double Wall Oven

50" (1270)
28 3/8" (720)
29 3/4" (755)
52 1/16" (1323)
26 5/8" (676)
49 5/8" (1260)
23 1/2" (597) 24 1/2" (622)
22 3/8" (568)

28 1/2" (724)
49 3/4"–51 1/2" (1264–1308)
23 1/2" (597)
min. 4 3/4"– max. 14 7/8" (121–379)

* Junction box may be installed above, below, or to the left or right of the unit within range of the power conduit.

measurements in inches (mm)

27" Double Wall Oven

50" (1270)
25 3/8" (644)
26 3/4" (680)
52 1/16" (1323)
26 5/8" (676)
49 5/8" (1260)
23 1/2" (597) 24 1/2" (622)
22 3/8" (568)

25 1/2" (648)
49 3/4"–51 1/2" (1264–1308)
23 1/2" (597)
min. 4 3/4"– max. 14 7/8" (121–379)

* Junction box may be installed above, below, or to the left or right of the unit within range of the power conduit.

measurements in inches (mm)

30" Double Wall Oven Flush Install

Top View

3/4" (19) reveal cleats   3/4" (19) reveal cleats
24 1/2" (622) flush inset depth
1" (25)
28 1/2" (724)
30" (762)

27" Single Wall Oven Flush Install

Top View

3/4" (19) reveal cleats   3/4" (19) reveal cleats
24 1/2" (622) flush inset depth
1" (25)
25 1/2" (648)
27" (686)

Double Wall Oven Flush Installation

Side View
8 9/16" (218)
1" (25)
52 3/16" (1326) flush cut out height
reveal cleats
47 11/16" (1211)
24 1/2" (622)
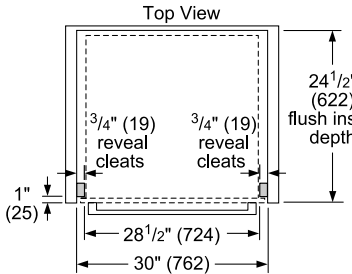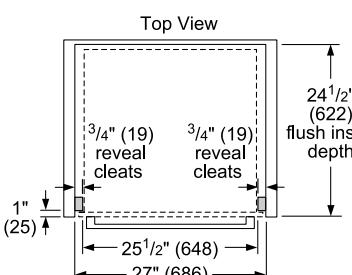
Measurements in inches (mm)

NOTE: Bosch double wall ovens can be installed in combination with other Bosch cooking products. See page 52 for details.
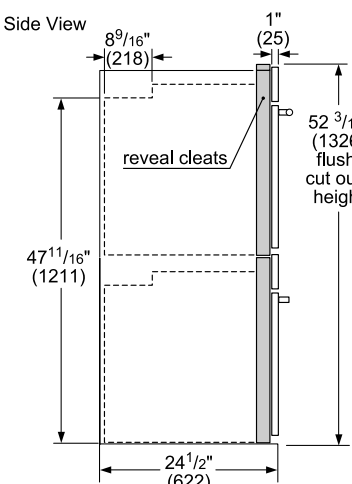
	500 Series	500 Series	800 Series
	30" Stainless Steel – HBL5551UC	30" Stainless Steel – HBL5651UC 27" Stainless Steel – HBN5651UC	30" Stainless Steel – HBL8651UC 30" Black Stainless Steel – HBL8642UC 30" Black – HBL8661UC 27" Stainless Steel – HBN8651UC
Accessories – Included			
	Upper oven: 2 standard oven racks Lower oven: 2 standard oven racks	Upper oven: 2 standard oven racks Lower oven: 2 standard oven racks	Upper oven: 1 telescopic and 2 standard oven racks, temperature probe; Lower oven: 2 standard racks

Optional Accessories for 30" Double Wall Ovens

HEZTR301
30" Telescopic Rack
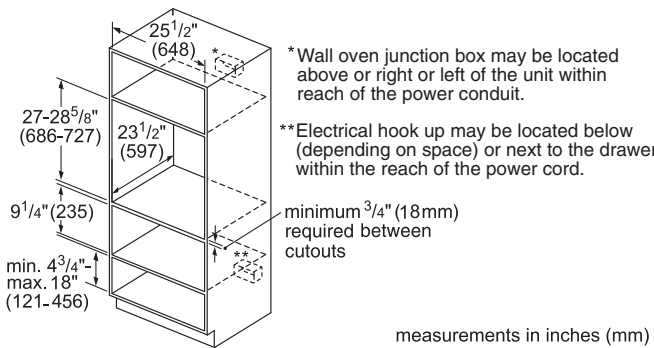
1–800–944–2904 | bosch-home.com/us
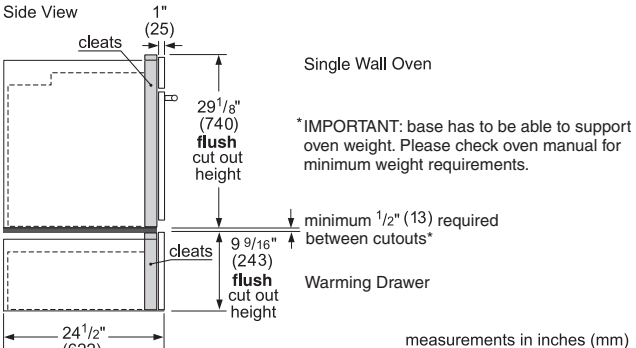
Guide to Installing Bosch Wall Ovens with Other Products

500 / 800 Series 30" Single Wall Ovens

Installed in combination with other products.
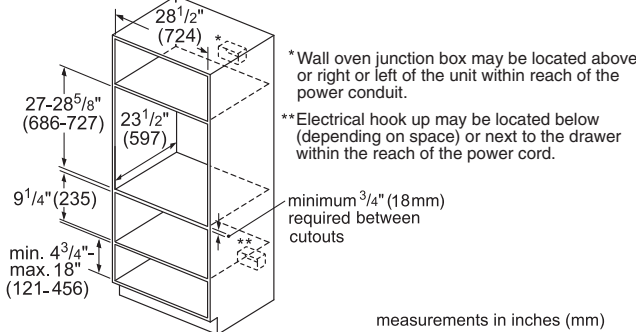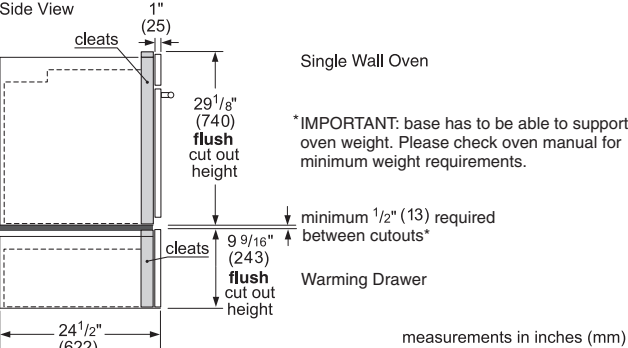
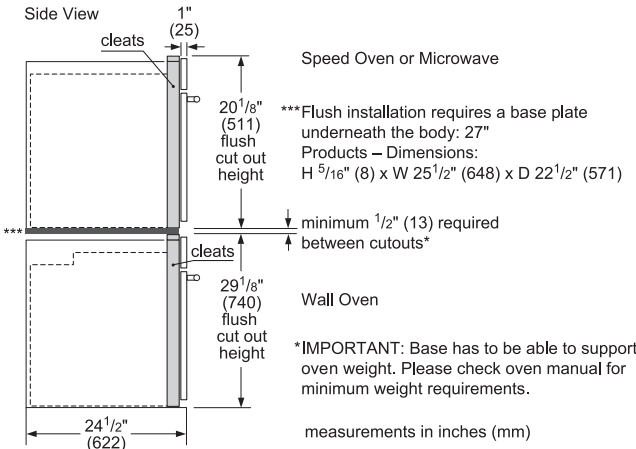**Standard Installation**
30" Single Oven over Storage or Warming Drawer

28 1/2" (724)
27-28 5/8" (686–727)
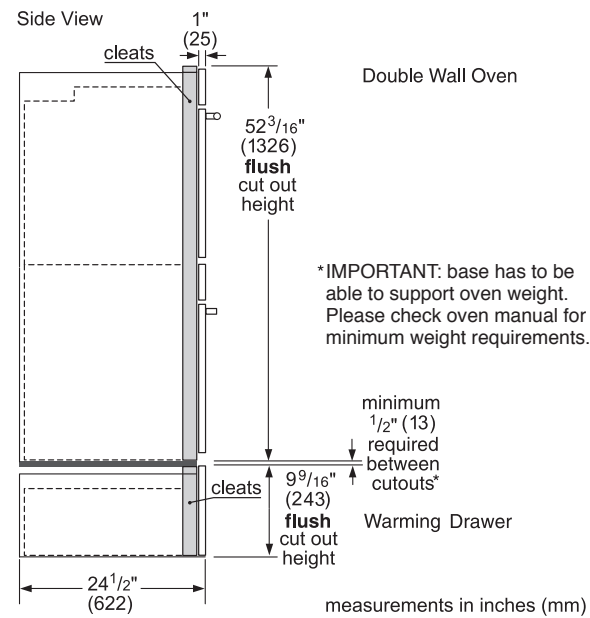23 1/2" (597)
9 1/4" (235)
min. 4 3/4"– max. 18" (121–456)

*Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.

**Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

minimum 3/4" (18mm) required between cutouts

measurements in inches (mm)

Flush Installation
Single Oven over Storage or Warming Drawer

Side View
1" (25)
cleats

Single Wall Oven

29 1/8" (740) **flush** cut out height

*IMPORTANT: base has to be able to support oven weight. Please check oven manual for minimum weight requirements.

minimum 1/2" (13) required between cutouts*
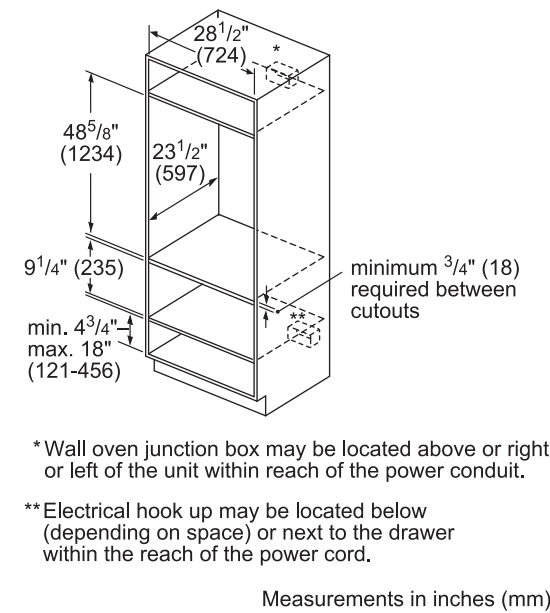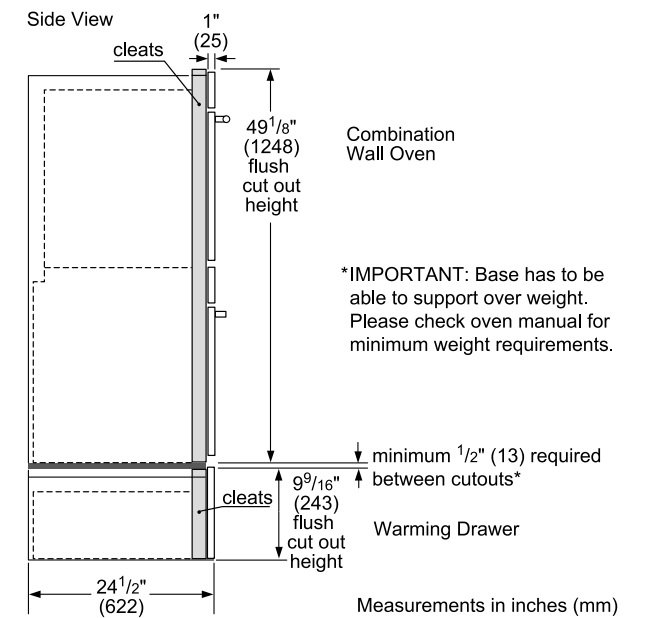
cleats
9 9/16" (243) **flush** cut out height

Warming Drawer

24 1/2" (622)

measurements in inches (mm)
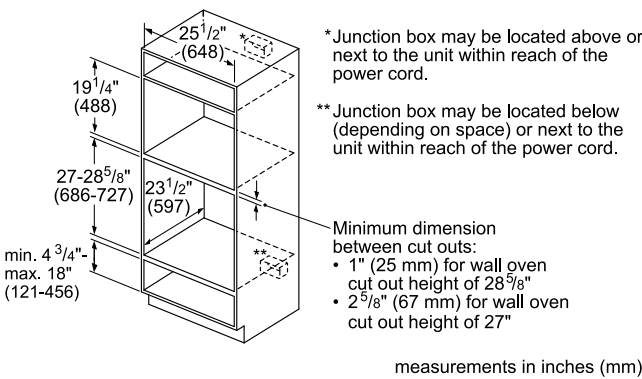
Standard Installation
30" Speed Oven or Microwave over Single Oven***

28 1/2" (724)
19 1/4" (488)
27-28 5/8" (686–727)
23 1/2" (597)
min. 4 3/4"– max. 18" (121–456)

*Junction box may be located above or next to the unit within reach of the power cord.

**Junction box may be located below (depending on space) or next to the unit within reach of the power cord.

***Most combinations available as combo oven (one cut out, one electrical hook up).

Minimum dimension between cut outs:
• 1" (25 mm) for wall oven cut out height of 28 5/8"
• 2 5/8" (67 mm) for wall oven cut out height of 27"

NOTE: This configuration is available as a combo oven (one cut out, one electrical hook up) – HBL57M52UC (500 series), HBL8753U, HBL8743U and HBL87M53UC (800 series)

Flush Installation
Speed Oven or Microwave over 30" Single Oven**

Side View
1" (25)
cleats

Speed Oven or Microwave

20 1/8" (511) **flush** cut out height

***Flush installation requires a base plate underneath the body: 30" Products – Dimensions: H 5/16" (8) x W 28 1/2" (724) x D 22 1/2" (571)

minimum 1/2" (13) required between cutouts*

cleats
29 1/8" (740) **flush** cut out height

Wall Oven

*IMPORTANT: Base has to be able to support oven weight. Please check oven manual for minimum weight requirements.

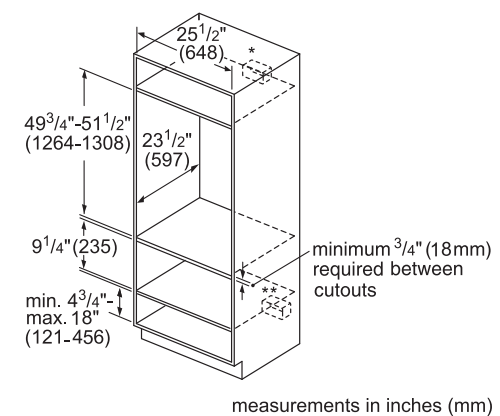**Most combinations available as combo oven (one cut out, one electrical hook up).

24 1/2" (622)

NOTE: This configuration available as a combo oven. See Note at left for details.

500 / 800 Series 27" Single Wall Ovens

Installed in combination with other products.

Standard Installation
27" Single Oven over Warming Drawer

25 1/2" (648)
27-28 5/8" (686–727)
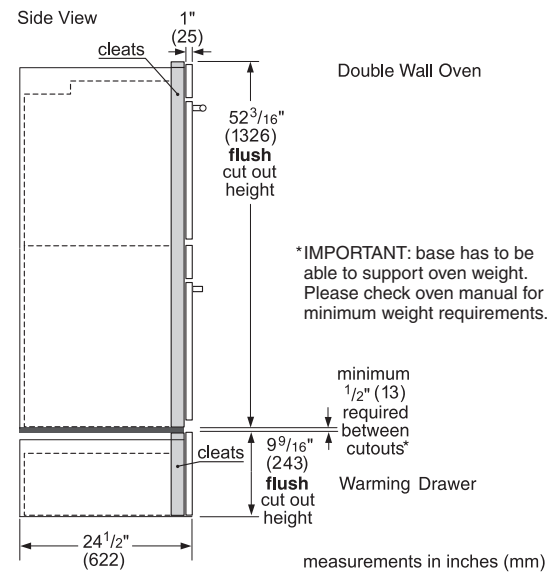23 1/2" (597)
9 1/4" (235)
min. 4 3/4"– max. 18" (121–456)

*Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.

**Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

minimum 3/4" (18mm) required between cutouts

measurements in inches (mm)

Flush Installation
Single Oven over Warming Drawer

Side View
1" (25)
cleats

Single Wall Oven

29 1/8" (740) **flush** cut out height

*IMPORTANT: base has to be able to support oven weight. Please check oven manual for minimum weight requirements.

minimum 1/2" (13) required between cutouts*

cleats
9 9/16" (243) **flush** cut out height

Warming Drawer

24 1/2" (622)

measurements in inches (mm)

Standard Installation
27" Speed Oven or Microwave over Single Oven

25 1/2" (648)
19 1/4" (488)
27-28 5/8" (686–727)
23 1/2" (597)
min. 4 3/4"– max. 18" (121–456)

*Junction box may be located above or next to the unit within reach of the power cord.

**Junction box may be located below (depending on space) or next to the unit within reach of the power cord.

Minimum dimension between cut outs:
• 1" (25 mm) for wall oven cut out height of 28 5/8"
• 2 5/8" (67 mm) for wall oven cut out height of 27"

measurements in inches (mm)

Flush Installation
Speed Oven or Microwave over 27" Single Oven

Side View
1" (25)
cleats

Speed Oven or Microwave

20 1/8" (511) **flush** cut out height

***Flush installation requires a base plate underneath the body: 27" Products – Dimensions: H 5/16" (8) x W 25 1/2" (648) x D 22 1/2" (571)

minimum 1/2" (13) required between cutouts*

cleats
29 1/8" (740) **flush** cut out height

Wall Oven

*IMPORTANT: Base has to be able to support oven weight. Please check oven manual for minimum weight requirements.

24 1/2" (622)

measurements in inches (mm)

Built-in Wall Ovens — 500 / 800 Series Wall Oven Design Combinations

500 / 800 Series 30" Double Wall Ovens

Installed in combination with other products.

Standard Installation
30" Double Oven over Storage or Warming Drawer

28^1/$_2$" (724)

49^3/$_4$"–51^1/$_2$" (1264–1308) 23^1/$_2$" (597)

9^1/$_4$" (235)

min. 4^3/$_4$" – max. 18" (121–456)

minimum ^{3}/$_4$" (18mm) required between cutouts

measurements in inches (mm)

*Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.

**Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

Flush Installation
Double Oven over Storage or Warming Drawer

Side View

1" (25)

cleats

Double Wall Oven

52^3/$_{16}$" (1326) **flush** cut out height

*IMPORTANT: base has to be able to support oven weight. Please check oven manual for minimum weight requirements.

minimum ^{1}/$_2$" (13) required between cutouts*

cleats

9^9/$_{16}$" (243) **flush** cut out height

Warming Drawer

24^1/$_2$" (622)

measurements in inches (mm)

500 / 800 Series 27" Double Wall Ovens

Installed in combination with other products.

Standard Installation
27" Double Oven over Warming Drawer

25^1/$_2$" (648)

49^3/$_4$"–51^1/$_2$" (1264–1308) 23^1/$_2$" (597)

9^1/$_4$" (235)

min. 4^3/$_4$" – max. 18" (121–456)

minimum ^{3}/$_4$" (18mm) required between cutouts

measurements in inches (mm)

*Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.

**Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

Flush Installation
Double Oven over Warming Drawer

Side View

1" (25)

cleats

Double Wall Oven

52^3/$_{16}$" (1326) **flush** cut out height

*IMPORTANT: base has to be able to support oven weight. Please check oven manual for minimum weight requirements.

minimum ^{1}/$_2$" (13) required between cutouts*

cleats

9^9/$_{16}$" (243) **flush** cut out height

Warming Drawer

24^1/$_2$" (622)

measurements in inches (mm)

500 / 800 Speed Combination Ovens

Installed in combination with other products.

Standard Installation
Combination Oven over Storage or Warming Drawer

28^1/$_2$" (724)

48^5/$_8$" (1234) 23^1/$_2$" (597)

9^1/$_4$" (235)

min. 4^3/$_4$" – max. 18" (121–456)

minimum ^{3}/$_4$" (18) required between cutouts

*Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.

**Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

Measurements in inches (mm)

Flush Installation
Combination Oven over Storage or Warming Drawer

Side View

1" (25)

cleats

Combination Wall Oven

49^1/$_8$" (1248) **flush** cut out height

*IMPORTANT: Base has to be able to support over weight. Please check oven manual for minimum weight requirements.

minimum ^{1}/$_2$" (13) required between cutouts*

cleats

9^9/$_{16}$" (243) **flush** cut out height

Warming Drawer

24^1/$_2$" (622)

Measurements in inches (mm)

Bosch Cooktop Over Built-In Oven Approved Combination Guide

The following **Ovens, Cooktops and Drawers** are approved to be installed in combination and the installation has been certified by CSA.

Built-in ovens		Cooktops		
Conventional ovens (1)	**Steam ovens**	**Induction**	**Electric**	**Gas (1) ***
HBL5351UC	HSLP451UC	NIT5068UC	NET8068UC	NGM8046UC
HBL5451UC		NIT5668UC, NIT5469UC	NET8068SUC	NGM5656UC
HBL8443UC		NIT8068UC, NIT8068SUC	NET8668UC	NGMP656UC
HBL8453UC		NIT8668UC, NIT8668SUC	NET8668SUC	NGM8656UC
HBL8451UC		NITP068UC, NITP068SUC	NETP068UC	NGM8646UC
HBL8463UC		NITP668UC, NITP668SUC	NETP668UC	NGM5656UC
HBL8461UC		NIT8069UC, NIT8069SUC	NEM5066UC	NGMP056UC
HBL8442UC		NIT8669UC, NIT8669SUC	NEM5666UC	NGM8056UC
HBLP451UC		NITP069UC, NITP069SUC		**Gas (2) ***
HBLP451LUC		NITP669UC, NITP669SUC		NGM5456UC
HBLP451RUC				**Gas (3) ***
HBN5451UC				NGMP077UC
Conventional ovens (2)				NGMP677UC
HBE5451UC				NGM8657UC
Conventional ovens (3)				NGM8057UC
HBE5452UC				

The following **Ovens, Cooktops and Drawers** are approved by BSH Home Appliances Corporation to be installed in combination.
These products, identified in the table below, may be installed in combination.
The suitability of the combination has not been evaluated by CSA.

Built-in ovens		Cooktops		
Conventional ovens (2)	**Speed oven (1)**	**Induction (1)**	**Electric (1)**	**Gas (1) ***
HBE5453UC	HMCP0252UC	NIT5068UC	NET8068UC	NGM8046UC
Built-In microwave	HMC80242UC	NIT5668UC, NIT5469UC	NET8068SUC	NGM5656UC
HMB57152UC	HMC80252UC	NIT8068UC, NIT8068SUC	NET8668UC	NGMP656UC
HMB50162UC	HMC87152UC	NIT8668UC, NIT8668SUC	NET8668SUC	NGM8656UC
HMB50152UC	HMC80152UC	NITP068UC, NITP068SUC	NETP068UC	NGM8646UC
Storage drawer	**Speed oven (2)**	NITP668UC, NITP668SUC	NETP668UC	NGM5656UC
HSD5051UC	HMC54151UC	NIT8069UC, NIT8069SUC	NEM5066UC	NGMP056UC
Drawer microwave	HMC54152UC	NIT8669UC, NIT8669SUC	NEM5666UC	NGM8056UC
HMD8053UC		NITP069UC, NITP069SUC		**Gas (2) ***
HMD8451UC		NITP669UC, NITP669SUC		NGM5456UC
Warming drawers				**Gas (3) ***
HWD5051UC				NGMP077UC
HWD5751UC				NGMP677UC
				NGM8657UC
				NGM8057UC

*Gas cooktops may require a $\frac{3}{8}$" street elbow (not provided) at the regulator outlet for installation above built-in oven.

Cooktops that are not listed above must be approved under local codes and/or by the local authority having jurisdiction.
Please note: For the latest updates to the approved oven/cooktop combination refer to the website listed in your appliance's installation instructions.

Bosch Cooktop Over Built-In Oven Combination Installation

Refer to the product installation guide for all other measurements.

Oven installation requirements							Cooktop installation requirements (wall spacing)	

When installing an oven or oven with a drawer in combination with a cooktop, a minimum distance between the cabinet floor and countertop (B) is required. Reference the table for dimensions. Refer to the oven installation guide for all other measurements.

Oven type	A Inches (mm)	B min. Inches (mm)	C max. Inches (mm)	Gas cooktop (1) min. Inches (mm)	Gas cooktop (2) min. Inches (mm)	Gas cooktop (3) min. Inches (mm)	Electric cooktop	Induction cooktop
Conventional oven (1)	$28\frac{1}{4}$ (718)	$31\frac{1}{4}$ (794)	$4\frac{3}{4}$ (121)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	D: 24 (610) E: 24 (610)	Reference Product Installation Instructions	
Conventional oven (2)	23 (584)	$27\frac{3}{4}$ (705)	$8\frac{1}{4}$ (210)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	D: 24 (610) E: 24 (610)	Reference Product Installation Instructions	
Conventional oven (3)	$23\frac{1}{16}$ (585)	$27\frac{13}{16}$ (707)	$8\frac{3}{16}$ (208)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	D: 24 (610) E: 24 (610)	Reference Product Installation Instructions	
Steam oven	$19\frac{1}{4}$ (488)	$23\frac{3}{8}$ (594)	$12\frac{5}{8}$ (321)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	D: 24 (610) E: 24 (610)	Reference Product Installation Instructions	
Steam oven with 4" storage drawer								
Speed oven (2)	$17\frac{3}{4}$ (450)	$22\frac{1}{2}$ (572)	$13\frac{1}{2}$ (343)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	Reference Product Installation Instructions		
Microwave speed oven (1)	$19\frac{1}{4}$ (488)	24 (609)	12 (306)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	Reference Product Installation Instructions		
Microwave speed oven (1) with warming drawer	$28\frac{1}{4}$ (718)	$31\frac{1}{4}$ (794)	$4\frac{3}{4}$ (121)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	Reference Product Installation Instructions		
Drawer microwave	$14\frac{13}{16}$ (376)	20 (508)	16 (406)	D: 24 (610) E: 24 (610)	D: 3 (76) E: 4 (102)	Reference Product Installation Instructions		

Built-in Wall Ovens — Combination Guide
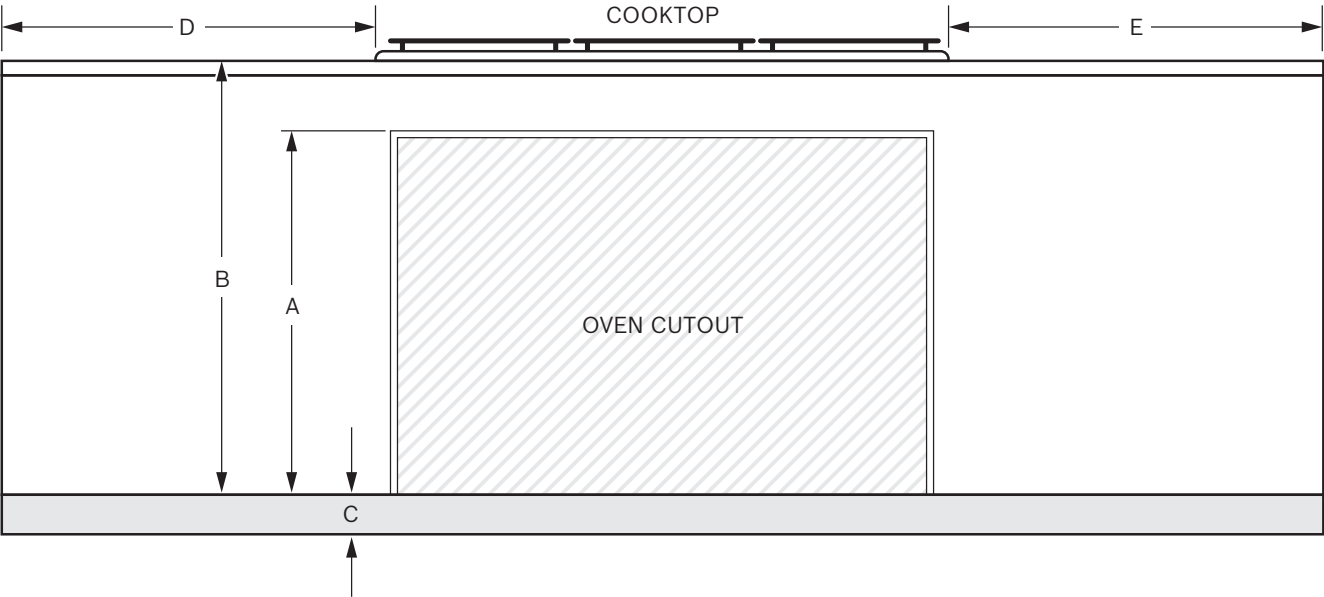
Microwaves, Speed Ovens & Drawers

Bosch microwaves simplify snack and mealtime by making it easier than ever to prepare foods at the touch of a button. Built in, over-the-range, or in a discreet drawer style, Bosch microwaves have automatic sensors to remove the guesswork from cooking and reheating. Our speed ovens combine convection and microwave technology to get meals on the table faster—freeing up more time for other things. The Bosch 27" or 30" speed ovens can be combined with a warming drawer or storage drawer to align horizontally with our single wall oven. With speed, intuitive controls, large capacities, and a clean aesthetic, Bosch microwaves and speed ovens lend a trusted hand in the kitchen when fitting cooking into your busy day.

500 Series 24" Speed Oven

24" 500 Series
HMC54151UC

- 1.6 cu. ft.
- SpeedChef® Cooking Modes Offer Faster Cooking Times
- Installs Flush with Kitchen Cabinetry
- 2-in-1 Microwave and Convection Oven for a Variety of Cooking Options
- 120v, NEMA 5-20 – 3 Prong Plug

NEMA 5-20 Receptacle

500 Series	
24" Stainless Steel – HMC54151UC	
General Properties	
Cavity material	Stainless steel
Max. microwave power (W)	1,000 W
Capacity	
Cavity capacity (cu. ft.)	1.6
Turntable diameter (in.)	14 $3/16$"
Technical Details	
Watts (W)	1,920 W
Circuit breaker (A)	20 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	48"
Plug type	NEMA 5-20 – 3 prong plug
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	17 $7/8$" x 23 $7/16$" x 22 $1/16$"
Required cutout size (HxWxD) (in)	Standard: 17 $3/4$" x 22 $5/16$" x 22" Flush: 18 $7/16$" x 24" x 22 $3/4$"
Oven overall interior dimensions (HxWxD) (in.)	9 $7/8$" x 16 $1/2$" x 16 $1/2$"
Turntable – metal max. cookware	12 $3/4$" dia.
Turntable – ceramic max. cookware	12 $1/2$" dia.
Rack – rectangular cookware max.	15" x 12"
Net weight (lbs)	83 lbs
Accessories – Included	
Included	Metal turntable, cooking rack, ceramic cooking tray

500 Series 24" Speed Oven

Product Dimensions
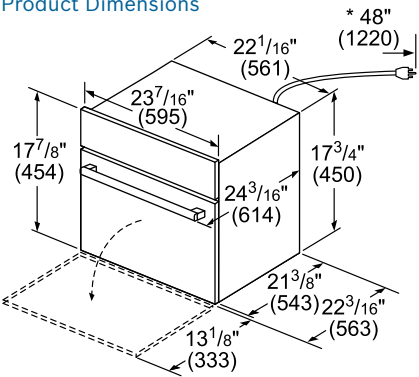
Under-Counter Installation
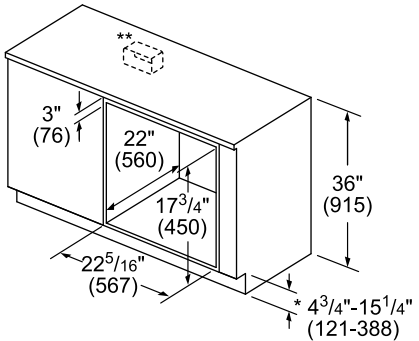
* Includes $3/4$" (19) base plate

** Receptacle may be located to the
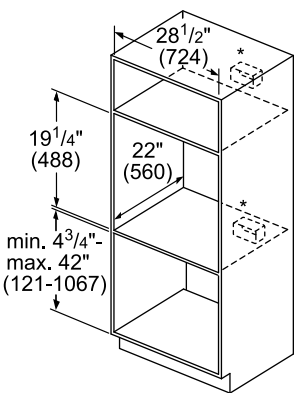left or right of the unit within reach
of the power cord.

Wall Mounted Installation

* Receptacle may be located above or
beneath the unit within reach of the power cord.

Notice:
The cabinet base must be flat and capable of
supporting a weight of at least 142 lbs (64.1 kg).

Example Flush Install

Single wall oven shown.

Flush Installation
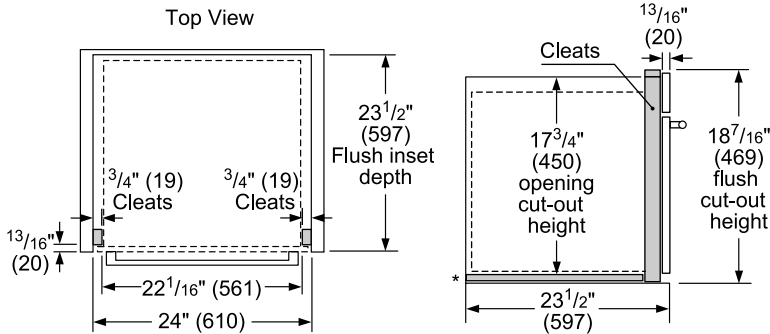
* Baseplate $5/16$" (8)

800 Series Speed Ovens

800 Series
30" – HMC80152UC
27" – HMC87152UC

- 1.6 cu. ft.
- SpeedChef® Cooking Modes Offer Faster Cooking Times
- Installs Flush with Kitchen Cabinetry
- 120v, NEMA 5-20 – 3 Prong Plug

30" 800 Series
HMC80252UC (Stainless Steel)
HMC80242UC (Black Stainless Steel)

- 1.6 cu. ft.
- SpeedChef® Cooking Modes Offer Faster Cooking Times
- Installs Flush with Kitchen Cabinetry
- 240v, Direct Wire

■ Black Stainless Steel

	800 Series	800 Series
	30" Stainless Steel – HMC80152UC 27" Stainless Steel – HMC87152UC	30" Stainless Steel – HMC80252UC 30" Black Stainless Steel – HMC80242UC
General Properties		
Cavity material	Stainless steel	Stainless steel
Max. microwave power (W)	1,000 W	1,000 W
Capacity		
Cavity capacity (cu. ft.)	1.6	1.6
Turntable diameter (in.)	14 1/8"	14 1/8"
Technical Details		
Watts (W)	1,920 W	3,840 W
Circuit breaker (A)	20 A	16 A
Volts (V)	120 V	208 – 240 V
Frequency (Hz)	60 Hz	60 Hz
Power cord length (in)	43"	48"
Plug type	NEMA 5-20 – 3 prong plug	Fixed connection, 8" stripped wires
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	30": 19 5/8" x 29 3/4" x 22 3/8" 27": 19 5/8" x 26 3/4" x 22 3/8"	19 5/8" x 29 3/4" x 22 3/8"
Required cutout size (HxWxD) (in)	30" Standard: 19 1/4" x 28 1/2" x 22" 30" Flush: 20 1/8" x 30" x 23 1/2" 27" Standard: 19 1/4" x 25 1/2" x 22" 27" Flush: 20 1/8" x 27" x 23 1/2"	Standard: 19 1/4" x 28 1/2" x 22" Flush: 20 1/8" x 30" x 23 1/2"
Oven overall interior dimensions (HxWxD) (in.)	9 7/8" x 16 1/2" x 16 1/2"	9 7/8" x 16 1/2" x 16 1/2"
Turntable – metal max. cookware	12 3/4" dia.	12 3/4" dia.
Turntable – ceramic max. cookware	12 1/2" dia.	12 1/2" dia.
Rack – rectangular cookware max.	15" x 12"	15" x 12"
Net weight (lbs)	92 lbs / 87 lbs	92 lbs
Accessories – Included		
Included	Metal turntable, cooking rack, ceramic cooking tray	Metal turntable, cooking rack, ceramic cooking tray

30" Flush Installation

* Flush installation requires a 5/16" (8 mm) high x 28 1/2" (724 mm) wide x 22 1/2" (571 mm) deep baseplate underneath the unit body.

measurements in inches (mm)

27" Flush Installation

measurements in inches (mm)
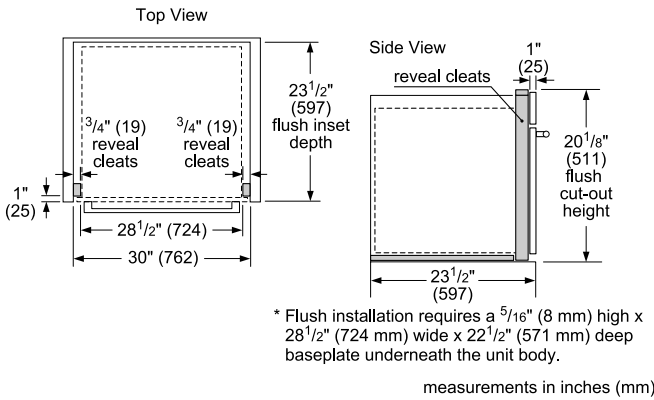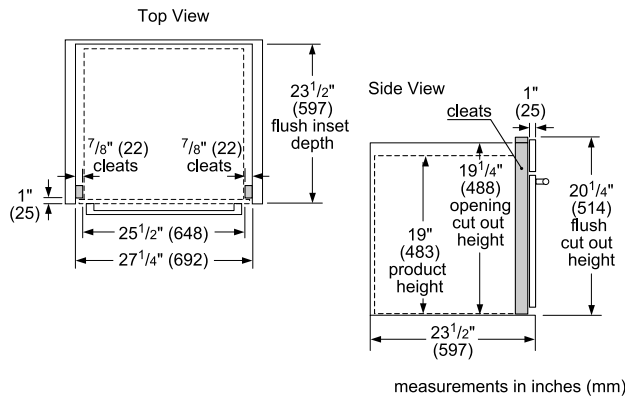
800 Series Speed Ovens

30" Speed Oven Dimensions

* Power cord with plug on 120 V units is 43" (1092)
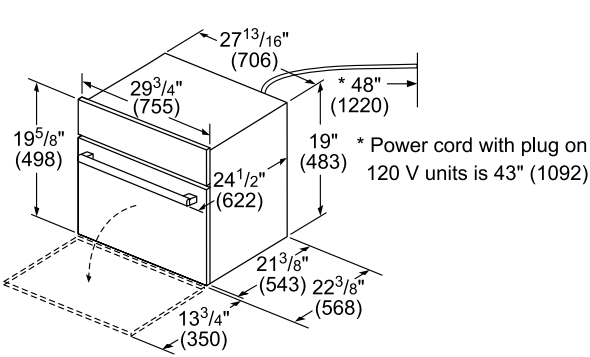
27" Speed Oven Dimensions
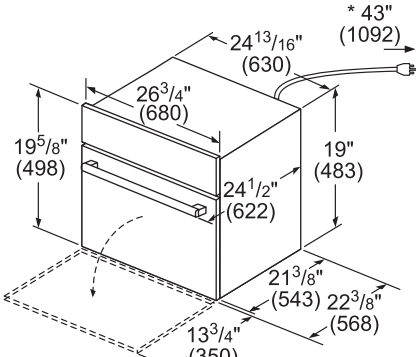
30" Speed Oven Under-Counter
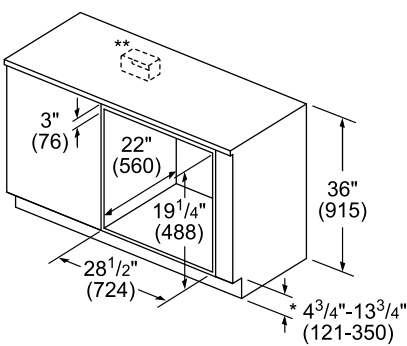
* Includes 3/4" (19) base plate

** Receptacle may be located to the left or right of the unit within reach of the power cord.

27" Speed Oven Under-Counter
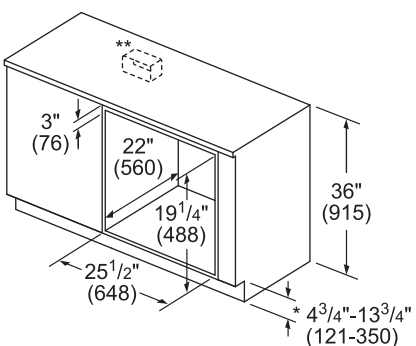
* Includes 3/4" (19) base plate

** Receptacle may be located to the left or right of the unit within reach of the power cable.

30" Speed Oven Wall-Mounted

* Receptacle may be located above or beneath the unit within reach of the power cord.

measurements in inches (mm)

27" Speed Oven Wall-Mounted

30" HMC80152UC
27" HMC87152UC

NEMA 5-20 Receptacle

* Receptacle may be located above or beneath the unit within reach of the power cable.

measurements in inches (mm)

NOTE: Bosch Speed ovens can be installed in combination with other Bosch cooking products. See pages 50–51 for details. Horizontal installation of a 27" oven next to a 27" speed oven with warming drawer is possible, but the speed oven and warming drawer require either two cutouts or one cutout with a shelf support in between.

500 Series Storage and Warming Drawers

30" 500 Series Storage Drawer
HSD5051UC

• 2.4 cu. ft.
• The Storage Drawer Fits 30"
  Racks, the Temperature Probe
  and Other Cooking Relevant
  Utensils
• A Silicone Mat Protects the
  Bottom of Drawer
• Installs Vertically Under Bosch
  Speed, Steam or Wall Oven

500 Series Warming Drawer
30" – HWD5051UC
27" – HWD5751UC

• 2.2 cu. ft. (27" is 1.9 cu. ft.)
+ Warming Drawer
+ 3 Settings, Timer
• 30" Installs Vertically Under
  Bosch Speed, Steam or
  Wall Oven
• 27" Installs Vertically Under
  Bosch 120V Speed, or
  Wall Oven (Separate Cut
  Outs Needed)

+ Indicates a step-up feature

	Storage Drawer	Warming Drawers
	30" Stainless Steel – HSD5051UC	30" Stainless Steel – HWD5051UC 27" Stainless Steel – HWD5751UC
General Properties		
Power levels	N/A	High, low, medium
Dough proofing mode	N/A	Yes
Temperature range	N/A	100° – 190° F
Timer 5 min. – 5 hours	N/A	Yes
Automatic shut off after 1 hour	N/A	Yes
Door opening	Push to open	Push to open
Hinges	Ball bearing hinges	Ball bearing hinges
Wattage heating element	N/A	450 W
Control type	N/A	Illuminated TouchControl
Capacity		
Cavity capacity (cu. ft.)	2.4 cu. ft.	30": 2.2 cu. ft. 27": 1.9 cu. ft.
Technical Details		
Watts (W)	N/A	450 W
Circuit breaker (A)	N/A	15 A
Volts (V)	N/A	120 V
Frequency (Hz)	N/A	60 Hz
Power cord length (in)	N/A	84"
Plug type	N/A	120V – 3 prong
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	9 7/16" x 29 3/4" x 23 1/2"	30": 9 7/16" x 29 3/4" x 23 1/2" 27": 9 7/16" x 26 3/4" x 23 1/2"
Required cutout size (HxWxD) (in)	9 1/4" x 28 1/2" x 23 1/2"	30": 9 1/4" x 28 1/2" x 23 1/2" 27": 9 1/4" x 25 1/2" x 23 1/2"
Net weight (lbs)	47 lbs	30": 55 lbs 27": 50 lbs
Accessories – Included		
Installation brackets	Install drawer below speed or steam oven in one cut out (identical to single wall oven cut out)	30" model: Install drawer below speed or steam oven in one cut out (identical to single wall oven cut out). Products still need to be hooked up individually.
Drawer mat	Rubber mat to protect bottom of drawer	N/A

500 Series Storage and Warming Drawers

30" Storage / Warming Drawer Dimensions
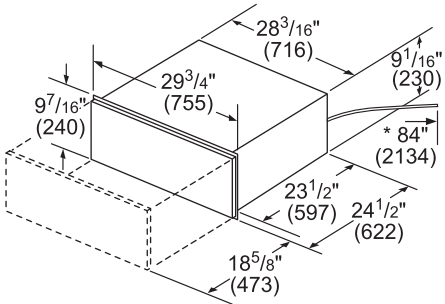
* Power cord on warming drawer
  is 84" (2134 mm)

27" Warming Drawer Dimensions
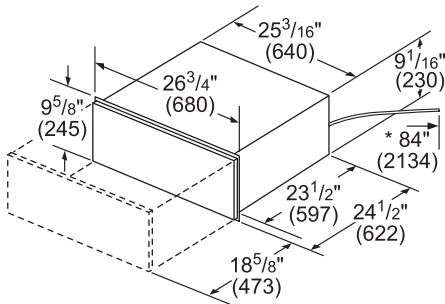
* Power cord on warming drawer
  is 84" (2134 mm)

30" Storage / Warming Drawer Wall-Mounted

measurements in inches (mm)

27" Warming Drawer Wall-Mounted

measurements in inches (mm)

30" Speed Oven Over Storage / Warming Drawer

* For installation into a wall cabinet,
  the receptacle may be installed above, below,
  or to the left or right of the unit within range
  of the power cord.

Speed Oven Over Storage / Warming Drawer

Side View
reveal cleats

Measurements in inches (mm)

30" Flush Installation

Top View

27" Flush Installation

Top View
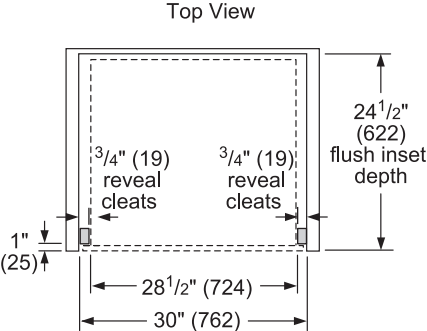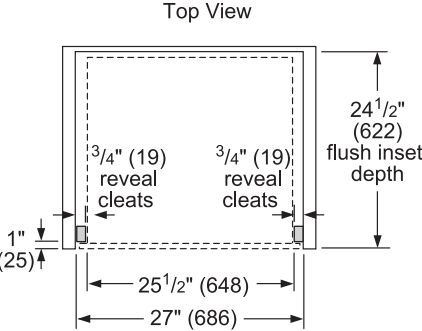
30" & 27" Flush Installation

Side View
reveal cleats

NOTE: See pages 50–53 for planning and installation details when installing Bosch storage and warming drawers in combination with other Bosch products. Horizontal installation of a 27" oven next to a 27" speed oven with warming drawer is possible, but the speed oven and warming drawer require either two cutouts or one cutout with a shelf support in between.

300 / 500 / 800 Series
Over-the-Range Microwaves

300 Series
HMV3053U

- 1.6 cu. ft.
- 1,000 Watts Microwave Cooking
- Auto Cook Functions
- 300 CFM

500 Series
HMV5053U

- +2.1 cu. ft.
- +1,100 Watts Microwave Cooking
- +Sensor Cooking
- +385 CFM

800 Series
HMV8053U (Stainless Steel)
HMV8044U (Black Stainless Steel)

- 1.8 cu. ft.
- 1,000 Watts Microwave Cooking
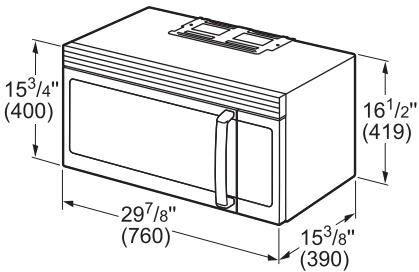- +1,450 Watts Convection Cooking
- +Stainless Steel Cavity

Black Stainless Steel

+Indicates a step-up feature

	30" – 300 Series	30" – 500 Series	30" – 800 Series
	Stainless Steel – HMV3053U	Stainless Steel – HMV5053U	Stainless Steel – HMV8053U Black Stainless Steel – HMV8044U
General Properties			
Cavity color	White	White	Stainless steel
Max. microwave power (W)	1,000 W	1,100 W	1,000 W
Max. extraction rate (CFM)	300 CFM	385 CFM	385 CFM
Ducted	Yes	Yes	Yes
Ductless	Yes	Yes	Yes
Duct size	3 1/4" x 10"	3 1/4" x 10"	3 1/4" x 10"
Capacity			
Cavity capacity (cu. ft.)	1.6 cu. ft.	2.1 cu. ft.	1.8 cu. ft.
Turntable diameter (in.)	13 5/8"	14 3/16"	14 3/16"
Technical Details			
Watts (W)	1,550 W	1,550 W	1,450 W
Circuit breaker (A)	15 A	15 A	15 A
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Power cord length (in)	39"	39"	39"
Plug type	120V – 3 prong	120V – 3 prong	120V – 3 prong
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	15 3/4" x 29 7/8" x 15 3/8"	16 1/2" x 29 7/8" x 15 7/8"	16 1/2" x 29 7/8" x 15 7/8"
Required cutout size (HxWxD) (in)	16 1/2" min x 30" x 12" min – 12 7/8" max	17 1/2" min x 30" x 12" min – 14" max	17 1/2" min x 30" x 12" min – 14" max
Net weight (lbs)	54 lbs	54 lbs	54 lbs
Accessories – Included			
Included	N/A	N/A	Two level cooking rack

300 Series Product Dimensions

15 3/4" (400), 16 1/2" (419), 29 7/8" (760), 15 3/8" (390)

Measurements in inches (mm)

500 / 800 Series Product Dimensions

16 1/2" (419), 17 1/2" (446), 29 7/8" (758), 15 7/8" (402)
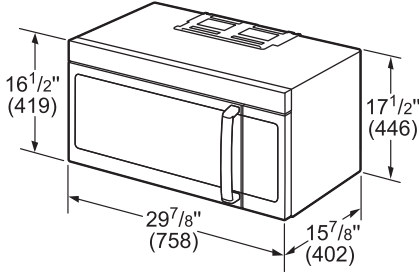
measurements in inches (mm)

300 Series Cutout and Clearances

min. 12 (305) max. 12 7/8" (327); Grounded outlet Inside cabinet above the oven; min. 16 1/2" (419); min. 30" (762) cabinet opening width; min. 66" (1676); min. 30" (762) Clearance from bottom of cabinet to cooking surface of countertop

measurements in inches (mm)

500 / 800 Series Cutout and Clearances

min.12" (305) max.14" (356); Grounded outlet inside cabinet above the oven; min. 17 1/2" (446); min. 30" (762) cabinet opening width; min. 66" (1676); * min. 30" (762)

* For optimal performance and reliability, the manufacturer recommends a clearance of 33"–36", although the permissible clearance must be at least 30".

measurements in inches (mm)

300 / 500 / 800 Series Venting Options

ROOF VENTING

WALL VENTING

ROOM VENTING

800 Series Drawer Microwaves

**24" 800 Series
HMD8451UC**

- 1.2 cu. ft.
- 950 Watts
  Microwave Cooking
- 10 Power Levels
- Flush Installation

**30" 800 Series
HMD8053UC**

- 1.2 cu. ft.
- 950 Watts
  Microwave Cooking
- 10 Power Levels
- Flush Installation

The Flush-Mount Drawer Microwave

Open your design options. The Bosch drawer microwave installs cleanly under counters, cooktops, and flush to cabinets, letting you take advantage of extra space in a kitchen island, for example. The drawer microwave opens and closes with a push of a button and is large enough to fit a 9" x 13" baking oven pan or a 4 qt. casserole dish.

	24" – 800 Series	30" – 800 Series
	Stainless Steel – HMD8451UC	Stainless Steel – HMD8053UC
General Properties		
Cavity material	White	White
Max. microwave power (W)	950 W	950 W
Capacity		
Cavity capacity (cu. ft.)	1.2 cu. ft.	1.2 cu. ft.
Technical Details		
Watts (W)	1,500 W	1,500 W
Circuit breaker (A)	15 A	15 A
Volts (V)	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz
Power cord length (in)	48"	48"
Plug type	120V – 3 prong	120V – 3 prong
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	16 5/16" x 23 7/8" x 23 3/8"	16 5/16" x 30" x 23 3/8"
Required cutout size (HxWxD) (in)	14 13/16" x 22 1/8" x 23 1/2"	14 13/16" x 28 1/4" x 23 1/2"
Net weight (lbs)	81 lbs	82 lbs

800 Series Drawer Microwaves

24" Drawer Microwave Dimensions
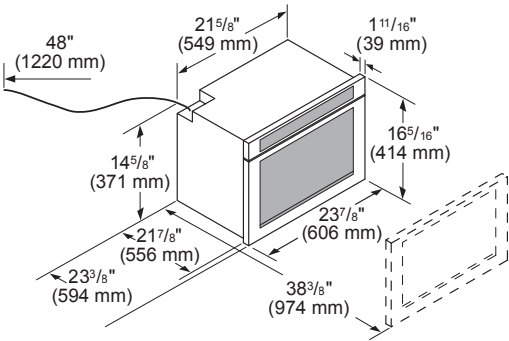
30" Drawer Microwave Dimensions

24" Drawer Microwave Standard Installation

Front view of cut-out

* Recommended location of electrical outlet
** Anti-tip block
*** Base should support up to 100 lbs

30" Drawer Microwave Standard Installation

Frontview cut out

* Suggested location of electrical outlet
** Anti-Tip Block
*** Base should support up to 100 lbs

Measurements in inches (mm)

24" Drawer Microwave Flush Installation

Front view of cut-out

* Recommended location of electrical outlet
** Anti-tip block
*** Base should support up to 100 lbs
**** Sides should be finished and extend back to cleat.
   Cleats should also be finished, as they may be
   visible after installation.

30" Drawer Microwave Flush Installation
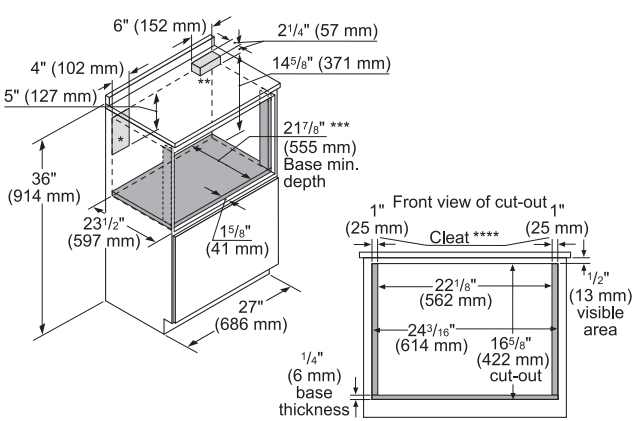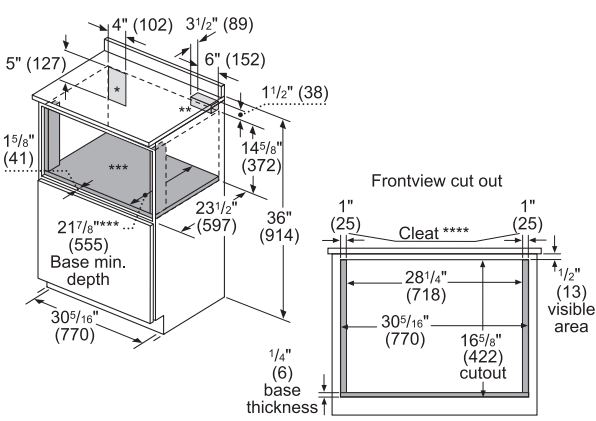
Frontview cut out

* Suggested location of electrical outlet
** Anti-Tip Block
*** Base should support up to 100 lbs
**** Sides should be finished and extend back to cleat.
   Cleats should also be finished, as they may be
   visible after installation.

Measurements in inches (mm)

500 Series Built-in Microwaves

27" 500 Series
HMB57152UC

- 1.6 cu. ft.
- 950 Watts Microwave Cooking
- Automatic Sensor Programs
- Designed to Match Bosch Wall Ovens

30" 500 Series
HMB50152UC (Stainless Steel)
HMB50162UC (Black)

- 1.6 cu. ft.
- 950 Watts Microwave Cooking
- Automatic Sensor Programs
- Designed to Match Bosch Wall Ovens

NOTE: Bosch built-in microwaves can be installed in combination with other Bosch cooking products. See pages 50–51 for details.

	27" – 500 Series	30" – 500 Series
	Stainless Steel – HMB57152UC	Stainless Steel – HMB50152UC Black – HMB50162UC
General Properties		
Cavity color	Stainless steel	Stainless steel
Max. microwave power (W)	950 W	950 W
Capacity		
Cavity capacity (cu. ft.)	1.6 cu. ft.	1.6 cu. ft.
Turntable diameter (in.)	14 $1/8$"	14 $1/8$"
Technical Details		
Watts (W)	1,650 W	1,650 W
Circuit breaker (A)	15 A	15 A
Volts (V)	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz
Power cord length (in)	43"	43"
Plug type	NEMA 5-15 – 3 prong	NEMA 5-15 – 3 prong
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	19 $5/8$" x 26 $3/4$" x 19 $5/8$"	19 $5/8$" x 29 $3/4$" x 19 $5/8$"
Required cutout size (HxWxD) (in)	Standard: 19 $1/4$" x 25 $1/2$" x 19 $1/4$" Flush: 20 $1/4$" x 27" x 20 $3/4$"	Standard: 19 $1/4$" x 28 $1/2$" x 19 $1/4$" Flush: 20 $1/4$" x 30" x 20 $3/4$"
Oven overall interior dimensions (HxWxD) (in.)	9 $7/8$" x 16 $1/2$" x 16 $1/2$"	9 $7/8$" x 16 $1/2$" x 16 $1/2$"
Net weight (lbs)	72 lbs	75 lbs
Accessories – Included		
Included	Glass turntable	Glass turntable

500 Series Built-in Microwaves

27" Microwave Dimensions
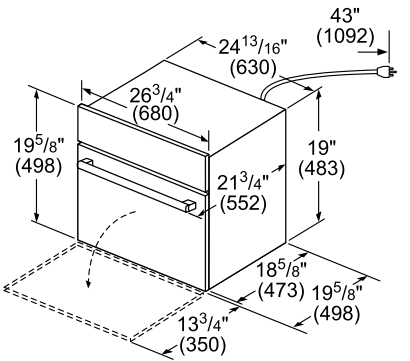
measurements in inches (mm)

30" Microwave Dimensions
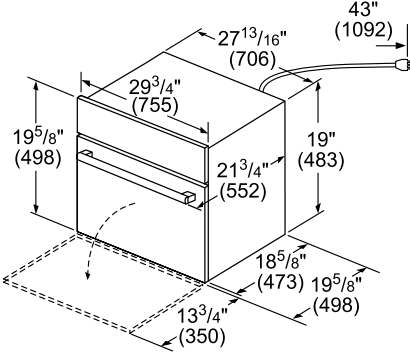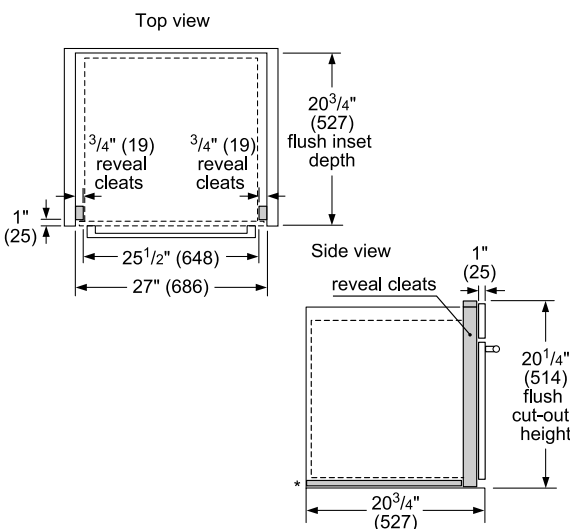

measurements in inches (mm)

27" Microwave Standard Installation
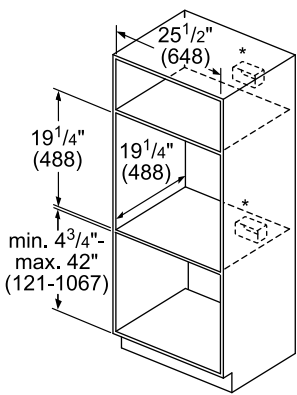
* Receptacle may be located above or beneath the unit within reach of the power cable.
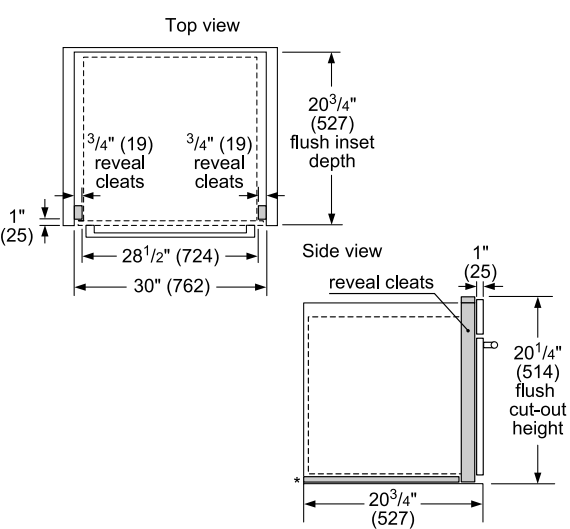
measurements in inches (mm)

30" Microwave Standard Installation
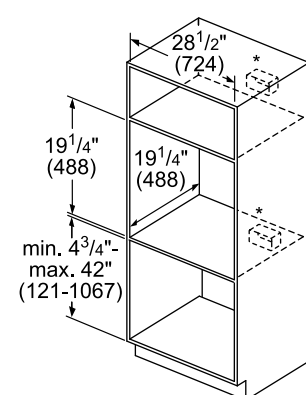
* Receptacle may be located above or beneath the unit within reach of the power cable.

measurements in inches (mm)

27" Microwave Flush Installation

* Flush installation requires a $5/16$" (8 mm) high x 25 $1/2$" (648 mm) wide x 19 $3/4$" (500 mm) deep base plate underneath the unit body.

measurements in inches

30" Microwave Flush Installation

* Flush installation requires a $5/16$" (8 mm) high x 28 $1/2$" (724 mm) wide x 19 $3/4$" (500 mm) deep base plate underneath the unit body.

measurements in inches

Microwaves & Drawers — 500 Series Built-in Microwaves

Built-in Coffee Machine

Bosch has brewed up smart ideas to let you craft the perfect cup quickly and easily. Our built-in coffee machine is stylishly designed with innovative technologies to prepare coffee precisely when and how you like it. Whether you wish to wake up to a macchiato, relax with a cappuccino, serve up a strong espresso, or froth the perfect latte, Bosch makes it easier to brew it like a barista. And with our intuitive Home Connect™ app, you can control it all from your smartphone or tablet.

Built-in Coffee Machine

Built-in Coffee Machine with Home Connect™
BCM8450UC

- Prepare Espresso, Cappuccino, Latte Macchiato & More in Minutes
- Brew Coffee from Anywhere in Your Home with the Home Connect™ App
- Consistent Brewing Temperature for a Better Tasting Coffee
- Prepare Your Favorite Cup of Coffee with the Simple Touch of a Button
- MyFavorites Stores up to 8 of Your Favorite Coffee Preferences

Home Connect

Built-in Coffee Machine with Home Connect™
Stainless Steel – BCM8450UC

General Properties	
Modes	Caffé Latte, Cappuccino, Coffee, Espresso, Espresso Macchiato, Latte Macchiato, Ristretto, Hot Water, Warm Milk, Steam Clean, Clean, Descaling
Settings	One or two cups, adjustable cup sizes, brewing temperature, coffee strength, grind adjustment
Programming	Home Connect™, personalized beverages, remote settings, language, light and display brightness, water hardness, temperature, time, key sounds, demo, child-proof lock
Home Connect™ features	Remote start, additional beverage options, adjustable settings, remote warnings, reminders, play list, coffee recipes, remote diagnosis, tips and trick videos, use and care manual, shop online
Sensor alerts	Water level, bean container, drip tray, coffee grounds
Design Elements	
Display	Large color touch screen
Selection dial	Stainless steel ring
Beverage dispenser	Adjustable
Double cup settings	Yes
Display brightness	Adjustable
Light brightness	Adjustable
Flush installation	Yes
Container access	Front door
Capacity	
Capacity of water container	$5/8$ gallon
Bean container	1 lb.
Stainless steel milk container	17 oz.
Powder coffee	1 Scoop
Technical Details	
Watts (W)	1,600 W
Circuit breaker (A)	15 A
Current (A)	10 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	39"
Plug type	120V-3 prong
Energy source	Electric
Pump pressure (bar)	275 psi (19 bar)
Grinding system	Ceramic disks
Cleaning system	Automatic
Milk clean system	Steam
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in) (not including transformer)	23 $3/8$" W x 17 $7/8$" H x 14" D
Net weight (lbs)	43 lbs*
Transformer weight (lbs)	27.5 lbs
Accessories – Included	
Stainless steel milk container, powder coffee scoop, 1 water hardness test strip	

Optional Accessories				
HEZCMT3050 30" Stainless Steel Trim Kit	11005967 Stainless Steel Milk Container	00573828 Descaling Tablets	00573829 Cleaning Tablets	12008246 Water Filter

Built-in Coffee Machine

Product Dimensions and Installation

min. 23 $1/2$" (min. 597) depth including transformer

14" (356)
22" (558)
17 $3/4$"+$1/8$" (450+²)
1 $3/8$" (35)
17 $7/8$" (455)
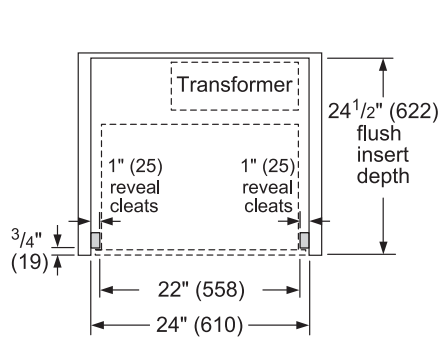17 $5/8$" (449)
7" (175)
22"+$5/16$" (560+⁸)
23 $3/8$" (594)
$3/4$" (19)
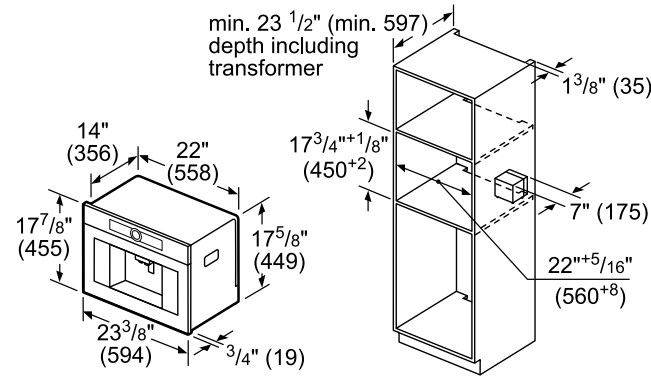
Bean and water reservoir are removed to the front. Recommended installation height 37 $1/2$"-57" (95–145 cm).

measurements in inches (mm)

Design Tip
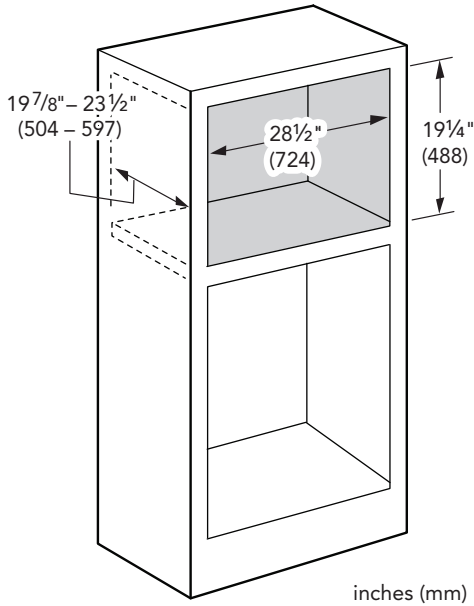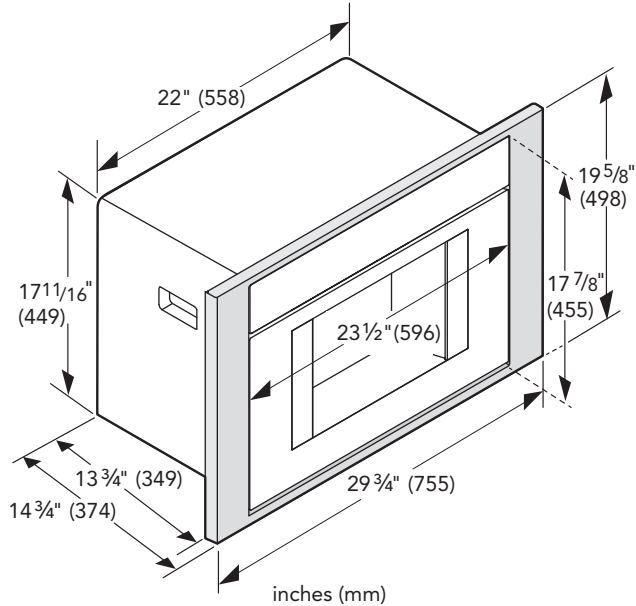**The Bosch Built-in Coffee Machine and 30" Trim Kit pair perfectly with a Bosch Warming or Storage Drawer.**

30" Warming Drawer – HWD5051UC
30" Storage Drawer – HSD5051UC

Flush Installation

Top View

Transformer
24 $1/2$" (622) flush insert depth
1" (25) reveal cleats
1" (25) reveal cleats
$3/4$" (19)
22" (558)
24" (610)

Side View

$3/4$" (19)
reveal cleats
17 $5/8$" (449)
17 $7/8$" (455)
18" (457) flush cut out height
24 $1/2$" (622)
Transformer
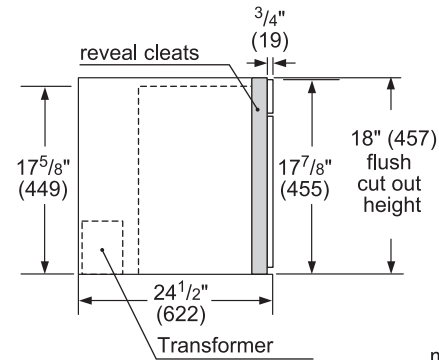
measurements in inches (mm)

Cutout Dimensions with Optional Trim Kit HEZCMT3050

22" (558)
19 $5/8$" (498)
17 11/16" (449)
23 $1/2$" (596)
17 $7/8$" (455)
13 $3/4$" (349)
14 $3/4$" (374)
29 $3/4$" (755)

inches (mm)

19 $7/8$" – 23 $1/2$" (504 – 597)
28 $1/2$" (724)
19 $1/4$" (488)

inches (mm)

1–800–944–2904 | bosch-home.com/us

Ranges

Combining function and designed to perform beautifully, Bosch ranges serve as the kitchen's daily companion. Engineered for precision and reliability, bring ease and joy to cooking. Our slide-in ranges are available in gas, dual-fuel, induction, and electric, and offer a features that lend speed and efficiency. The oven features Genuine European Convection for even cooking on all racks, while innovative cooking methods like induction make cooking easier.

The new industrial-style freestanding ranges feature bold, heavy duty die-cast metal control knobs as well as pedestal feet to make a beautiful focal point in any kitchen.

800 Series Induction Slide-in Ranges

Induction
HII8056U (Stainless Steel)
HII8046U (Black Stainless Steel)

- Full-Depth Slide-in Range
- Precise, Fast and Efficient Cooking
- SpeedBoost®
- Multi-Rack Genuine European Convection
- Temperature Probe
- Warming Drawer
- 4.6 cu. ft.

Black
Stainless Steel

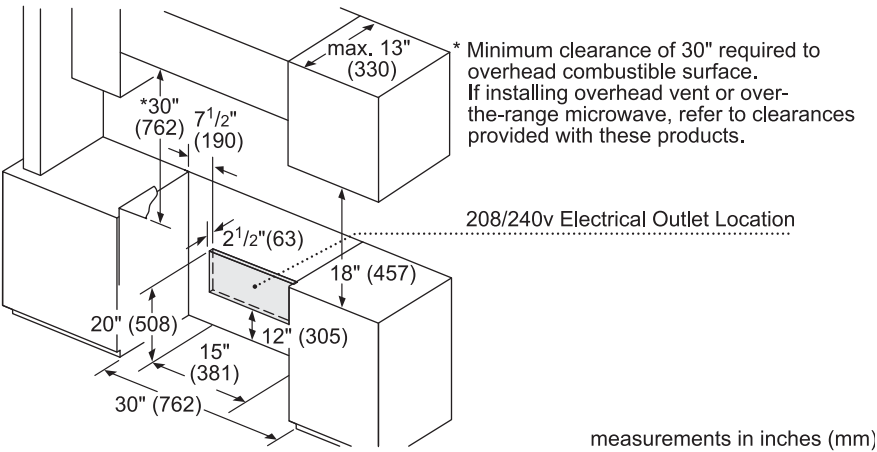| Induction	
Stainless Steel – HII8056U	
Black Stainless Steel – HII8046U	
General Properties	
Cooking modes	Bake, Variable Broil (Hi & Low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Temperature Probe, Fast Preheat, Sabbath
Cleaning type	Self clean
Knob material	N/A
Interior light	1
Kitchen timer	Yes
Drawer type	Warming drawer
Oven Performance	
Bake / broil element watts (W)	2,400 / 3,800 W
Convection element watts (W)	2,000 W
Element Performance	
Total number of cooktop elements	4
Power of front left element watts (W)	1,400 W (2,200 w/boost)
Power of back left element watts (W)	2,200 W (3,700 w/boost)
Power of center element watts (W)	N/A
Power of back right element watts (W)	2,600 W (3,700 w/boost)
Power of front right element watts (W)	1,400 W (2,200 w/boost)
Element Size	
Dimension of front left heating element	6"
Dimension of back left heating element	9"
Dimension of center heating element	N/A
Dimension of back right heating element	11"
Dimension of front right heating element	6"
Technical Details	
Watts (W)	11,700 / 14,000 W
Circuit breaker (A)	40 A
Volts (V); Frequency (Hz)	208 V / 240 V; 60 Hz
Plug type / Cord length (in.)	N/A / N/A
Energy source	Electric
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in.)	36 1/2" – 38" x 31 1/2" x 28 7/8"
Required cutout size (HxWxD) (in.)	35 1/2" – 37" x 30" x 25"
Adjustable range height (in.)	1 1/2"
Oven cavity size (cu. ft.)	4.6
Overall oven interior dimensions (HxWxD) (in.)	17 13/16" x 24 1/8" x 18"
Usable oven interior dimensions (HxWxD) (in.)	12 5/16" x 23 1/4" x 15 1/4"
Net weight (lbs)	239 lbs
Accessories – Included	
Included	Use and care manual, installation guide, temperature probe, 3 standard racks

800 Series Induction Slide-in Ranges

Induction Range Dimensions

28 7/8" (735)
31 1/2" (800)
24 5/16" (617)
*36 1/2"(927)- 38"(966)
29 7/8" (759)
*35 1/2"(902)- 37 "(940)
26 3/4"(681)
22 3/8"(568)

* Overall height is adjustable via leveling legs.

measurements in inches (mm)
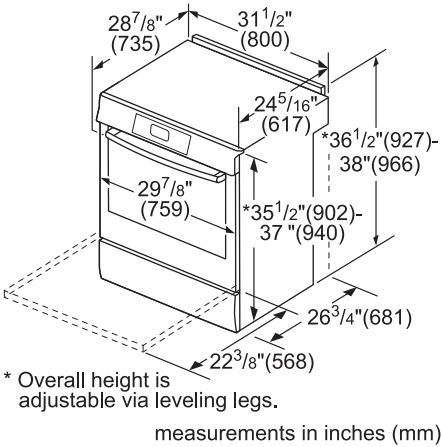
Induction Range Cutout Dimensions

25" (635)
30" (762)
35 1/2"-37" (902-940)

measurements in mm
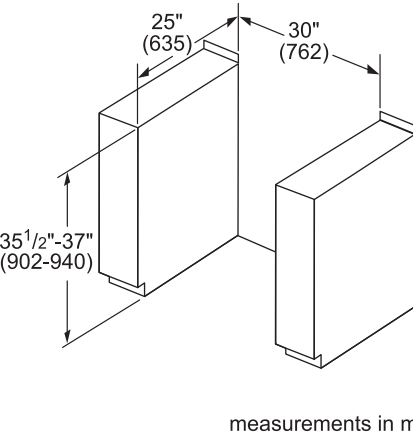
Induction Range Installation

max. 13" (330)
* Minimum clearance of 30" required to overhead combustible surface. If installing overhead vent or over-the-range microwave, refer to clearances provided with these products.

*30" (762)
7 1/2" (190)
2 1/2" (63)
18" (457)
20" (508)
12" (305)
15" (381)
30" (762)

208/240v Electrical Outlet Location

measurements in inches (mm)

Optional Accessories

HEZTR301
30" Telescopic Rack

HEZBS301
4" Low Backguard
(Stainless Steel)

HEZ390210
8" AutoChef® Pan
for 6" Element

HEZ390220
9" AutoChef® Pan
for 7" Element

HEZ390230
10" AutoChef® Pan
for 8" and 9" Elements

1–800–944–2904 | bosch-home.com/us
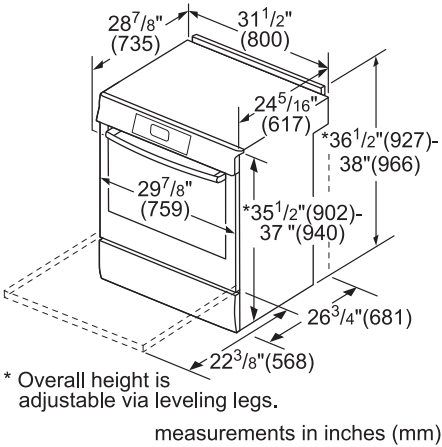
800 Series Electric Slide-in Ranges

Electric
HEI8056U (Stainless Steel)
HEI8046U (Black Stainless Steel)

• Full-Depth Slide-in Range
• 6" / 9" 3,000-Watt Dual-Ring Element
• 9.5" 3,200- / 1,100-Watt Versatile Element
• 4 Elements + 1 Warming Zone
• Multi-Rack Genuine European Convection
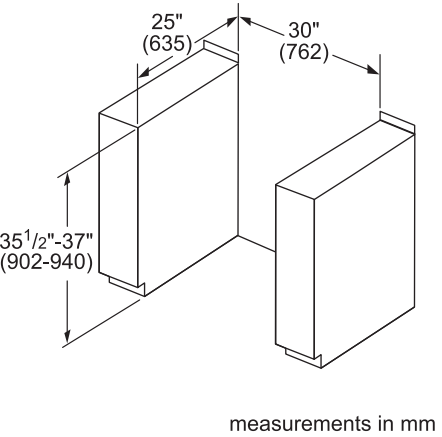• Warming Drawer
• 4.6 cu. ft.

Black
Stainless Steel

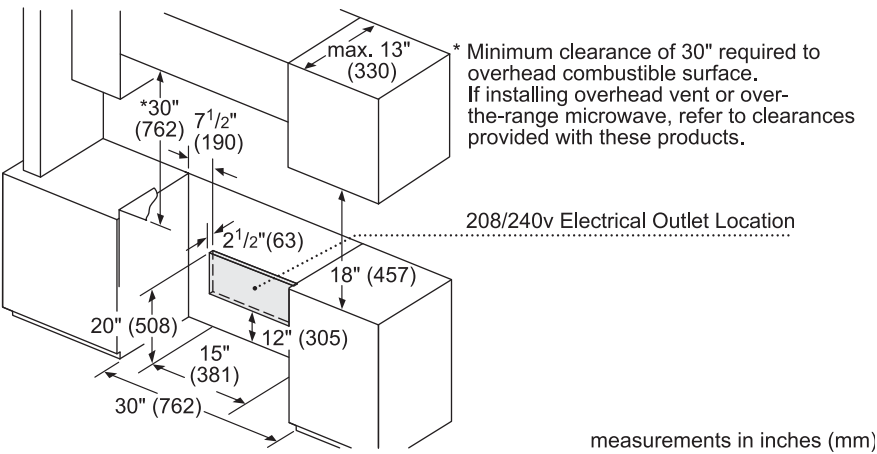| Electric	
Stainless Steel – HEI8056U Black Stainless Steel – HEI8046U	
General Properties	
Cooking modes	Bake, Variable Broil (Hi & Low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Fast Preheat, Sabbath
Cleaning type	Self clean
Knob material	Metal
Interior light	1
Kitchen timer	Yes
Drawer type	Warming drawer
Oven Performance	
Bake / broil element watts (W)	2,400 / 3,800 W
Convection element watts (W)	2,000 W
Element Performance	
Total number of cooktop elements	5
Power of front left element watts (W)	1,400 / 3,000 W
Power of back left element watts (W)	1,200 W
Power of center element watts (W)	100 W
Power of back right element watts (W)	1,200 W
Power of front right element watts (W)	1,100 / 3,200 W
Element Size	
Dimension of front left heating element	6" / 9"
Dimension of back left heating element	6"
Dimension of center heating element	6"
Dimension of back right heating element	6"
Dimension of front right heating element	9.5"
Technical Details	
Watts (W)	11,300 / 14,800 W
Circuit breaker (A)	40 A
Volts (V); Frequency (Hz)	208 V / 240 V; 60 Hz
Plug type / Cord length (in.)	N/A / N/A
Energy source	Electric
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in.)	36 $1/2$" – 38" x 31 $1/2$" x 28 $7/8$"
Required cutout size (HxWxD) (in.)	35 $1/2$" – 37" x 30" x 25"
Adjustable range height (in.)	1 $1/2$"
Oven cavity size (cu. ft.)	4.6
Overall oven interior dimensions (HxWxD) (in.)	17 $13/16$" x 24 $1/8$" x 18"
Usable oven interior dimensions (HxWxD) (in.)	12 $5/16$" x 23 $1/4$" x 15 $1/4$"
Net weight (lbs)	229 lbs
Accessories – Included	
Included	Use and care manual, installation guide, 3 standard racks

Electric Range Dimensions

28$7/8$" (735)
31$1/2$" (800)
24$5/16$" (617)
*36$1/2$"(927)- 38"(966)
29$7/8$" (759)
*35$1/2$"(902)- 37 "(940)
26$3/4$"(681)
22$3/8$"(568)

* Overall height is adjustable via leveling legs.

measurements in inches (mm)

Electric Range Cutout Dimensions

25" (635)
30" (762)
35$1/2$"-37" (902-940)

measurements in mm

Electric Range Installation

max. 13" (330)
* Minimum clearance of 30" required to overhead combustible surface. If installing overhead vent or over-the-range microwave, refer to clearances provided with these products.
*30" (762)
7$1/2$" (190)
2$1/2$"(63)
18" (457)
208/240v Electrical Outlet Location
20" (508)
15" (381)
12" (305)
30" (762)

measurements in inches (mm)

Optional Accessories				

HEZTR301
30" Telescopic Rack

HEZBS301
4" Low Backguard (Stainless Steel)

HEZ390210
8" AutoChef® Pan for 6" Element

HEZ390220
9" AutoChef® Pan for 7" Element

HEZ390230
10" AutoChef® Pan for 8" and 9" Elements

1–800–944–2904 | bosch-home.com/us

Slide-in Ranges — 800 Series Electric

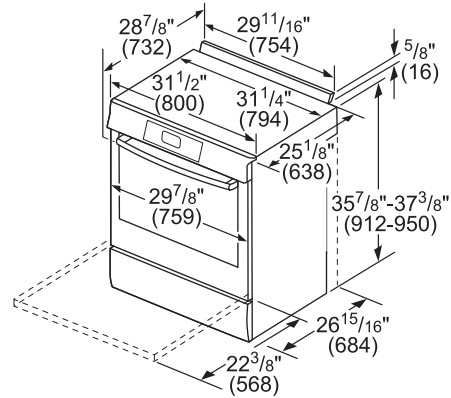# 800 Series Dual-Fuel Slide-in Range

HDI8056U (Dual-Fuel)

- Full-Depth Slide-in Range
- 18,000 BTU Burner
- 5 Burners
- Multi-Rack Genuine European Convection
- Temperature Probe
- Warming Drawer
- 4.6 cu. ft.

	Dual-Fuel
	Stainless Steel – HDI8056U
General Properties	
Cooking modes	Bake, Variable Broil (Hi & Low), Roast, Warm, Proof Dough, Convection Bake, Convection Broil, Convection Roast, Multi-Rack Genuine European Convection, Convection Conversion, Pizza, Temperature Probe, Fast Preheat, Sabbath
Cleaning type	Self clean
Type of grate	Cast iron
Knob material	Metal
Interior light	1
Kitchen timer	Yes
Drawer type	Warming drawer
Sealed burners	Yes
Oven Performance	
Bake / broil element watts (W)	2,400 / 3,800 W
Convection element watts (W)	2,000 W
Burner Performance	
Total number of cooktop burners	5
Total cooktop (NG / LP) BTU	53,000 / 44,000
Power of front left burner (NG / LP) BTU	10,000 / 8,000
Power of back left burner (NG / LP) BTU	5,000 / 5,000
Power of center burner (NG / LP) BTU	18,000 / 12,500
Power of back right burner (NG / LP) BTU	5,000 / 5,000
Power of front right burner (NG / LP) BTU	15,000 / 13,500
Technical Details	
Watts (W)	4,800 / 6,400 W
Circuit breaker (A)	30 A
Volts (V)	208 V / 240 V
Frequency (Hz)	60 Hz
Plug type / Cord length (in.)	N/A / N/A
Energy source	Mixed electric / gas
Gas type	Natural gas 15 mbar (USA)
Alternative gas type	LP 27.5 mbar (USA)
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in.)	36 $1/2$" – 38" x 31 $1/2$" x 28 $7/8$"
Required cutout size (HxWxD) (in.)	35 $1/2$" – 37" x 30" x 25"
Adjustable range height (in.)	1 $1/2$"
Oven cavity size (cu. ft.)	4.6
Overall oven interior dimensions (HxWxD) (in.)	17 $13/16$" x 24 $1/8$" x 18"
Usable oven interior dimensions (HxWxD) (in.)	12 $5/16$" x 23 $1/4$" x 15 $1/4$"
Net weight (lbs)	227 lbs
Accessories – Included	
Included	Use and care manual, installation guide, temperature probe, LP conversion kit, 3 standard racks

Dual-Fuel Range Dimensions

28$7/8$" (732), 29$11/16$" (754), $5/8$" (16), 31$1/2$" (800), 31$1/4$" (794), 25$1/8$" (638), 29$7/8$" (759), 35$7/8$"-37$3/8$" (912-950), 26$15/16$" (684), 22$3/8$" (568)

measurements in inches and (mm)

Dual-Fuel Cutout Dimensions

25" (635), 30" (762), 35$1/2$"-37" (902-940)
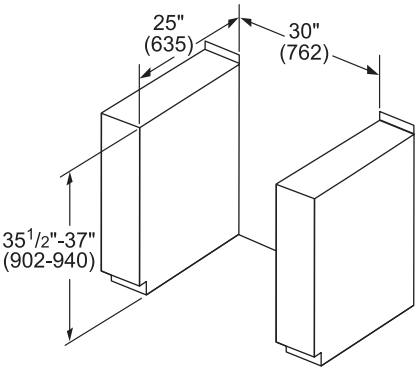
measurements in mm

Dual-Fuel Range Installation

max. 13" (330)

min. 18" (457), *30" (762)

**10" (254)

15" (381)

5" (127)

2$1/2$" (63)

2$1/2$" (63), 8" (203)

5" (127), 12" (305)

30" (762), 13" (330)

* Minimum clearance of 30" required to overhead combustible surface. If installing overhead vent or over-the-range microwave, refer to clearances provided with these products.

** Minimum clearance of 10" required from cutout to combustible side walls.

Gas Hard Pipe Connection Location

208/240v Electrical Outlet Location

Gas Flex Line Connection

measurements in inches (mm)

Island Trim – Dual-Fuel Range

30$11/16$" (780 mm), 1$1/8$" (28 mm), 2$1/2$" (63 mm), 1$1/8$" (28 mm), 2$1/2$" (63 mm), $5/8$" (16 mm)

Measurements in inches

Optional Accessories

HEZTR301
30" Telescopic Rack

HDZBS301
4" Low Backguard, Dual-Fuel (Stainless Steel)

HEZGR301
Griddle

HEZ298102
Wok Ring

HDZIT301
Island Trim for Island Applications, Dual-Fuel (Stainless Steel)

1–800–944–2904 | bosch-home.com/us

800 Series Gas Slide-in Range

Gas
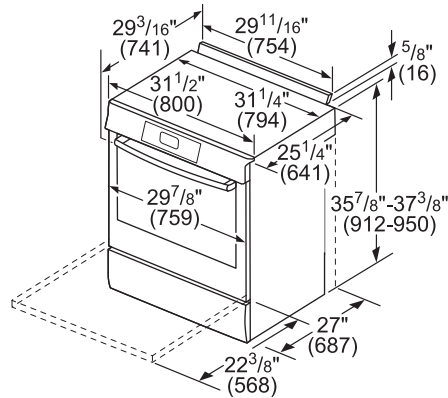**HGI8056UC (Stainless Steel)**
HGI8046UC (Black Stainless Steel)

• Full-Depth Slide-in Range
• 18,000 BTU Burner
• 5 Burners
• Heavy-duty Metal Knobs
• Warming Drawer
• 4.8 cu. ft.

Black
Stainless Steel

Gas	
Stainless Steel – HGI8056UC Black Stainless Steel – HGI8046UC	
General Properties	
Cooking modes	Bake, Variable Broil (Hi & Low), Roast, Warm, Proof Dough, Convection Bake, Convection Roast, Convection Conversion, Pizza, Sabbath
Cleaning type	Self clean
Type of grate	Cast iron
Knob material	Metal
Interior light	1
Kitchen timer	Yes
Drawer type	Warming drawer
Sealed burners	Yes
Oven Performance	
Bake / broil burner power BTU	18,000 / 12,500 BTU
Burner Performance	
Total number of cooktop burners	5
Total cooktop (NG / LP) BTU	53,000 / 46,500
Power of front left burner (NG / LP) BTU	10,000 / 8,000
Power of back left burner (NG / LP) BTU	5,000 / 5,000
Power of center burner (NG / LP) BTU	18,000 / 15,000
Power of back right burner (NG / LP) BTU	5,000 / 5,000
Power of front right burner (NG / LP) BTU	15,000 / 13,500
Technical Details	
Circuit breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug type	US 3-prong
Cord length (in.)	78"
Energy source	Gas
Gas type	Natural gas 15 mbar (USA)
Alternative gas type	LP 27.5 mbar (USA)
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in.)	36 1/2" – 38" x 31 1/2" x 29 3/16"
Required cutout size (HxWxD) (in.)	35 1/2" – 37" x 30" x 25 1/4"
Adjustable range height (in.)	1 1/2"
Oven cavity size (cu. ft.)	4.8
Overall oven interior dimensions (HxWxD) (in.)	17 13/16" x 24 1/8" x 18"
Usable oven interior dimensions (HxWxD) (in.)	11 1/2" x 23 1/4" x 15 1/4"
Net weight (lbs)	228 lbs
Accessories – Included	
Included	Use and care manual, installation guide, LP conversion kit, 3 standard racks

Gas Range Dimensions

29 3/16" (741) 29 11/16" (754) 5/8" (16)
31 1/2" (800) 31 1/4" (794)
25 1/4" (641)
29 7/8" (759) 35 7/8"-37 3/8" (912-950)
27" (687)
22 3/8" (568)

measurements in inches and (mm)

Gas Cutout Dimensions

*25 1/4" (641) 30" (762)
35 1/2"-37 (902-940)
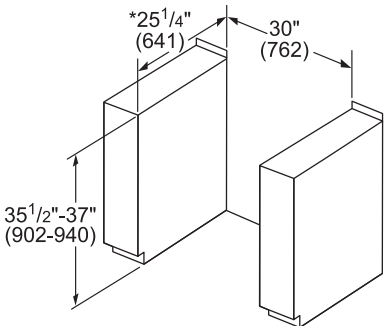
* For island installation with island trim (HGZIT301), use a cutout depth of 25 3/8" (645)

measurements in inches and (mm)

Gas Range Installation

max. 13" (330)
min. 18" (457) *36" (914)
**10" (254)
2 1/2" (63) 15" (381)
5" (127)
2 1/2" (63)
5" (127) 13" (33)
30" (762) 12" (305)

* Minimum clearance of 36" required to overhead combustible surface. If installing overhead vent or over-the-range microwave, refer to clearances provided with these products.
** Minimum clearance of 10" required from cutout to combustible side walls.

Gas Hard Pipe Connection Location
Gas Flex Line Connection
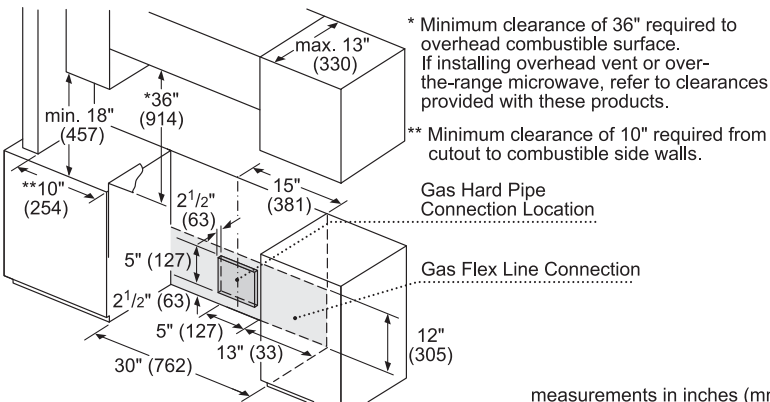
measurements in inches (mm)

Island Trim – Gas Range

30 11/16" (780 mm)
1 1/8" (28 mm) 2 1/2" (63 mm)
1 1/8" (28 mm)
2 1/2" (63 mm) 3/8" (9 mm)
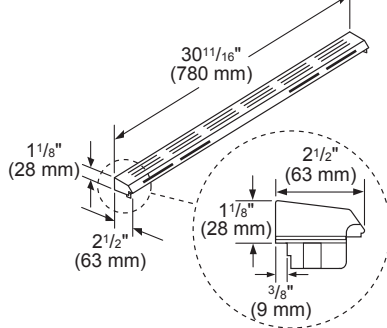
Measurements in inches

Optional Accessories				
HEZTR301 30" Telescopic Rack	HGZBS301 4" Low Backguard, Gas (Stainless Steel)	HEZGR301 Griddle	HEZ298102 Wok Ring	HGZIT301 Island Trim for Island Applications, Gas (Stainless Steel)

Slide-in Ranges — 800 Series Gas

800 Series Industrial Style Gas & Dual-Fuel Ranges

30" Gas 800 Series
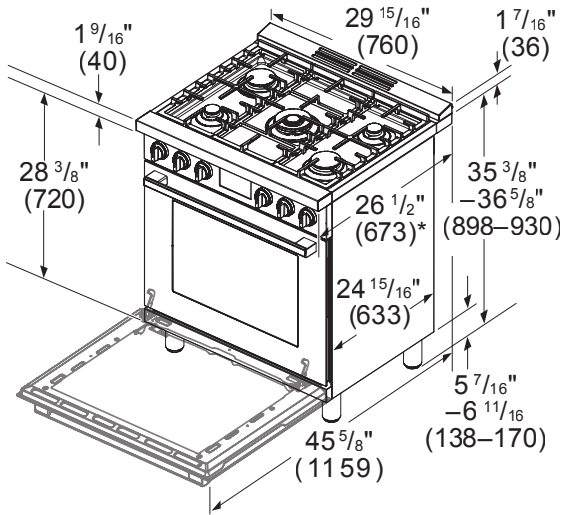HGS8055UC (Stainless Steel)
HGS8045UC (Black Stainless Steel)

- Commercial Design with 5 Burners
- 18,000 BTU Dual Flame Ring Power Burner
- Dishwasher-safe Grates
- Quiet Close Door

Black Stainless Steel

30" Dual-Fuel 800 Series
HDS8055U (Stainless Steel)
HDS8045U (Black Stainless Steel)

- Commercial Design with 5 Burners
- 18,000 BTU Dual Flame Ring Power Burner
- Dishwasher-safe Grates
- Quiet Close Door
- Multi-Rack Genuine European Convection
- Temperature Probe

Stainless Steel

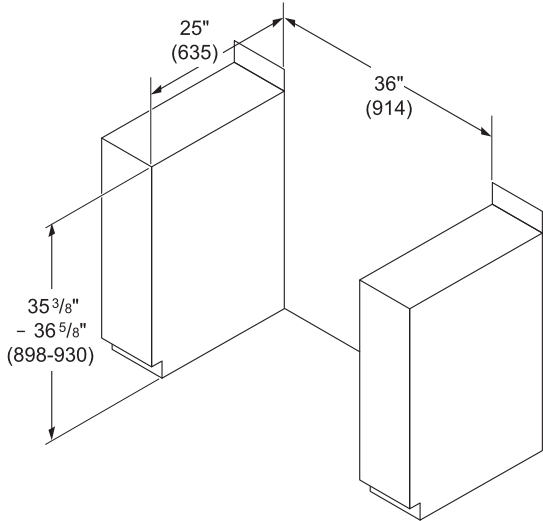|	Gas	Dual-Fuel
	HGS8055UC – Stainless Steel HGS8045UC – Black Stainless Steel	HDS8055U – Stainless Steel HDS8045U – Black Stainless Steel
General Properties		
Cooking modes	Bake, Convection Bake, Broil	Bake, Convection Bake, Broil, Convection Broil, Convection Roast, Pizza, Proof, Multi-rack Genuine European Convection, Sabbath Mode, Temperature Probe
Cleaning type	Catalytic Clean Coating	Catalytic Clean Coating
Type of grate	Cast iron	Cast iron
Knob material	Metal	Metal
Interior light	1	1
Kitchen timer	Yes	Yes
Sealed burners	Yes	Yes
Oven Performance		
Bake / broil burner power BTU	17,000 / 11,500 BTU	Not available
Bake / broil element watts (W)	Not available	1,700 / 2,900 W
Convection element watts (W)	Not available	2,700 W
Burner Performance		
Total number of cooktop burners	5	5
Total cooktop (NG / LP) BTU	48,000 / 48,000	48,000 / 48,000
Power of front left burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of back left burner (NG / LP) BTU	10,000 / 10,000	10,000 / 10,000
Power of center burner (NG / LP) BTU	18,000 / 18,000	18,000 / 18,000
Power of back right burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of front right burner (NG / LP) BTU	10,000 / 10,000	10,000 / 10,000
Technical Details		
Circuit breaker (A)	15 A	20 A
Volts (V)	120 V	208V / 240V
Frequency (Hz)	60 Hz	60 Hz
Plug type	US 3-prong	Not available
Cord length (in.)	59" with plug	Not available
Energy source	Gas	Mixed Electric / Gas
Gas type	Natural gas 14.9 mbar (USA) [7" WC]	Natural gas 14.9 mbar (USA) [7" WC]
Alternative gas type	LP 27.4 mbar (USA)[11" WC]	LP 27.4 mbar (USA) [11" WC]
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in.)	36" x 29 $^{15}/_{16}$" x 24 $^{15}/_{16}$" (26 $^{1}/_{2}$" with bull nose)	36" x 29 $^{15}/_{16}$" x 24 $^{15}/_{16}$" (26 $^{1}/_{2}$" with bull nose)
Required cutout size (HxWxD) (in.)	36" x 30" x 25"	36" x 30" x 25"
Adjustable range height (in.)	35 $^{3}/_{8}$" Min. – 36 $^{5}/_{8}$" Max.	35 $^{3}/_{8}$" Min. – 36 $^{5}/_{8}$" Max.
Oven cavity size (cu. ft.)	3.6	3.9
Overall oven interior dimensions (HxWxD) (in.)	17 $^{3}/_{8}$" x 24 $^{1}/_{3}$" x 18 $^{3}/_{8}$"	17 $^{3}/_{8}$" x 24 $^{1}/_{3}$" x 18 $^{3}/_{8}$"
Usable oven interior dimensions (HxWxD) (in.)	17" x 24 $^{3}/_{16}$" x 17 $^{5}/_{32}$"	17 $^{5}/_{16}$" x 22 $^{13}/_{16}$" x 17 $^{1}/_{8}$"
Net weight (lbs)	193 lbs	195 lbs

800 Series Industrial Style Gas & Dual-Fuel Ranges

Industrial Style Range Dimensions

* Front of Bull Nose to Back Wall Spacer

Industrial Style Range Cutout Dimensions

Industrial Style Range Installation

measurements in inches (mm)

X = Grounded Outlet
Y = Gas Supply Line

B   minimum 18" (457 mm)
C   minimum 30" (762 mm) clearance between the top of the cooking surface and the bottom of the unprotected wood or metal cabinet
D   30": minimum 30" (762 mm)
36": minimum 36" (914 mm)
E   minimum 25" (635 mm)
F   maximum 13" (330 mm)
G   30": minimum 30" (762 mm)
36": minimum 36" (914 mm)
Zero clearance between adjacent combustible construction below the countertop surface and sides of the appliance.
H   35"6/16 - 36"10/16 (898 - 930 mm)
I   11" (279 mm)
J   7" (178 mm)
K   6" (150 mm)
L   11" (279 mm)

*   Minimum clearance of >= 12" (305 mm) on one and >= 28" (711 mm) on the other side from cutout to side walls.

Accessories – Included (Gas and Dual Fuel)

Use and care manual, installation guide, LP conversion kit, 2 standard racks

Optional Accessories

HEZ9GR41UC
Griddle

HEZ9YZ30UC
30" Low Backguard
Stainless Steel

HEZ9ZZ30UC
30" Rear Vent Trim Extension
Stainless Steel

HEZ9YZ04UC
Side Panel Extension Kit
Stainless Steel

HEZ9GW23UC
Wok Ring

HEZ8YZ30UC
30" Low Backguard
Black Stainless Steel

HEZ8ZZ30UC
30" Rear Vent Trim Extension
Black Stainless Steel

HEZ8YZ04UC
Side Panel Extension Kit
Black Stainless Steel

1–800–944–2904 | bosch-home.com/us

800 Series Industrial Style Gas & Dual-Fuel Ranges

36" Gas 800 Series
HGS8655UC (Stainless Steel)
HGS8645UC (Black Stainless Steel)

- Commercial Design with 6 Burners
- 18,000 BTU Dual Flame Ring Power Burner
- Dishwasher-safe Grates
- Quiet Close Door
- Telescopic Rack

Black Stainless Steel

36" Dual-Fuel 800 Series
HDS8655U (Stainless Steel)
HDS8645U (Black Stainless Steel)

- Commercial Design with 6 Burners
- 18,000 BTU Dual Flame Ring Power Burner
- Dishwasher-safe Grates
- Quiet Close Door
- Telescopic Rack
- Multi-Rack Genuine European Convection
- Temperature Probe

Stainless Steel

	Gas	Dual-Fuel
	HGS8655UC – Stainless Steel HGS8645UC – Black Stainless Steel	HDS8655U – Stainless Steel HDS8645U – Black Stainless Steel
General Properties		
Cooking modes	Bake, Convection Bake, Broil	Bake, Convection Bake, Broil, Convection Broil, Convection Roast, Pizza, Proof, Multi-rack Genuine European Convection, Sabbath Mode, Temperature Probe
Cleaning type	Catalytic Clean Coating	Catalytic Clean Coating
Type of grate	Cast iron	Cast iron
Knob material	Metal	Metal
Interior light	1	1
Kitchen timer	Yes	Yes
Sealed burners	Yes	Yes
Oven Performance		
Bake / broil burner power BTU	17,000 / 14,000 BTU	Not available
Bake / broil element watts (W)	Not available	1,700 / 2,900 W
Convection element watts (W)	Not available	2,500 W
Burner Performance		
Total number of cooktop burners	6	6
Total cooktop (NG / LP) BTU	63,000 / 63,000	63,000 / 63,000
Power of front left burner (NG / LP) BTU	18,000 / 18,000	18,000 / 18,000
Power of back left burner (NG / LP) BTU	5,000 / 5,000	5,000 / 5,000
Power of back center burner (NG / LP) BTU	10,000 / 10,000	10,000 / 10,000
Power of front center burner (NG / LP) BTU	10,000 / 10,000	10,000 / 10,000
Power of back right burner (NG / LP) BTU	10,000 / 10,000	10,000 / 10,000
Power of front right burner (NG / LP) BTU	10,000 / 10,000	10,000 / 10,000
Technical Details		
Circuit breaker (A)	15 A	20 A
Volts (V)	120 V	208V / 240V
Frequency (Hz)	60 Hz	60 Hz
Plug type	US 3-prong	Not available
Cord length (in.)	59" with plug	Not available
Energy source	Gas	Mixed Electric / Gas
Gas type	Natural gas 14.9 mbar (USA) [7" WC]	Natural gas 14.9 mbar (USA) [7" WC]
Alternative gas type	LP 27.4 mbar (USA)[11" WC]	LP 27.4 mbar (USA) [11" WC]
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in.)	36" x 35 $\frac{15}{16}$"" x 24 $\frac{15}{16}$" (26 $\frac{1}{2}$" with bull nose)	36" x 35 $\frac{15}{16}$"" x 24 $\frac{15}{16}$" (26 $\frac{1}{2}$" with bull nose)
Required cutout size (HxWxD) (in.)	36" x 36" x 25"	36" x 36" x 25"
Adjustable range height (in.)	35 $\frac{19}{32}$" Min. – 36 $\frac{39}{64}$" Max.	35 $\frac{19}{32}$" Min. – 36 $\frac{39}{64}$" Max.
Oven cavity size (cu. ft.)	3.4	3.7
Overall oven interior dimensions (HxWxD) (in.)	15" x 28 $\frac{7}{16}$" x 17 $\frac{11}{16}$"	15 $\frac{1}{32}$" x 28 $\frac{7}{16}$" x 17 $\frac{9}{16}$"
Usable oven interior dimensions (HxWxD) (in.)	15" x 28 $\frac{11}{32}$" x 17 $\frac{11}{16}$"	14 $\frac{9}{16}$" x 26 $\frac{15}{16}$" x 16 $\frac{1}{8}$"
Net weight (lbs)	207 lbs	219 lbs

800 Series Industrial Style Gas & Dual-Fuel Ranges

Industrial Style Range Dimensions
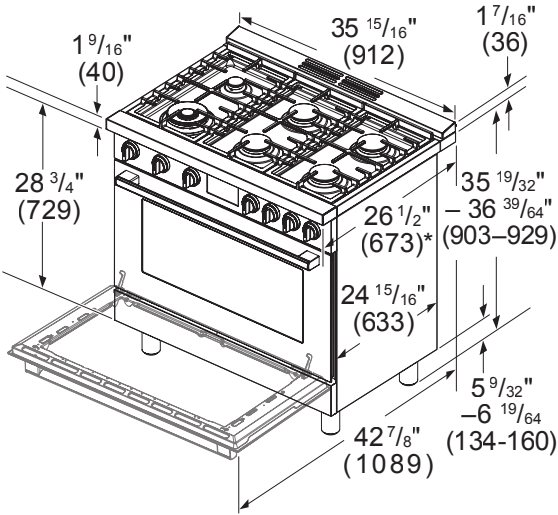
* Front of Bull Nose to Back Wall Spacer

Industrial Style Range Cutout Dimensions

Accessories – Included (Gas and Dual Fuel)

Use and care manual, installation guide, LP conversion kit, 1 standard rack, 1 telescopic rack

Industrial Style Range Installation

measurements in inches (mm)

X = Grounded Outlet
Y = Gas Supply Line

B   minimum 18" (457 mm)
C   minimum 30" (762 mm) clearance between the top of the cooking surface and the bottom of the unprotected wood or metal cabinet
D   30": minimum 30" (762 mm)
    36": minimum 36" (914 mm)
E   minimum 25" (635 mm)
F   maximum 13" (330 mm)
G   30": minimum 30" (762 mm)
    36": minimum 36" (914 mm)
    Zero clearance between adjacent combustible construction below the countertop surface and sides of the appliance.
H   35"6/16 - 36"10/16 (898 - 930 mm)
I   11" (279 mm)
J   7" (178 mm)
K   6" (150 mm)
L   11" (279 mm)

*   Minimum clearance of >= 12" (305 mm) on one and >= 28" (711 mm) on the other side from cutout to side walls.

Optional Accessories

HEZ9GR41UC
Griddle

HEZ9YZ36UC
36" Low Backguard
Stainless Steel

HEZ9ZZ36UC
36" Rear Vent Trim Extension
Stainless Steel

HEZ9YZ04UC
Side Panel Extension Kit
Stainless Steel

HEZ9GW23UC
Wok Ring

HEZ8YZ36UC
36" Low Backguard
Black Stainless Steel

HEZ8ZZ36UC
36" Rear Vent Trim Extension
Black Stainless Steel

HEZ8YZ04UC
Side Panel Extension Kit
Black Stainless Steel

1–800–944–2904 | bosch-home.com/us

Ventilation

Bosch's inventive ventilation systems keep mealtime fresh by quietly clearing the air of grease, steam, smoke, and odors while you cook. They're beautifully designed to seamlessly integrate into any kitchen with under-the-cabinet, chimney, island, pull-out, and downdraft styles. These easy-to-clean ventilation systems come with automated features to make maintenance and operation a breeze. You'll breathe easier knowing that smoke, steam, grease, and odors are quietly and effectively taken care of.

Ventilation Selection Guide

✓ = Design Match
(✓) = Viable Option

	Cooktops			
	24-Inch Electric & Gas	30-Inch Electric & Induction	36-Inch Electric & Induction	30-Inch Gas
Chimney Wall Hoods				
24-Inch HCP34E52UC	✓			
30-Inch HCP30E52UC	(✓)	✓		✓
30-Inch HCP50652UC		✓		✓
30-Inch HCP80641UC		✓		✓
30-Inch HCB50651UC		✓		✓
36-Inch HCP36E52UC		(✓)	✓	(✓)
36-Inch HCP56652UC		(✓)	✓	(✓)
36-Inch HCB56651UC		(✓)	✓	(✓)
36-Inch HCP86642UC		(✓)	✓	(✓)
Under-Cabinet Range Hoods				
30-Inch DUH30152UC	(✓)	✓		✓
30-Inch DUH30252UC		✓		✓
30-Inch DPH30652UC		✓		✓
36-Inch DUH36152UC		(✓)	✓	(✓)
36-Inch DUH36252UC		(✓)	✓	(✓)
36-Inch DPH36652UC		(✓)	✓	(✓)
Island Hood				
42-Inch HIB82651UC		(✓)	✓	(✓)
Custom Insert Hoods				
21-Inch HUI31451UC	✓			
29-Inch DHL755BUC	(✓)	✓		✓
Downdrafts				
30-Inch HDD80051UC		✓		✓
36-Inch HDD86051UC			✓	
Pull-Out Hoods				
24-Inch HUI54452UC	✓			
30-Inch HUI50351UC	(✓)	✓		✓
36-Inch HUI56551UC		(✓)	✓	(✓)

Ventilation Selection Guide

Cooktops	Rangetops		Slide-In Ranges	Industrial Style Ranges	
36-Inch Gas	30-Inch Gas	36-Inch Gas	Electric, Induction, Gas & Dual-Fuel	30-Inch Gas & Dual-Fuel	36-Inch Gas & Dual-Fuel
			✓	(✓)	
	✓		✓	✓	
	✓		✓	✓	
	✓		✓	✓	
✓			(✓)	(✓)	(✓)
✓	(✓)	✓	(✓)	(✓)	✓
✓	(✓)	✓	(✓)	(✓)	✓
✓	(✓)	✓	(✓)	(✓)	✓
			✓		
			✓	(✓)	
	✓		✓	✓	
✓			(✓)	(✓)	✓
✓			(✓)	(✓)	✓
✓	(✓)	✓	(✓)	(✓)	✓
✓	(✓)	✓	(✓)	(✓)	✓
			✓	✓	
	✓				
✓		✓			
			✓	✓	
✓			(✓)	(✓)	✓

Ventilation — Selection Guide

300 / 500 Series 24" / 30" Chimney Wall Hoods

24" 300 Series
Pyramid Canopy Chimney Hood
HCP34E52UC

- 300 CFM
- ENERGY STAR® Qualified
- 2 LED Lights
- Aluminum Mesh Filters
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory

30" 300 Series
Pyramid Canopy Chimney Hood
HCP30E52UC

- 300 CFM
- ENERGY STAR® Qualified
- 2 LED Lights
- Aluminum Mesh Filters
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory

30" 500 Series
Pyramid Canopy Chimney Hood
HCP50652UC

- **+** 600 CFM
- **+** 2 LED Lights
- **+** Home Connect
- Aluminum Mesh Filters
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory

Home Connect

+ Indicates a step-up feature

|	24" Pyramid Canopy	30" Pyramid Canopy	30" Pyramid Canopy
	Stainless Steel – HCP34E52UC	Stainless Steel – HCP30E52UC	Stainless Steel – HCP50652UC
General Properties			
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	300 CFM	300 CFM	600 CFM
Sones	5.5 HS / 1.3 WS	5.5 HS / 1.3 WS	10.5 HS / 2.3 WS
Number of speed settings	3-stage	3-stage	4-stage
Motor location	Integrated motor in hood chimney	Integrated motor in hood chimney	Integrated motor in hood chimney
Number and type of lights	2 LED	2 LED	2 LED
Light lumens	500	500	100 – 150
Light color (°K)	2700 – 3000	2700 – 3000	3500 – 4000
Total power of the lamps (W)	13 W	13 W	6 W
Damper included	Yes	Yes	Yes
Grease filter material	Aluminum	Aluminum	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette	Multilayer cassette
Technical Details			
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Plug type	No plug	No plug	No plug
Dimensions & Weight			
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	24 9/16" – 38 7/8" / 28 1/4" – 42 9/16" x 24" x 19 11/16"	24 9/16" – 38 7/8" / 28 1/4" – 42 9/16" x 30" x 19 11/16"	24 9/16" – 38 7/8" / 28 1/4" – 42 9/16" x 30" x 19 11/16"
Height of the chimney (in.)	19 9/16" – 33 7/8" / 23 1/4" – 42 9/16"	19 9/16" – 33 7/8" / 23 1/4" – 42 9/16"	19 9/16" – 33 7/8" / 23 1/4" – 42 9/16"
Required distance above cooktop / range cooking surface	Min. 24" electric / 27" gas	Min. 24" electric / 27" gas	Min. 30" electric / 30" gas
Diameter of air duct (in.) top	8"	8"	8"
Net weight (lbs)	49 lbs	49 lbs	49 lbs

Optional Accessories

HCPEXT5UC
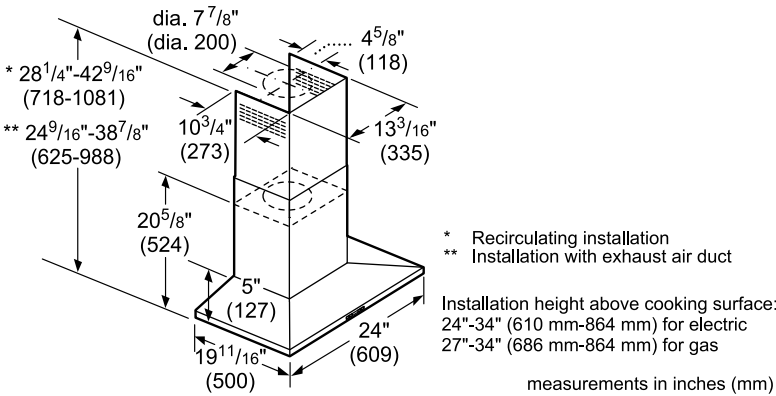Chimney Extension for
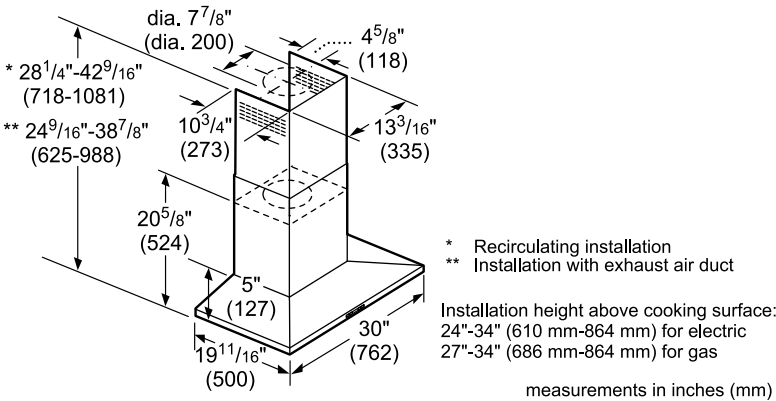9–11.5 ft. ceilings

HCIFILTUC
Filter Kit

HCREC5UC
Recirculation Kit

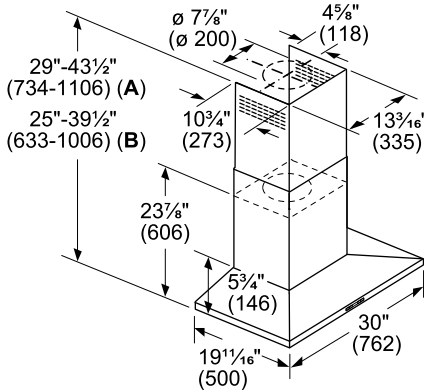# 300 / 500 Series 24" / 30" Chimney Wall Hoods
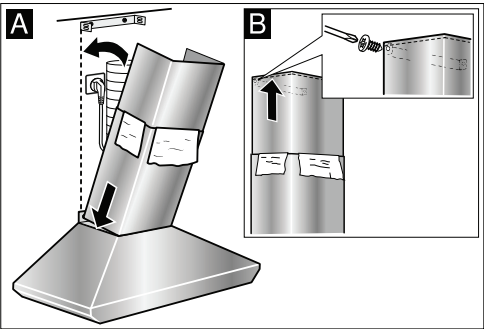
24" HCP34E52UC Pyramid Canopy Chimney Hood

dia. 7 7/8" (dia. 200)
4 5/8" (118)
* 28 1/4"-42 9/16" (718-1081)
** 24 9/16"-38 7/8" (625-988)
10 3/4" (273)
13 3/16" (335)
20 5/8" (524)
5" (127)
19 11/16" (500)
24" (609)

* Recirculating installation
** Installation with exhaust air duct

Installation height above cooking surface:
24"-34" (610 mm-864 mm) for electric
27"-34" (686 mm-864 mm) for gas

measurements in inches (mm)

30" HCP30E52UC Pyramid Canopy Chimney Hood

dia. 7 7/8" (dia. 200)
4 5/8" (118)
* 28 1/4"-42 9/16" (718-1081)
** 24 9/16"-38 7/8" (625-988)
10 3/4" (273)
13 3/16" (335)
20 5/8" (524)
5" (127)
19 11/16" (500)
30" (762)

* Recirculating installation
** Installation with exhaust air duct

Installation height above cooking surface:
24"-34" (610 mm-864 mm) for electric
27"-34" (686 mm-864 mm) for gas

measurements in inches (mm)

30" HCP50652UC Pyramid Canopy Chimney Hood

ø 7⅞" (ø 200)
4⅝" (118)
29"-43½" (734-1106) (A)
25"-39½" (633-1006) (B)
10¾" (273)
13¼₁₆" (335)
23⅞" (606)
5¾" (146)
19¹¹⁄₁₆" (500)
30" (762)

A: Recirculating installation
B: Ducted installation

Installation height above cooking surface:
30"-36" (762 mm-914 mm) to Electric
30"-36" (762 mm-914 mm) to Gas

measurements in inches (mm)

24" and 30" Pyramid Canopy Chimney Hoods

A
B

A   Lower flue duct
B   Upper flue duct

500 / 800 Series 30" Chimney Wall Hoods

**30" 500 Series
Box Canopy Chimney Hood
HCB50651UC**

+ 600 CFM
+ 2 Halogen Lights
+ Stainless Steel Filters with Metal Latch
• 9 ft.–11.5 ft. Duct Cover Extension Accessory

**30" 800 Series
Pyramid Canopy Chimney Hood
HCP80641UC**

• 600 CFM
+ 2 Halogen Lights
+ Aluminum Mesh Filters
• 9 ft.–11.5 ft. Duct Cover Extension Accessory
• Black Stainless Steel Helps Guard Against Scratches and Fingerprints

+ Indicates a step-up feature

	30" Box Canopy 500 Series	30" Pyramid Canopy 800 Series
	Stainless Steel – HCB50651UC	Black Stainless Steel – HCP80641UC
General Properties		
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	600 CFM	600 CFM
Sones	8.6 HS / 1.7 WS	9.9 HS / 4.56 WS
Number of speed settings	4-stage	4-stage
Motor location	Integrated motor in hood chimney	Integrated motor in hood chimney
Number and type of lights	2 Halogen	2 Halogen
Light lumens	360	360
Light color (°K)	3000	3000
Total power of the lamps (W)	80 W	80 W
Damper included	Yes	Yes
Grease filter material	Washable stainless steel	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette
Technical Details		
Volts (V)	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz
Plug type	No plug	No plug
Dimensions & Weight		
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	27 $^{1}/_{16}$" x 42 $^{1}/_{8}$" / 27 $^{1}/_{16}$" x 45 $^{13}/_{16}$" / 30" x 19 $^{11}/_{16}$"	24 $^{9}/_{16}$" – 38 $^{7}/_{8}$" / 28 $^{1}/_{4}$" – 42 $^{9}/_{16}$" x 30" x 19 $^{11}/_{16}$"
Height of the chimney (in.)	25 $^{1}/_{2}$" x 40 $^{9}/_{16}$" / 25 $^{1}/_{2}$" x 44 $^{1}/_{4}$"	19 $^{9}/_{16}$" – 33 $^{7}/_{8}$" / 23 $^{1}/_{4}$" – 42 $^{9}/_{16}$"
Required distance above cooktop / range cooking surface	Min. 24" electric / 27" gas	Min. 24" electric / 27" gas
Diameter of air duct (in.) top	8"	8"
Net weight (lbs)	54 lbs	49 lbs

Optional Accessories

HCBEXT5UC
Chimney Extension for 9–11.5 ft. ceilings for use with HCB50651UC

HCPEXT4UC
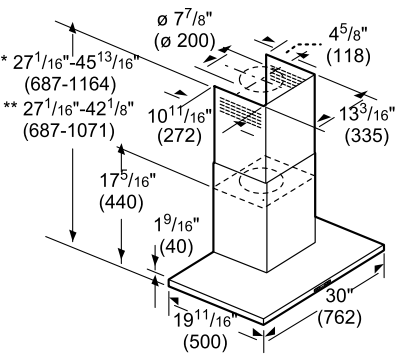Chimney Extension for 9–11.5 ft. ceilings for use with HCP80641UC & HCP86641UC

HCIFILTUC
Filter Kit

**HCREC5UC**
Recirculation Kit

500 / 800 Series 30" Chimney Wall Hoods

**30" HCB50651UC
Box Canopy Chimney Hood**

ø 7$^{7}/_{8}$" (ø 200)

4$^{5}/_{8}$" (118)

* 27$^{1}/_{16}$"-45$^{13}/_{16}$" (687-1164)
** 27$^{1}/_{16}$"-42$^{1}/_{8}$" (687-1071)

10$^{11}/_{16}$" (272)

13$^{3}/_{16}$" (335)

17$^{5}/_{16}$" (440)

1$^{9}/_{16}$" (40)

30" (762)

19$^{11}/_{16}$" (500)

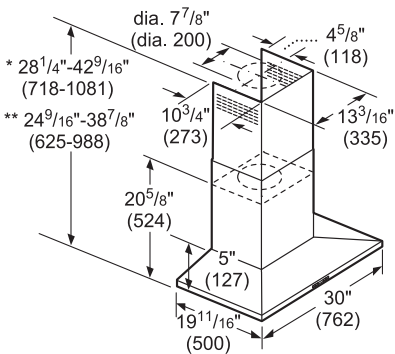* Recirculating installation
** Ducted installation

Installation height above cooking surface:
24"-34" (610 mm-864 mm) to Electric
27"-34" (686 mm-864 mm) to Gas

measurements in inches (mm)
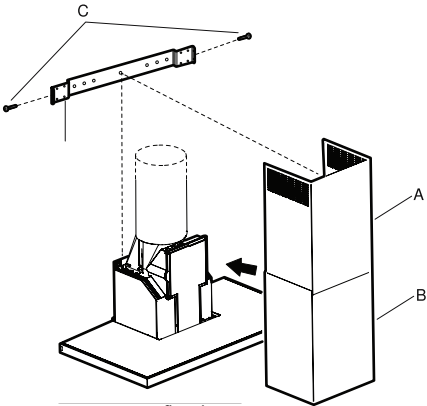
| A	Upper flue duct
B	Lower flue duct
C	Screws
D	Angle bracket

**30" HCP80641UC
Pyramid Canopy Chimney Hood**

dia. 7$^{7}/_{8}$" (dia. 200)

4$^{5}/_{8}$" (118)

* 28$^{1}/_{4}$"-42$^{9}/_{16}$" (718-1081)
** 24$^{9}/_{16}$"-38$^{7}/_{8}$" (625-988)

10$^{3}/_{4}$" (273)

13$^{3}/_{16}$" (335)

20$^{5}/_{8}$" (524)

5" (127)

30" (762)

19$^{11}/_{16}$" (500)

* Recirculating installation
** Installation with exhaust air duct

Installation height above cooking surface:
24"-34" (610 mm-864 mm) for electric
27"-34" (686 mm-864 mm) for gas

measurements in inches (mm)

A	Lower flue duct
B	Upper flue duct
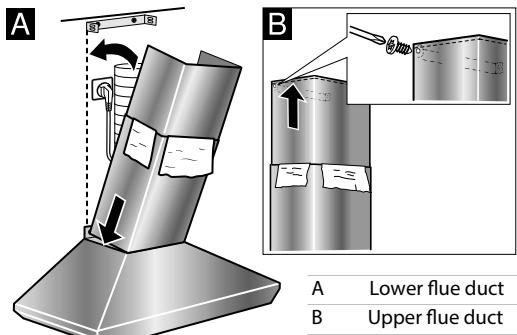
300 / 500 Series 36" Chimney Wall Hoods

36" 300 Series
Pyramid Canopy Chimney Hood
HCP36E52UC

- 300 CFM
- ENERGY STAR® Qualified
- 2 LED Lights
- Aluminum Mesh Filters
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory

36" 500 Series
Pyramid Canopy Chimney Hood
HCP56652UC

- +600 CFM
- +2 LED Lights
- +Home Connect
- Aluminum Mesh Filters
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory

36" 500 Series
Box Canopy Chimney Hood
HCB56651UC

- +600 CFM
- +2 Halogen Lights
- +Stainless Steel Filters
  with Metal Latch
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory

+Indicates a step-up feature

|	36" Pyramid Canopy 300 Series	36" Pyramid Canopy 500 Series	36" Box Canopy 500 Series
	Stainless Steel – HCP36E52UC	Stainless Steel – HCP56652UC	Stainless Steel – HCB56651UC
General Properties			
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	300 CFM	600 CFM	600 CFM
Sones	5.5 HS / 1.3 WS	10.8 HS / 2.5 WS	8.6 HS / 1.7 WS
Number of speed settings	3-stage	4-stage	4-stage
Motor location	Integrated motor in hood chimney	Integrated motor in hood chimney	Integrated motor in hood chimney
Number and type of lights	2 LED	2 LED	2 Halogen
Light lumens	500	100 – 150	360
Light color (°K)	3000	3500 – 4000	3000
Total power of the lamps (W)	13 W	3 W	80 W
Damper included	Yes	Yes	Yes
Grease filter material	Aluminum	Aluminum	Washable stainless steel
Grease filter type	Multilayer cassette	Multilayer cassette	Multilayer cassette
Technical Details			
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Plug type	No plug	No plug	No plug
Dimensions & Weight			
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	24 9/16" – 38 7/8" / 28 1/4" – 42 9/16" x 36" x 19 11/16"	25" – 39 1/2" / 29" – 43 1/2" x 36" x 19 11/16"	27 1/16" x 42 1/8" / 27 1/16" x 45 13/16" / 36" x 19 11/16"
Height of the chimney (in.)	19 9/16" – 33 7/8" / 23 1/4" – 42 9/16"	19 9/16" – 33 7/8" / 23 1/4" – 42 9/16"	25 1/2" x 40 9/16" / 25 1/2" x 44 1/4"
Required distance above cooktop / range cooking surface	Min. 24" electric / 27" gas	Min. 30" electric / 30" gas	Min. 24" electric / 27" gas
Diameter of air duct (in.) top	8"	8"	8"
Net weight (lbs)	53 lbs	53 lbs	54 lbs

Optional Accessories

HCPEXT5UC
Chimney Extension for 9–11.5 ft.
ceilings for use with HCP36E52UC
and HCP56652UC

HCBEXT5UC
Chimney Extension for 9–11.5 ft.
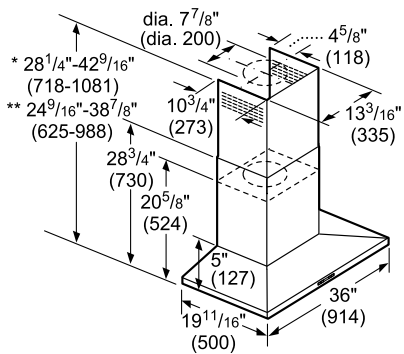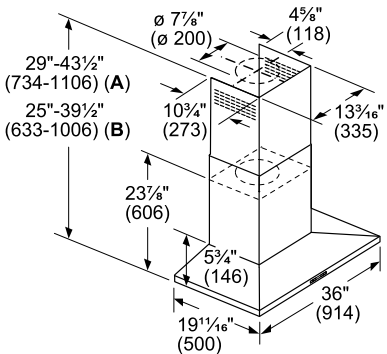ceilings for use with HCB56651UC

HCIFILTUC
Filter Kit

HCREC5UC
Recirculation Kit

300 / 500 Series 36" Chimney Wall Hoods

36" HCP36E52UC
Pyramid Canopy Chimney Hood

dia. 7 7/8" (dia. 200)
4 5/8" (118)
* 28 1/4"-42 9/16" (718-1081)
** 24 9/16"-38 7/8" (625-988)
10 3/4" (273)
13 3/16" (335)
28 3/4" (730)
20 5/8" (524)
5" (127)
36" (914)
19 11/16" (500)

* Recirculating installation
** Installation with exhaust air duct

Installation height above cooking surface:
24"-34" (610 mm-864 mm) for electric
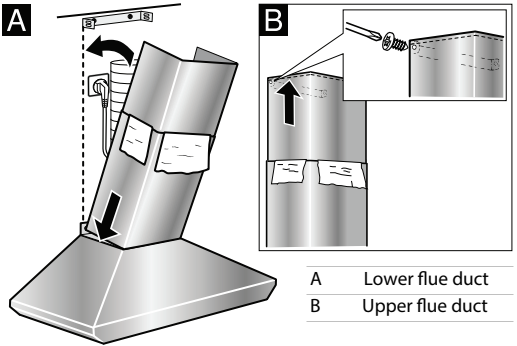27"-34" (686 mm-864 mm) for gas

measurements in inches (mm)

36" HCP56652UC
Pyramid Canopy Chimney Hood

ø 7 7/8" (ø 200)
4 5/8" (118)
29"-43½" (734-1106) (A)
25"-39½" (633-1006) (B)
10 3/4" (273)
13 3/16" (335)
23 7/8" (606)
5 3/4" (146)
36" (914)
19 11/16" (500)
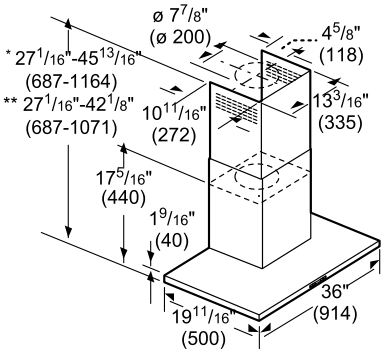
A: Recirculating installation
B: Ducted installation

Installation height above cooking surface:
30"-36" (762 mm-914 mm) to Electric
30"-36" (762 mm-914 mm) to Gas
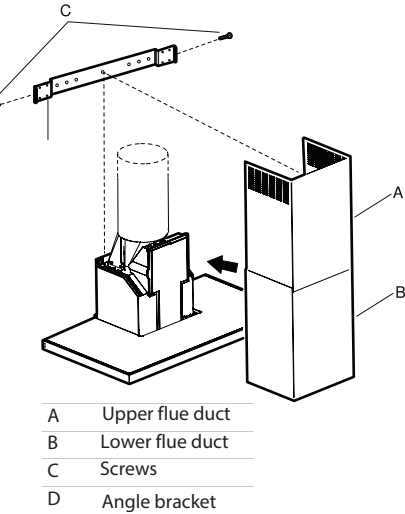
measurements in inches (mm)

A	Lower flue duct
B	Upper flue duct

36" HCB56651UC
Box Canopy Chimney Hood

ø 7 7/8" (ø 200)
4 5/8" (118)
* 27 1/16"-45 13/16" (687-1164)
** 27 1/16"-42 1/8" (687-1071)
10 11/16" (272)
13 3/16" (335)
17 5/16" (440)
1 9/16" (40)
25 1/2" x 40 9/16" / 25 1/2" x 44 1/4"
36" (914)
19 11/16" (500)

* Recirculating installation
** Ducted installation

Installation height above cooking surface:
24"-34" (610 mm-864 mm) to Electric
27"-34" (686 mm-864 mm) to Gas

measurements in inches (mm)

A	Upper flue duct
B	Lower flue duct
C	Screws
D	Angle bracket

Ventilation — 300 / 500 Series 36" Chimney Wall Hoods

800 Series 36" Chimney Wall Hood

**36" 800 Series
Pyramid Canopy Chimney Hood
HCP86641UC**

- 600 CFM
- **+** 2 Halogen Lights
- **+** Aluminum Mesh Filters
- 9 ft.–11.5 ft. Duct Cover
  Extension Accessory
- Black Stainless Steel Helps Guard
 Against Scratches and Fingerprints

+ Indicates a step-up feature

	36" Pyramid Canopy 800 Series
	Black Stainless Steel – HCP86641UC
General Properties	
Operating mode	Convertible: ducted / recirculating
Maximum CFM	600 CFM
Sones	9.9 HS / 4.56 WS
Number of speed settings	4-stage
Motor location	Integrated motor in hood chimney
Number and type of lights	2 Halogen
Light lumens	360
Light color (°K)	3000
Total power of the lamps (W)	80 W
Damper included	Yes
Grease filter material	Aluminum
Grease filter type	Multilayer cassette
Technical Details	
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug type	No plug
Dimensions & Weight	
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	24 9/16" – 38 7/8" / 28 1/4" – 42 9/16" x 36" x 19 11/16"
Height of the chimney (in.)	19 9/16" – 33 7/8" / 23 1/4" – 42 9/16"
Required distance above cooktop / range cooking surface	Min. 24" electric / 27" gas
Diameter of air duct (in.) top	8"
Net weight (lbs)	49 lbs

Optional Accessories

HCPEXT4UC
Chimney Extension for 9–11.5 ft. ceilings
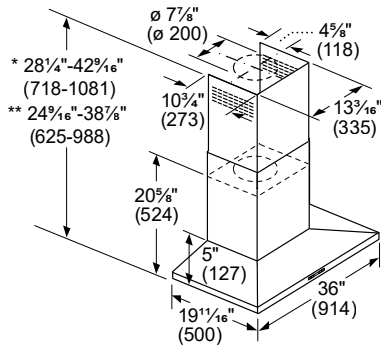for use with HCP80641UC & HCP86641UC

HCIFILTUC
Filter Kit

HCREC5UC
Recirculation Kit

800 Series 36" Chimney Wall Hood

36" Pyramid Canopy Chimney Hood

ø 7⅞"
(ø 200)

4⅝"
(118)

* 28¼"-42⁷⁄₁₆"
(718-1081)

** 24⅜"-38⅞"
(625-988)

10¾"
(273)

13⅜"
(335)

20⅝"
(524)

5"
(127)

36"
(914)

19¹¹⁄₁₆"
(500)

* Recirculating installation
** Ducted installation

Installation height above cooking surface:
24"-34" (610 mm-864 mm) to Electric
27"-34" (686 mm-864 mm) to Gas

measurements in inches (mm)

A — Lower flue duct
B — Upper flue duct

Ventilation — 800 Series 36" Chimney Wall Hoods
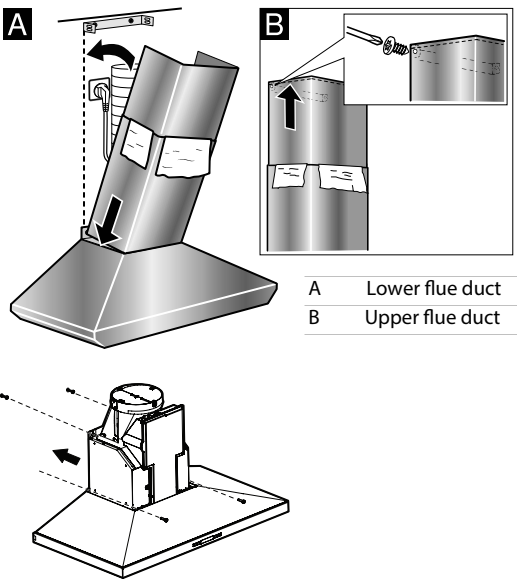
800 Series 42" Island Hood

42" 800 Series
Box Canopy Island Hood
HIB82651UC

- 600 CFM
- 4 Halogen Lights
- Stainless Steel Filters with Metal Latch
- 9 ft.–11.5 ft. Duct Cover Extension Accessory

42" Box Canopy Island Hood	
Stainless Steel – HIB82651UC	
General Properties	
Operating mode	Convertible: ducted / recirculating
Maximum CFM	600 CFM
Sones	8.7 HS / 1.9 WS
Number of speed settings	4-stage
Motor location	Integrated motor in hood chimney
Number and type of lights	4 Halogen
Light lumens	360
Light color (°K)	3000
Total power of the lamps (W)	80 W
Damper included	Yes
Grease filter material	Washable stainless steel
Grease filter type	Multilayer cassette
Technical Details	
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug type	No plug
Dimensions & Weight	
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	29 $\frac{13}{16}$" – 45 $\frac{5}{16}$" / 29 $\frac{13}{16}$" – 50 $\frac{5}{16}$" x 42 $\frac{1}{16}$" x 27"
Height of the chimney (in.)	27 $\frac{7}{16}$" – 42 $\frac{7}{8}$" / 27 $\frac{7}{16}$" – 47 $\frac{7}{8}$"
Required distance above cooktop / range cooking surface	Min. 24" electric / 30" gas
Diameter of air duct (in.) top	8"
Net weight (lbs)	110 lbs

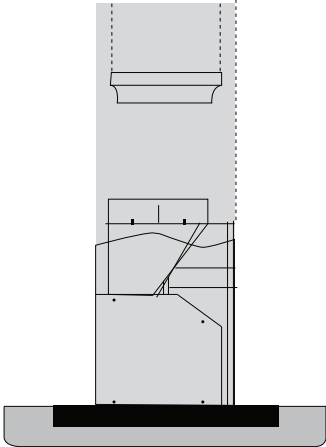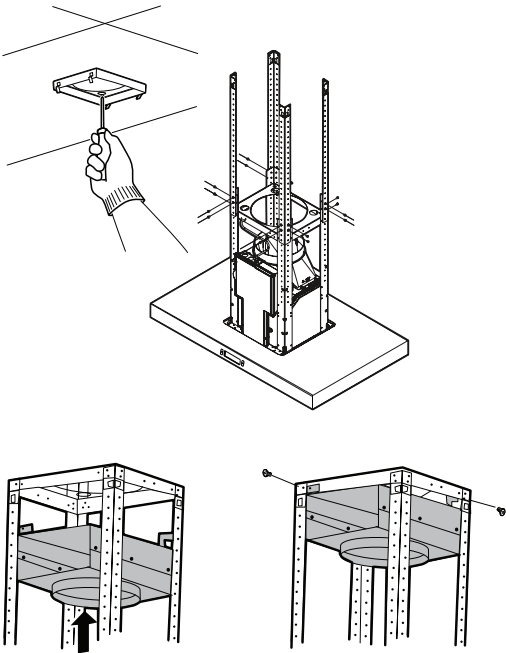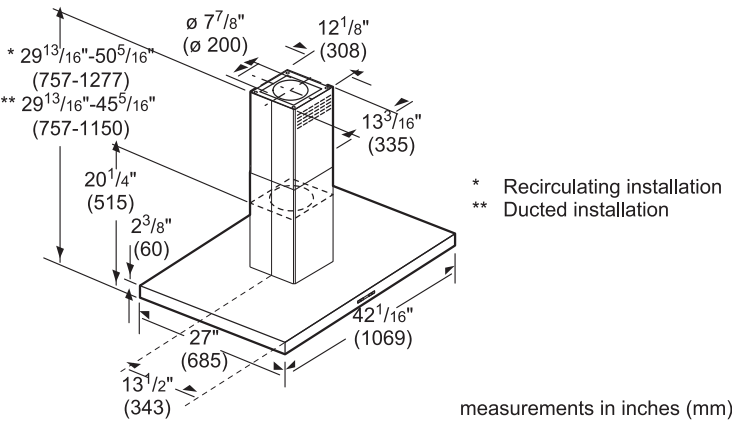| **Optional Accessories** |
|---|

HCIEXT5UC
Chimney Extension for
9–11.5 ft. ceilings for
use with HIB82651UC

HCIFILTUC
Filter Kit

HIREC5UC
Recirculation Kit for HIB82651UC

800 Series 42" Island Hood

42" Box Canopy Island Hood

* Recirculating installation
** Ducted installation

measurements in inches (mm)

1–800–944–2904 | bosch-home.com/us

500 Series Pull-Out Hoods

24" 500 Series
Pull-Out Hood
HUI54452UC

- 400 CFM
- Electronic Control
- 2 LED Lights
- Convertible: Ducted / Recirculating

30" 500 Series
Pull-Out Hood
HUI50351UC

- 300 CFM
- Electronic Control
- 2 Halogen Lights
- Convertible: Ducted / Recirculating

36" 500 Series
Pull-Out Hood
HUI56551UC

+ 500 CFM
- Electronic Control
- 2 Halogen Lights
- Convertible: Ducted / Recirculating

+ Indicates a step-up feature

	24"	30"	36"
	Stainless Steel – HUI54452UC	Stainless Steel – HUI50351UC	Stainless Steel – HUI56551UC
General Properties			
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	400 CFM	300 CFM	500 CFM
Sound Rating (HS / WS)	5.5 sones / 1.3 sones	65.3 dBA / 48 dBA	70.3 dBA / 53.8 dBA
Number of speed settings	4-stage	3-stage	3-stage
Motor location	Integrated motor in hood body	Integrated motor in hood body	Integrated motor in hood body
Number and type of lights	2 LED	2 Halogen (20 W)	2 Halogen (20 W)
Light lumens	235	320	320
Light color (°K)	3000	3000	3000
Total power of the lamps (W)	4.2 W	40 W	40 W
Damper included	Yes	Yes	Yes
Grease filter material	Aluminum	Aluminum	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette	Multilayer cassette
Technical Details			
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Plug type	120V-3 Prong	No plug	No plug
Power cord length (in.)	45 1/2"	50"	50"
Dimensions & Weight			
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	11 13/16" x 23 9/16" x 11 13/16"	11 9/16" x 29 7/8" x 11"	11 9/16" x 35 7/8" x 11"
Required distance above cooktop / range cooking surface	Min. 24" electric / 29 1/2" gas	Min. 24" electric / 29 1/2" gas	Min. 24" electric / 29 1/2" gas
Diameter of air duct (in.) top	6"	6"	6"
Diameter of air duct (in.) back	N/A	6"	6"
Net weight (lbs)	24 lbs	26 lbs	32.5 lbs

Optional Accessories

HVREC5UC
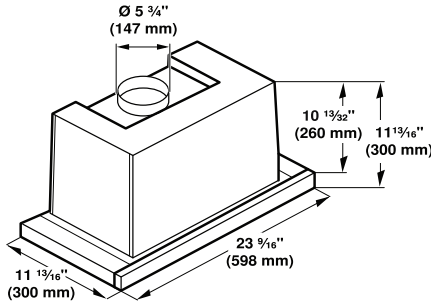Recirculation Kit for use with HUI54452UC

HUIF06UC
Recirculation Kit for use with HUI50351UC and HUI56551UC

HUIRED56UC
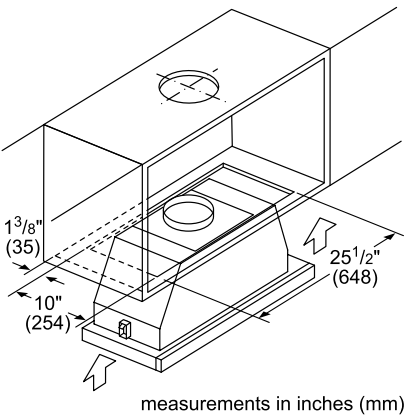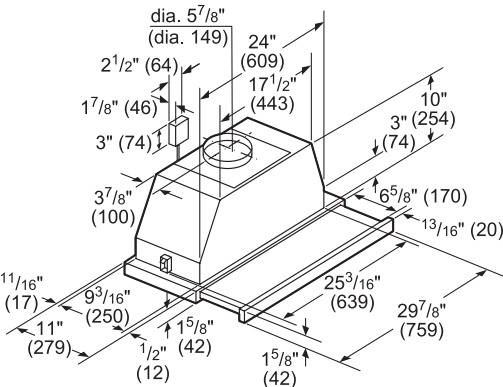CFM Reducer Kit for use with HUI56551UC; Reduces CFM to under 300
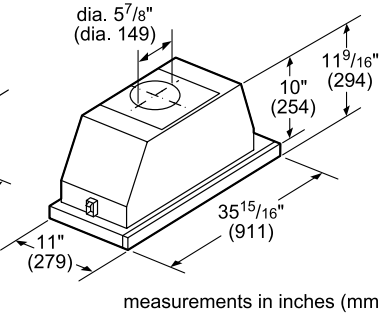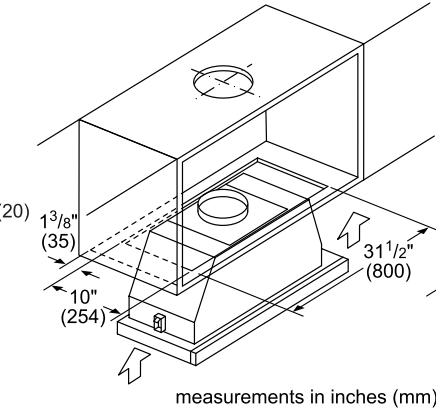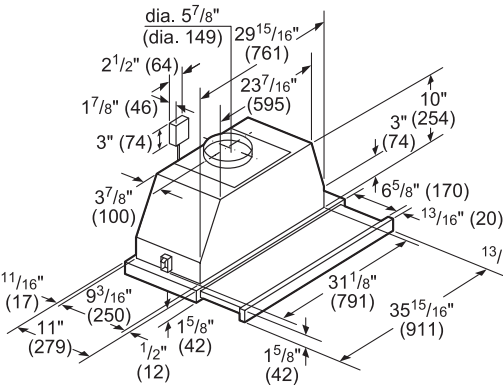
24" HUI54452UC Pull-Out Hood

Installation height above cooking surface:
24"-34" (610-864) to Electric
29 1/2"-34" (750-864) to Gas.

measurements in inches (mm)

30" HUI50351UC Pull-Out Hood

Installation height above cooking surface:
24"-34" (610-864) to Electric
29 1/2"-34" (750-864) to Gas

measurements in inches (mm)

36" HUI56551UC Pull-Out Hood

Installation height above cooking surface:
24"-34" (610-864) to Electric
29 1/2"-34" (750-864) to Gas

measurements in inches (mm)

Ventilation — 500 Series Pull-Out Hoods

300 / 500 / 800 Series 30" Under-Cabinet Wall Hoods

30" 300 Series Under-Cabinet Wall Hood DUH30152UC

- 280 CFM
- Incandescent Lights
- Aluminum Mesh Filters
- Three Power Levels

30" 500 Series Under-Cabinet Wall Hood DUH30252UC

- +400 CFM
- +Halogen Lights
- Aluminum Mesh Filters
- +Four Power Levels

30" 800 Series Under-Cabinet Wall Hood DPH30652UC

- +600 CFM
- Incandescent Lights
- Aluminum Mesh Filters
- +Professional Design

+Indicates a step-up feature

	300 Series	500 Series	800 Series
	Stainless Steel – DUH30152UC	Stainless Steel – DUH30252UC	Stainless Steel – DPH30652UC
General Properties			
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	280 CFM	400 CFM	600 CFM
Sones	N/A	5.0 HS / 1.5 WS	N/A
Number of speed settings	3-stage	4-stage	2-stage
Motor location	Integrated motor in hood body	Integrated motor in hood body	Integrated motor in hood body
Number and type of lights	2 Incandescent	2 Halogen	2 Incandescent
Light lumens	380	380	380
Light color (°K)	2700	2700	2700
Total power of the lamps (W)	80 W	100 W	80 W
Damper included	Yes	Yes	Yes
Grease filter material	Aluminum	Aluminum	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette	Multilayer cassette
Technical Details			
Watts (W)	N/A	N/A	142 W
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Plug type	No plug	No plug	No plug
Dimensions & Weight			
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	5" x 30" x 20"	5" x 30" x 20"	11" x 30" x 23"
Required distance above cooktop / range cooking surface	Min. 30" electric / 30" gas	Min. 30" electric / 30" gas	Min. 30" electric / 30" gas
Diameter of air duct (in.) top	7"	7"	8"
Diameter of air duct (in.) back	3 1/4" x 10" rectangular	3 1/4" x 10" rectangular	8"
Net weight (lbs)	42 lbs	42 lbs	34 lbs

| Optional Accessories for 300 and 500 Series Under-Cabinet Hoods	Optional Accessories for 800 Series Under-Cabinet Hood	
DHZ3002UC Replacement Charcoal Filter	DHZ3052UC Replacement Charcoal Filter	DRZ3052UC Recirculation Kit Adds 4" Height to Appliance

300 / 500 / 800 Series 30" Under-Cabinet Wall Hoods

300 / 500 Series 30" DUH30152UC & DUH30252UC Under-Cabinet Hoods
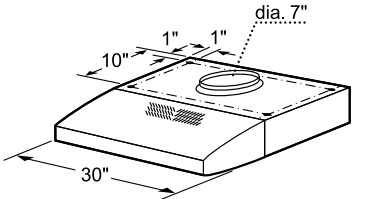
Dimensions in inches

Vertical discharge:
Use a rectangular duct 3 1/4" x 10".....


....or use a round 7" duct

Horizontal discharge:
Use a rectangular duct 3 1/4" x 10"

Recirculating (non vented ductless)

800 Series 30" DPH30652UC Under-Cabinet Hood
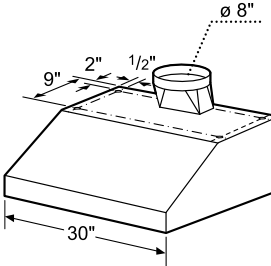
Measurements in inches
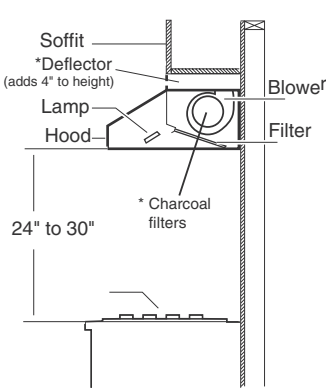
Recirculating

* Optional accessory - Ductless recirculation kit. Adds 4" to height of appliance.
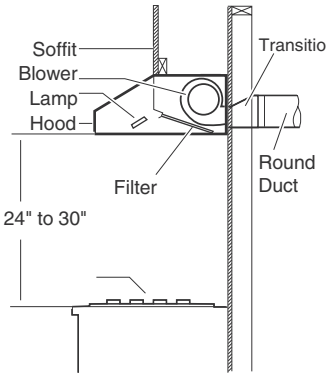
Vertical discharge
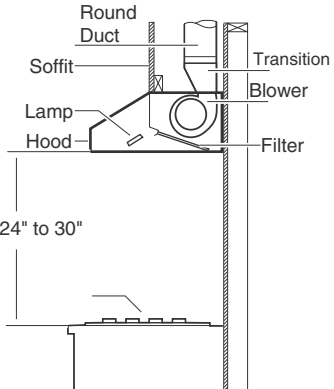
Horizontal discharge

300 / 500 / 800 Series 36" Under-Cabinet Wall Hoods

**36" 300 Series
Under-Cabinet Wall Hood
DUH36152UC**

- 280 CFM
- Incandescent Lights
- Aluminum Mesh Filters
- Three Power Levels

**36" 500 Series
Under-Cabinet Wall Hood
DUH36252UC**

- **+** 400 CFM
- **+** Halogen Lights
- Aluminum Mesh Filters
- **+** Four Power Levels

**36" 800 Series
Under-Cabinet Wall Hood
DPH36652UC**

- **+** 600 CFM
- Incandescent Lights
- Aluminum Mesh Filters
- **+** Professional Design

+ Indicates a step-up feature

	300 Series	**500 Series**	**800 Series**
	Stainless Steel – DUH36152UC	Stainless Steel – DUH36252UC	Stainless Steel – DPH36652UC
General Properties			
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	280 CFM	400 CFM	600 CFM
Sones	N/A	5.0 HS / 1.5 WS	10.8 HS / 2.5 WS
Number of speed settings	3-stage	4-stage	2-stage
Motor location	Integrated motor in hood body	Integrated motor in hood body	Integrated motor in hood body
Number and type of lights	2 Incandescent	2 Halogen	2 Halogen
Light lumens	380	380	380
Light color (°K)	2700	2700	2700
Total power of the lamps (W)	80 W	100 W	80 W
Damper included	Yes	Yes	Yes
Grease filter material	Aluminum	Aluminum	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette	Multilayer cassette
Technical Details			
Watts (W)	N/A	N/A	253 W
Volts (V)	120 V	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Plug type	No plug	No plug	No plug
Dimensions & Weight			
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	5" x 36" x 20"	5" x 36" x 20"	11" x 36" x 23"
Required distance above cooktop / range cooking surface	Min. 30" electric / 30" gas	Min. 30" electric / 30" gas	Min. 30" electric / 30" gas
Diameter of air duct (in.) top	7"	7"	8"
Diameter of air duct (in.) back	3 1/4" x 10" rectangular	3 1/4" x 10" rectangular	8"
Net weight (lbs)	41 lbs	41 lbs	34 lbs

Optional Accessories for 300 and 500 Series Under-Cabinet Hoods

DHZ3002UC
Replacement Charcoal Filter

Optional Accessories for 800 Series Under-Cabinet Hood

DHZ3052UC
Replacement Charcoal Filter

DRZ3652UC
Recirculation Kit Adds 4" Height to Appliance

300 / 500 / 800 Series 36" Under-Cabinet Wall Hoods

300 / 500 Series 30" DUH36152UC & DUH36252UC Under-Cabinet Hoods
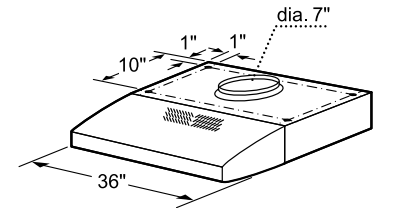
dia. 7"

Dimensions in inches

Vertical discharge:
Use a rectangular duct 3 1/4" x 10".....


....or use a round 7" duct

Horizontal discharge:
Use a rectangular duct 3 1/4" x 10"

Recirculating (non vented ductless)


800 Series 30" DPH36652UC Under-Cabinet Hood
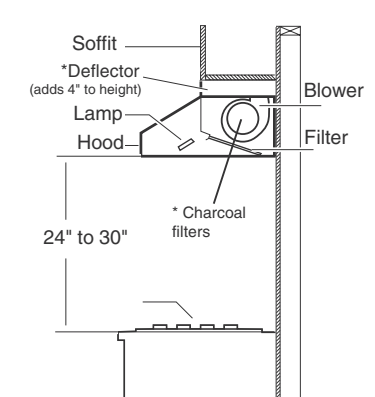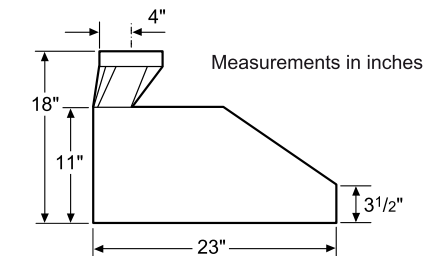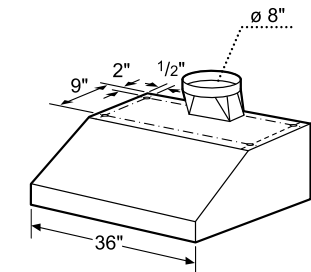
ø 8"

Measurements in inches

Recirculating
* Optional accessory - Ductless recirculation kit. Adds 4" to height of appliance.

Vertical discharge

Horizontal discharge

Ventilation — 300 / 500 / 800 Series 36" Under-Cabinet Wall Hoods
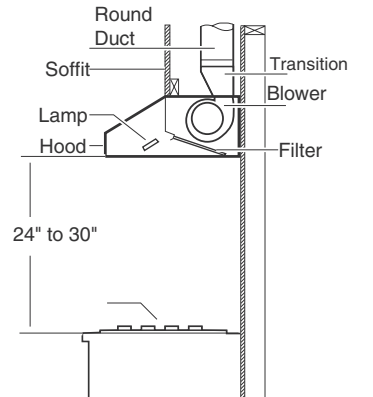
300 / 500 Series Custom Insert Hoods

300 Series
21" – HUI31451UC
500 Series
29" – DHL755BUC
Custom Insert Hoods

- 400 CFM
- 2 Halogen Lights
- Aluminum Mesh Filters
- Slide Control Switch

	300 Series	500 Series
	21" – HUI31451UC	29" – DHL755BUC
General Properties		
Operating mode	Ducted	Ducted
Maximum CFM	400 CFM	400 CFM
Number of speed settings	3-stage	3-stage
Motor location	Integrated motor in hood body	Integrated motor in hood body
Number and type of lights	2 Halogen	2 Halogen
Total power of the lamps (W)	40 W	40 W
Damper included	Yes	Yes
Grease filter material	Aluminum	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette
Technical Details		
Volts (V)	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz
Plug type	120V-3 prong	120V-3 prong
Power cord length (in.)	51"	51"
Dimensions & Weight		
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	10" x 20 3/4" x 15"	6 1/4" x 28 11/16" x 15"
Required distance above cooktop / range cooking surface	Min. 30" electric / 30" gas	Min. 30" electric / 30" gas
Diameter of air duct (in.) top	6"	6"
Net weight (lbs)	19 lbs	23 lbs

300 / 500 Series Custom Insert Hoods

21" HUI31451UC Custom Insert Hood
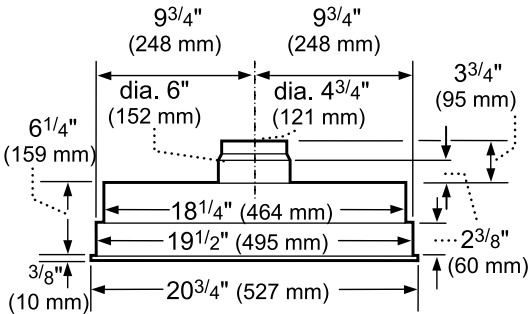
measurements in inches and mm
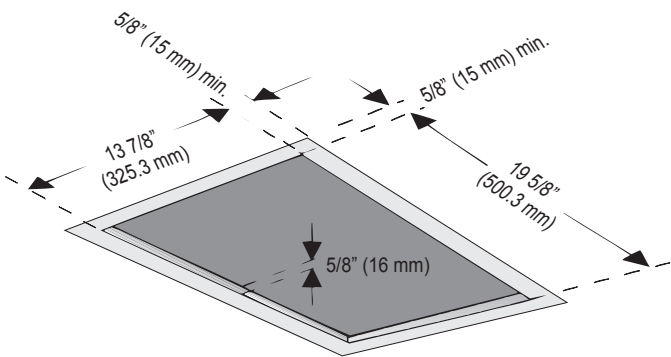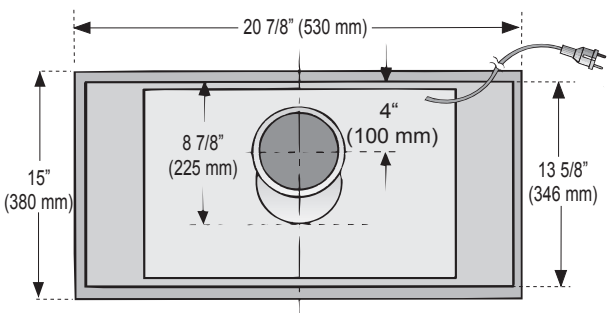
29" DHL755BUC Custom Insert Hood

800 Series Downdraft Hoods

30" – HDD80051UC

36" – HDD86051UC

**800 Series
Downdraft Hoods**

- 12" Telescopic Chimney
- 600 CFM Blower Options (Sold Separately)
- Aluminum Mesh Filters
- Three Power Levels
- Recirculation Option (Sold Separately)*

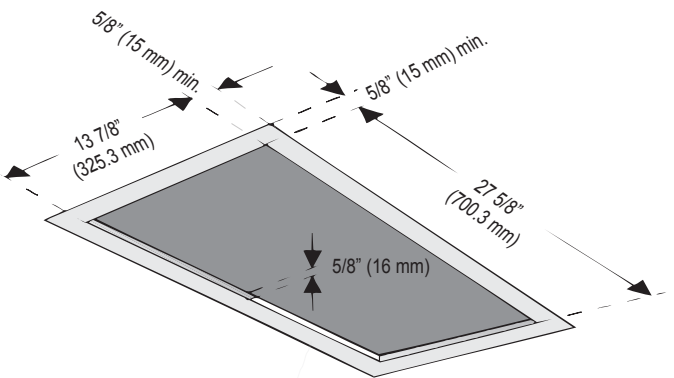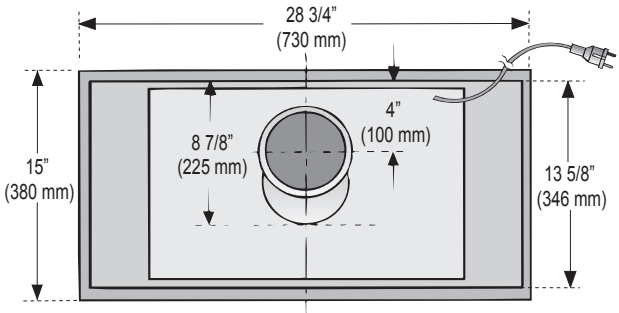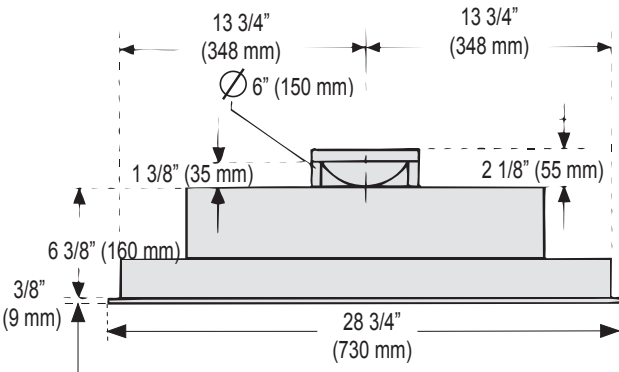|	30" Stainless Steel – HDD80051UC	36" Stainless Steel – HDD86051UC
General Properties		
Operating mode	Convertible: ducted / recirculating	Convertible: ducted / recirculating
Maximum CFM	Blower sold separately	Blower sold separately
Sones**	11.8 HS / 2.1 WS	10.3 HS / 1.4 WS
Number of speed settings	3-stage	3-stage
Motor location	External	External
Damper included	No	No
Grease filter material	Aluminum	Aluminum
Grease filter type	Multilayer cassette	Multilayer cassette
Duct direction	Front, left, right, rear, down	Front, left, right, rear, down
Optional blower required	Yes (600 CFM options sold separately)	Yes (600 CFM options sold separately)
Technical Details		
Volts (V)	120 V	120 V
Frequency (Hz)	60 Hz	60 Hz
Plug type	120V-3 prong	120V-3 prong
Power cord length (in.)	30"	30"
Dimensions & Weight		
Overall appliance dimensions (width of canopy included) (HxWxD) (in.)	29 $3/8$" x 31" x 2 $3/4$"	29 $3/8$" x 37" x 2 $3/4$"
Height of the rise (in.)	12"	12"
Diameter of air duct (in.) internal	8"	8"
Diameter of air duct (in.) external	6" or 8"	6" or 8"
Net weight (lbs)	37 lbs	42 lbs
Accessories – Required		
Blower (sold separately)	Yes	Yes
Accessories – Transitions & Blowers		
6" side / rear / downward transition	HDDSTRAN6	HDDSTRAN6
8" side / rear / downward transition	HDDSTRAN8	HDDSTRAN8
NOTE: HDDSTRAN6 or HDDSTRAN8 required for side or rear exhaust applications with inline and remote blowers.		
6" round front plate	HDDFTRAN6	HDDFTRAN6
8" round front plate	HDDFTRAN8	HDDFTRAN8
NOTE: HDDFTRAN6 or HDDFTRAN8 required for front exhaust applications with inline and remote blowers.		
Transition for rectangular duct	HDDSTRAN2	HDDSTRAN2
2' rectangular duct	HDD2RECTD	HDD2RECTD
NOTE: HDDSTRAN2 needed to attach HDD2RECTD to downdraft. For use with installation of inline or remote blower applications.		
600 CFM flexible blower	DHG602DUC	DHG602DUC
600 CFM inline blower	DHG6015NUC	DHG6015NUC
600 CFM remote blower	DHG6023RUC	DHG6023RUC

**Sound test performed as per HVI standards at independent lab.

*Recirculation kit is not compatible with gas cooktop installations with downdraft

800 Series Downdraft Hoods

30" HDD80051UC Downdraft Hood
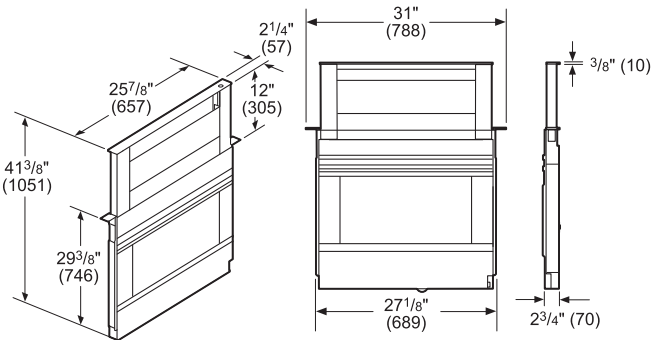
measurements in inches and (mm)

36" HDD86051UC Downdraft Hood
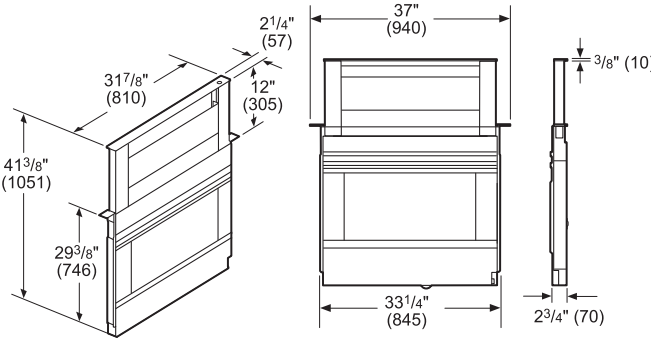
measurements in inches and (mm)

30" & 36" Downdraft Hood Clearances

Measurements in inches and (mm)

Flat countertop min. 2 3/4" (70)

Cooktop — Template 2 1/8" (54)

Countertop

Cooktop to rear wall of cabinet min. 2 3/4" (70)

Front to back inside cabinet depth

Downdraft

Rear of downdraft to rear of cabinet min. 5/8" (16)

measurements in inches and (mm)

DATA LABEL

Downdraft electrical cable is 30" long
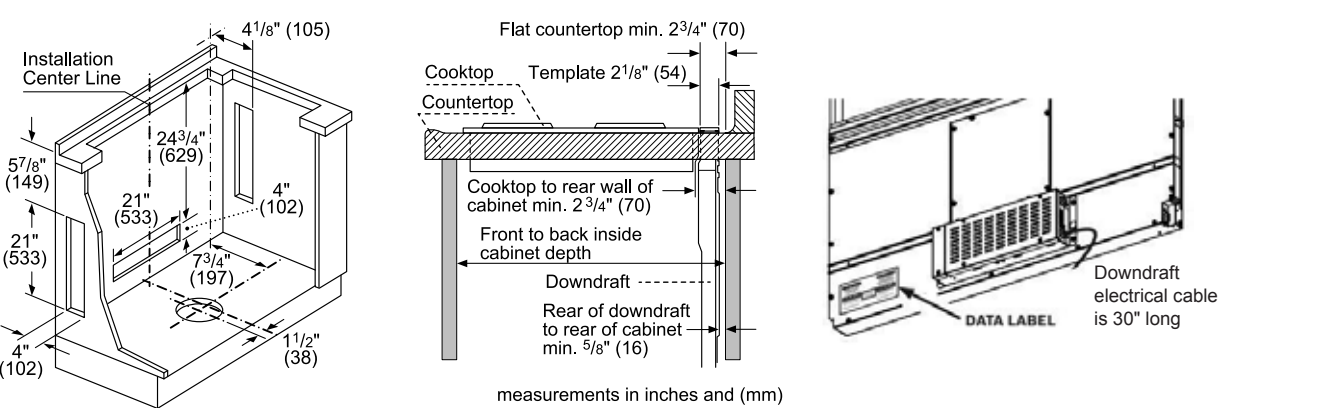
Downdraft Hood with Gas Cooktop Cutout

Template 2-1/8" (54)

Downdraft cutout width:
30" (762) is 27-1/16" (687)
36" (914) is 33-1/16" (840)

24-11/16" (628)
22-5/16" (567)
19-1/8" (486)
1-1/16" (27)

BT

MIN. 1/2" (13)

Cooktop cutout width

1-7/8" (48)
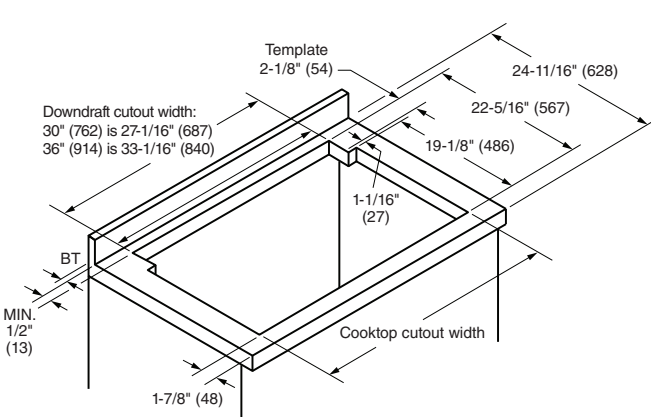
Downdraft Hood with Electric or Induction Cooktop Cutout

Template 2-1/8" (54)

Downdraft cutout width:
30" (762) is 27-1/16" (687)
36" (914) is 33-1/16" (840)

25-7/16" - 25-9/16" (646 - 649)
22-11/16" - 22-13/16" (576 - 579)
19-7/8" - 20" (505 - 508)
11/16" (17)

BT

MIN. 1/2" (13)

Cooktop cutout width

2-1/4" (57)
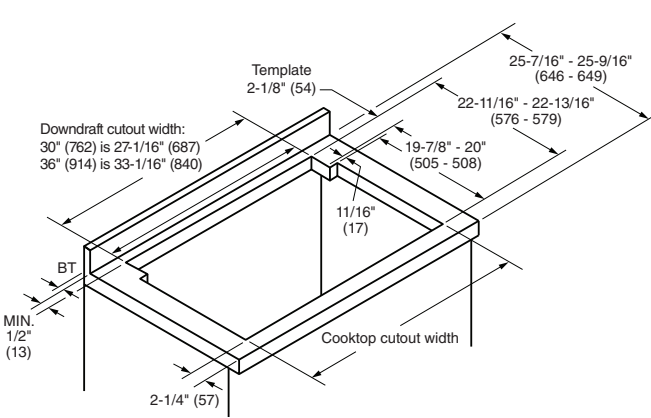
See page 102 for Downdraft Hood with Gas Rangetop Cutout

Optional Accessory for 30" Downdraft Hood	Optional Accessory for 36" Downdraft Hood	Optional Accessories for 30" and 36" Downdraft Hoods

HDD0RSP
30" Gas Cooktop Seal Kit for downdraft (required for installation with gas cooktops)

HDDTRIM30S
Trim Kit for 30" FlameSelect® gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for downdraft (required for installation with gas cooktops)

HDDTRIM36S
Trim Kit for 36" FlameSelect® gas cooktops

HDDREC5UC
Recirculation Kit (compatible with electric and induction cooktops)

HDDFILTUC
Charcoal Filter Replacement for recirculation kit

800 Series Downdraft Hoods

Inline or Remote Blower Installation – Available Blowers

Downdraft Hood with Gas Rangetop Cutout

measurements in inches (mm)

2⅛" (54) (**B**)

28¹³⁄₁₆" (732)

26³⁄₁₆" (665)

(**A**)

(**D**)

(**C**)

A: Downdraft cutout width:
30" (762) is 27¹⁄₁₆" (687)
36" (914) is 33³⁄₁₆" (840)
B: Template
C: Rangetop cutout width
D: Accessory kit required to cover seams after
installation.

DHG6015NUC
600 CFM Inline Blower

14¹⁄₈" (359 mm)

dia. 6¼" (159 mm)

3⅜" (86 mm)

9⅞" (251 mm)

12¾" (324 mm)

15½" (394 mm)

13⅜" (340 mm)

5⅞" (149 mm)

11¾" (298 mm)

measurements in inches and mm

• For use with Bosch downdrafts
• Inline blowers can be mounted
remotely to minimize blower noise
in the cooking area
• Designed to be mounted inline with the
ducting installation
• Blower is mounted on roof of exterior wall
depending on application needs
• 6" transition required

DHG602DUC
600 CFM Flexible Integral Blower

10³⁄₈" (264)

11⅝" (295)

12¾" (324)

11⅝" (295)

5⅛" (130)

7⅜" (187)

5" (127)

5¼" (133)

12¾" (324)

measurements in inches and (mm)

600 CFM flexible blower can mount to
downdraft or be used as an inline blower, and
can be rotated to exhaust downward or to sides

• Capable up to 600 CFM in performance
• Blower is able to mount to downdraft or be
used as an inline blower
• Blower can be rotated to exhaust downward
or toward sides
• Additional accessories may be required for
installation, see manual

DHG6023RUC
600 CFM Remote Blower

10⅞" (276 mm)

11⅝" (295 mm)

10⅞" (276 mm)

13½" (343 mm)

dia. 6" (152 mm)

19" (483 mm)

19½" (495 mm)

14³⁄₈" (365 mm)

16⅝" (422 mm)

measurements in inches and mm

• For use with Bosch downdrafts
• Can be mounted on the exterior of the home
to minimize noise in the cooking area
• Blower is mounted on roof of exterior wall
depending on application needs
• 6" transition required

800 Series Downdraft Hoods

Optional Accessories

HDDREC5UC
Recirculation Kit for Downdraft

15" (380)

13²⁄₄" (342)

16¹⁄₈" (408)

dia. 7¾" (dia. 200)

4³⁄₄" (119)

17³⁄₄" (450)

16" (406)

3¾" (95)

Measurements in inches and (mm)

When ducting to the
exterior is not feasible,
downdraft recirculation
kit allows filtered air
to reenter the kitchen
while cooking

• When ducting is not feasible, kit eliminates need to
exhaust outside
• Air is filtered through charcoal filter, then re-enters kitchen
• Includes recirculation module, filter and metal grille vent plate
• Designed to work with both 30" and 36" Bosch downdrafts,
HDD series
• Use with induction / electric cooktops only

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

26⁷⁄₈" (683 mm)

4¼" (108 mm)

³⁄₈" (11 mm)

measurements in inches (mm)

30" gas cooktop seal kit required for installation with
30" gas cooktops

• Includes trim, seal, metal grill, and fasteners
• Required for installation with gas cooktops

HDDTRIM30S
Trim Kit for 30" FlameSelect® Gas Cooktops

30" trim kit for installation with
30" FlameSelect® gas cooktops

• Includes trim kit and installation tool
• Required for installation with 30"
FlameSelect® gas cooktops

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit
for Downdraft

1½" (38 mm)

4¼" (108 mm)

13¾" (349 mm)

measurements in inches (mm)

Maintain performance of Bosch downdraft
recirculation kit with timely replacement of charcoal
filter to capture and filter odors

• Replacement charcoal filter for HDDREC5UC
recirculation kit
• Quality charcoal filter effectively captures and
filters odors
• Replace charcoal filter every 6 months depending
on usage

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

32⁷⁄₈" (835 mm)

4¼" (108 mm)

³⁄₈" (11 mm)

measurements in inches (mm)

36" gas cooktop seal kit required for installation with
36" gas cooktops

• Includes trim, seal, metal grill, and fasteners
• Required for installation with gas cooktops

HDDTRIM36S
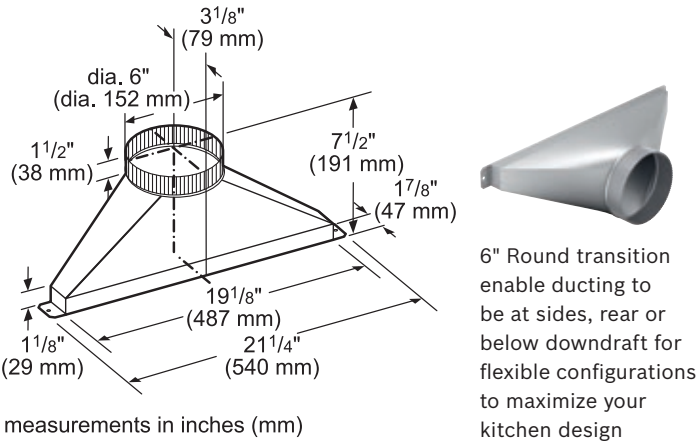### Trim Kit for 36" FlameSelect® Gas Cooktops

36" trim kit for installation with
36" FlameSelect® gas cooktops

• Includes trim kit and installation tool
• Required for installation with 36"
FlameSelect® gas cooktops
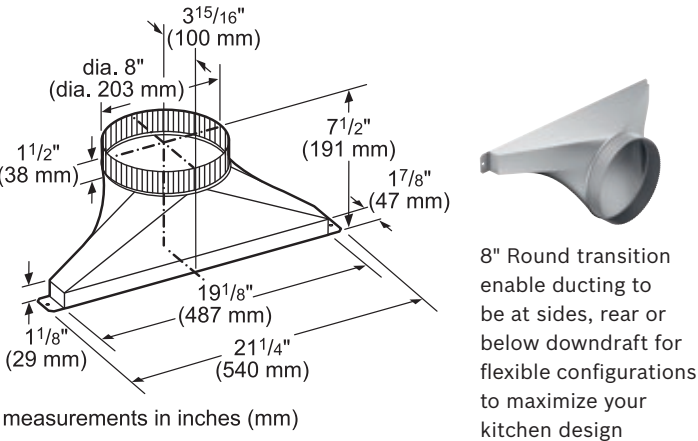
800 Series Downdraft Hoods

Inline or Remote Blower Installation – Side / Rear / Downward Transitions

HDDSTRAN6
6" Side / Rear / Downward Transition for Downdraft

3$^1/8$"
(79 mm)

dia. 6"
(dia. 152 mm)

1$^1/2$"
(38 mm)

7$^1/2$"
(191 mm)

1$^7/8$"
(47 mm)

1$^1/8$"
(29 mm)

19$^1/8$"
(487 mm)

21$^1/4$"
(540 mm)

measurements in inches (mm)

6" Round transition enable ducting to be at sides, rear or below downdraft for flexible configurations to maximize your kitchen design

- Flexible transition design allows for left, right, rear or downward venting
- Front rough-in plate may be used with a 6" round duct or elbow
- Ability to use with DHG6015NUC inline or DHG6023RUC remote blowers
- Some blower positions may need deeper cabinets. See installation guide

HDDSTRAN8
8" Side / Rear / Downward Transition for Downdraft

3$^{15}/16$"
(100 mm)

dia. 8"
(dia. 203 mm)

1$^1/2$"
(38 mm)

7$^1/2$"
(191 mm)

1$^7/8$"
(47 mm)

19$^1/8$"
(487 mm)

1$^1/8$"
(29 mm)

21$^1/4$"
(540 mm)

measurements in inches (mm)

8" Round transition enable ducting to be at sides, rear or below downdraft for flexible configurations to maximize your kitchen design

- Flexible transition design allows for left, right, rear or downward venting
- For DHG602DUC flexible downdraft blower used as inline installation
- Some blower positions may need deeper cabinets. See installation guide

NOTE: HDDSTRAN6 or HDDSTRAN8 required for side, rear or downward exhaust applications with inline and remote blowers.

800 Series Downdraft Hoods

Inline or Remote Blower Installation – Round Front Downdraft Plates

HDDFTRAN6
6" Round Front Plate for Downdraft

dia. 5$^7/8$"
(dia. 149 mm)

12$^3/4$"
(324 mm)

1"
(27 mm)

12$^3/4$"
(324 mm)

measurements in inches (mm)

6" Front rough-in plate enable ducting to be at front of downdraft, for use with inline and remote blower applications

- Front rough-in plate design allows for front venting
- Front rough-in plate may be used with a 6" round duct or elbow
- Ability to use with DHG6015NUC inline or DHG6023RUC remote blowers

HDDFTRAN8
8" Round Front Plate for Downdraft

dia. 7$^7/8$"
(dia. 200 mm)

12$^3/4$"
(324 mm)

1"
(27 mm)

12$^3/4$"
(324 mm)

measurements in inches (mm)

8" Front rough-in plate enable ducting to be at front of downdraft, for use with inline and remote blower applications
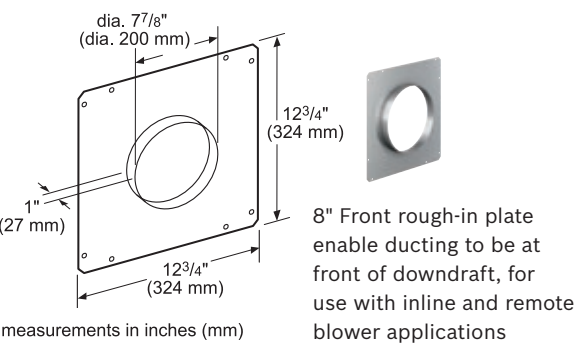
- Front rough-in plate design allows for front venting
- Front rough-in plate may be used with a 8" round duct or elbow
- For DHG602DUC flexible downdraft blower used as inline installation

NOTE: HDDFTRAN6 or HDDFTRAN8 front plate required for front exhaust applications with inline and remote blowers.

Inline or Remote Blower Installation – Transition for Rectangular Duct for Downdraft

HDDSTRAN2
Transition for Rectangular Duct for Downdraft

21$^1/4$"
(540 mm)

19$^3/8$"
(491 mm)

1$^1/8$"
(29 mm)

1$^7/8$"
(48 mm)

measurements in inches (mm)
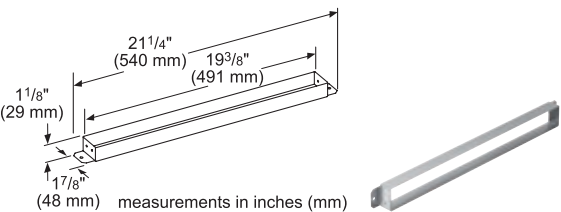
Rectangular duct transition required to connect 2' rectangular duct to downdraft

Inline or Remote Blower Installation – 2' Rectangular Duct for Downdraft

HDD2RECTD
2' Rectangular Duct Downdraft
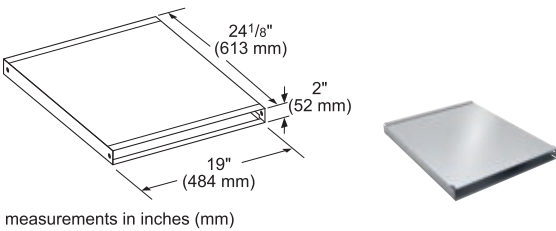
24$^1/8$"
(613 mm)

2"
(52 mm)

19"
(484 mm)

measurements in inches (mm)

2' Rectangular duct can be used as extension to exhaust through a cabinet or wall while maximizing cabinet storage space

- Duct can be used as an extension to exhaust through a cabinet or wall
- May be attached to sides or rear of downdraft housing
- HDDRECTRN transition needed to connect HDD2RECTD to downdraft housing
- For use with remote or inline blowers

800 Series Downdraft Hoods

Flexible Blower Installation – Front Exhaust Example
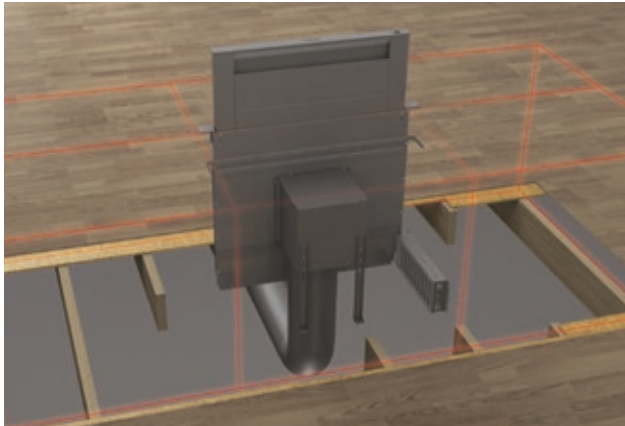
Application

- Flexible blower attached can rotate for left, right or downward discharge
- Front downward application with flexible blower
- Requires space under floor line for ductwork*
- Can be used with optional Recirculation Kit, sold separately
- Elbow, ductwork, blower support structure frame not included

Required Blower

measurements in inches and (mm)

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

Optional Accessories

HDDREC5UC
Recirculation Kit for Downdraft

When ducting to the exterior is not feasible, downdraft recirculation kit allows filtered air to reenter the kitchen while cooking

Measurements in inches and (mm)

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit for Downdraft

Maintain performance of Bosch downdraft recirculation kit with timely replacement of charcoal filter to capture and filter odors

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

30" gas cooktop seal kit required for installation with 30" gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

*For only front downward ducting applications, electrical panel must be remotely mounted. Electrical panel can still be remotely mounted in other exhaust configurations if desired. Electrical panel interconnect cable length is 5-ft. long.

800 Series Downdraft Hoods

Flexible Blower Installation – Front Exhaust with Flexible Blower Used as an Inline Option Example
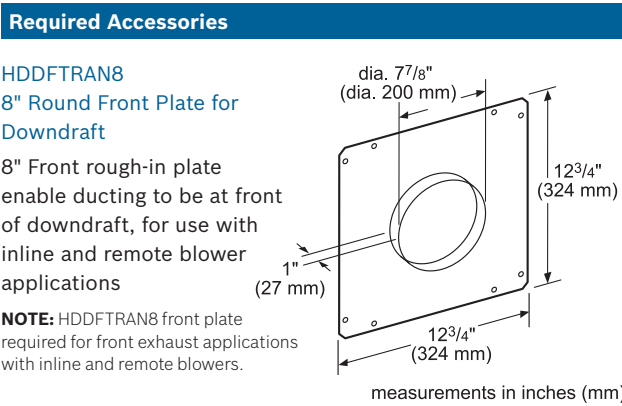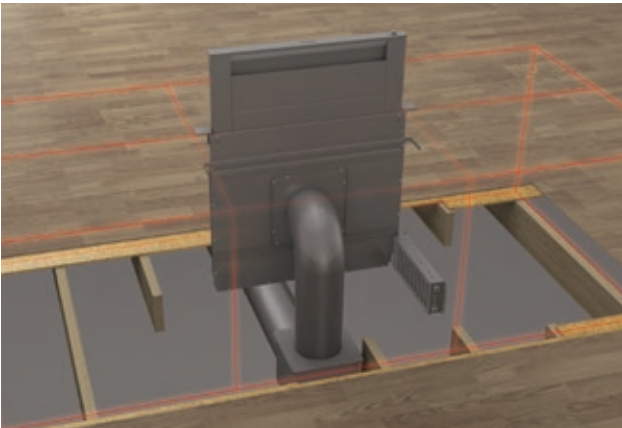
Application

- Side exhaust with flexible blower used as inline option if ducting is more convenient with this configuration
- Requires at least 18" of clearance to fit the blower and transition
- Blower must be accessible for maintenance
- Elbow, ductwork, blower support structure frame not included

Required Accessories

HDDFTRAN8
8" Round Front Plate for Downdraft

8" Front rough-in plate enable ducting to be at front of downdraft, for use with inline and remote blower applications

NOTE: HDDFTRAN8 front plate required for front exhaust applications with inline and remote blowers.

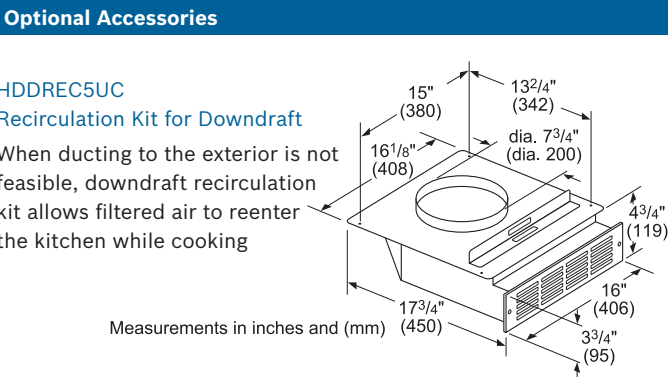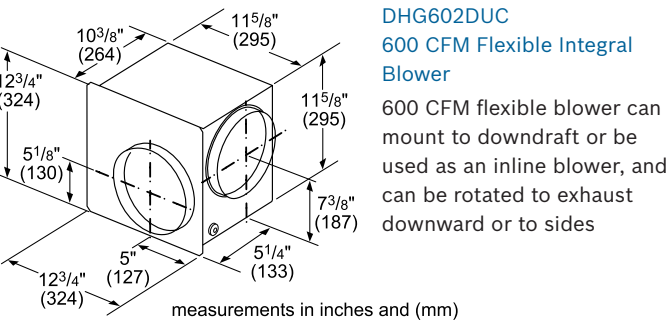measurements in inches (mm)

Required Blower

measurements in inches and (mm)

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

Optional Accessories

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

30" gas cooktop seal kit required for installation with 30" gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

NOTE: Some applications may require deeper cabinets. Side and rear exhaust require at least 18" of clearance to fit the blower and / or ductwork. Refer to installation instructions.

1–800–944–2904 | bosch-home.com/us

800 Series Downdraft Hoods

Flexible Blower Installation – Side Exhaust Example
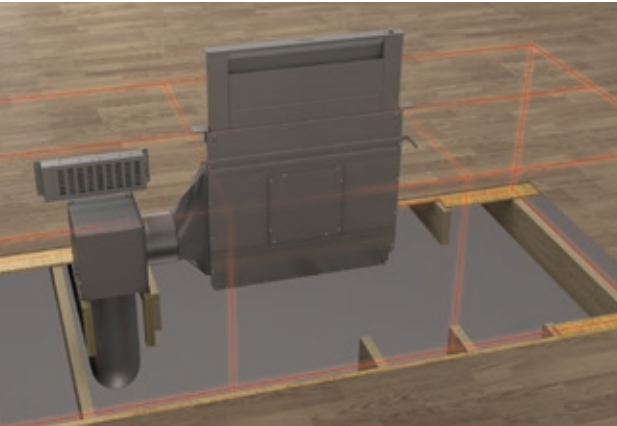
Left Side Exhaust

Right Side Exhaust

Application

- Side exhaust option if ducting is more convenient with this configuration
- Requires at least 18" of clearance to fit the blower and transition
- Can be used with optional Recirculation Kit, sold separately
- Elbow, ductwork, blower support structure frame not included

Required Blower

measurements in inches and (mm)

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

Optional Accessories

HDDREC5UC
Recirculation Kit for Downdraft

When ducting to the exterior is not feasible, downdraft recirculation kit allows filtered air to reenter the kitchen while cooking

Measurements in inches and (mm)

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit for Downdraft

Maintain performance of Bosch downdraft recirculation kit with timely replacement of charcoal filter to capture and filter odors

HDD0RSP
**30" Gas Cooktop Seal Kit for Downdraft**

30" gas cooktop seal kit required for installation with 30" gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

Required Accessories

HDDSTRAN8
8" Side / Rear / Downward Transition for Downdraft

8" Round transition enable ducting to be at sides, rear or below downdraft for flexible configurations to maximize your kitchen design

NOTE: HDDSTRAN8 side / rear / downward transition required for side, rear or downward exhaust applications with inline and remote blowers.
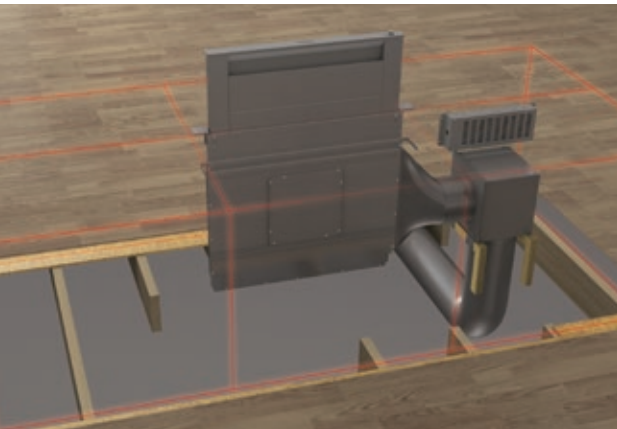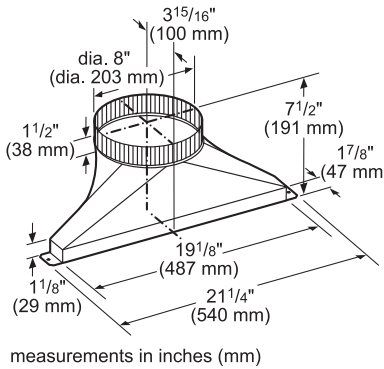

measurements in inches (mm)

NOTE: Some applications may require deeper cabinets. Side and rear exhaust require at least 18" of clearance to fit the blower and / or ductwork. Refer to installation instructions.

800 Series Downdraft Hoods

Flexible Blower Installation – Side Exhaust with Slim 2' Rectangular Duct Example

Application

- Side exhaust option if ducting is more convenient with this configuration
- A slim 2' rectangular duct is available to place flexible blower in areas such as unused corner in island or peninsula applications
- Can be used with optional Recirculation Kit, sold separately
- Elbow, ductwork, blower support structure frame not included

Required Blower

measurements in inches and (mm)

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

Required Accessories

HDD2RECTD
2' Rectangular Duct Downdraft

2' Rectangular duct can be used as extension to exhaust through a cabinet or wall while maximizing cabinet storage space

measurements in inches (mm)

HDDSTRAN2
Transition for Rectangular Duct for Downdraft

Rectangular duct transition required to connect 2' rectangular duct to downdraft

measurements in inches (mm)

HDDSTRAN8
8" Side / Rear / Downward Transition for Downdraft

8" Round transition enable ducting to be at sides, rear or below downdraft for flexible configurations to maximize your kitchen design
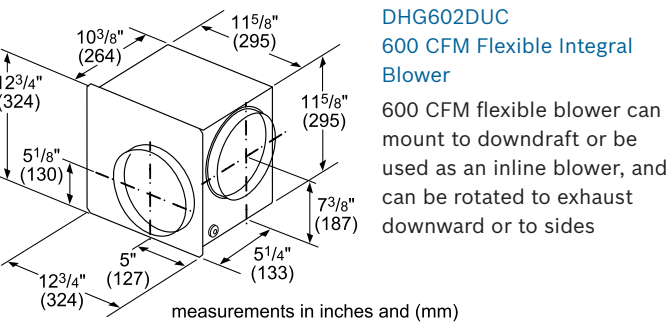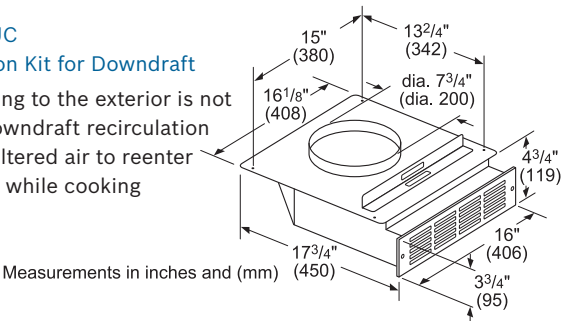
NOTE: HDDSTRAN8 side / rear / downward transition required for side, rear or downward exhaust applications with inline and remote blowers.

measurements in inches (mm)

Optional Accessories

HDDREC5UC
Recirculation Kit for Downdraft

When ducting to the exterior is not feasible, downdraft recirculation kit allows filtered air to reenter the kitchen while cooking

Measurements in inches and (mm)

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit for Downdraft

Maintain performance of Bosch downdraft recirculation kit with timely replacement of charcoal filter to capture and filter odors

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

30" gas cooktop seal kit required for installation with 30" gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

NOTE: Some applications may require deeper cabinets. Side and rear exhaust require at least 18" of clearance to fit the blower and / or ductwork. Refer to installation instructions.

800 Series Downdraft Hoods

Flexible Blower Installation – Rear Exhaust Example
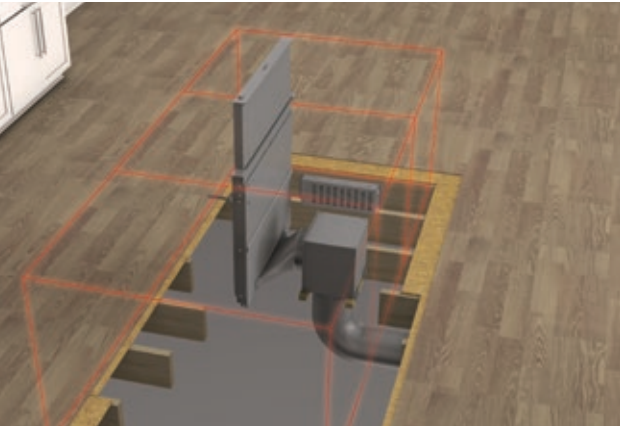
Application

- Rear exhaust option is possible if ducting is more convenient with this configuration
- Requires at least 18" of clearance to fit the blower and transition
- Blower must be accessible for maintenance
- Can be used with optional Recirculation Kit, sold separately
- Elbow, ductwork, blower support structure frame not included

Required Blower

measurements in inches and (mm)

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

Required Accessories

HDDSTRAN8
8" Side / Rear / Downward Transition for Downdraft

8" Round transition enable ducting to be at sides, rear or below downdraft for flexible configurations to maximize your kitchen design

NOTE: HDDSTRAN8 side / rear / downward transition required for side, rear or downward exhaust applications with inline and remote blowers.

measurements in inches (mm)

Optional Accessories

HDDREC5UC
Recirculation Kit for Downdraft

When ducting to the exterior is not feasible, downdraft recirculation kit allows filtered air to reenter the kitchen while cooking

Measurements in inches and (mm)

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit for Downdraft

Maintain performance of Bosch downdraft recirculation kit with timely replacement of charcoal filter to capture and filter odors

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

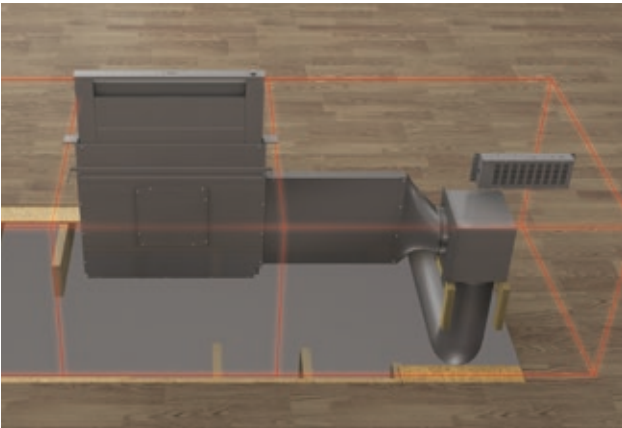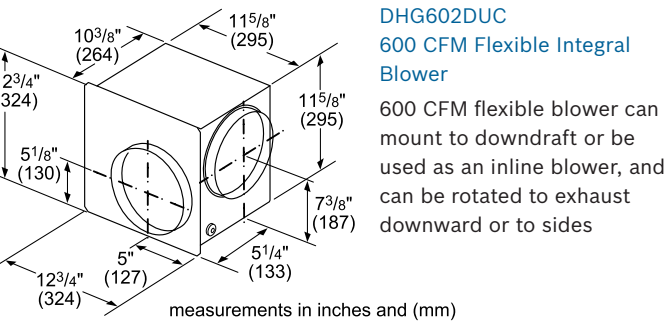30" gas cooktop seal kit required for installation with 30" gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

NOTE: Some applications may require deeper cabinets. Side and rear exhaust require at least 18" of clearance to fit the blower and / or ductwork. Refer to installation instructions.

800 Series Downdraft Hoods

Flexible Blower Installation – Downward Exhaust Example
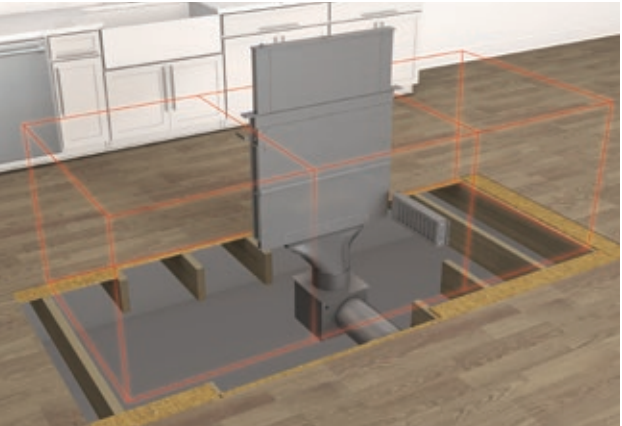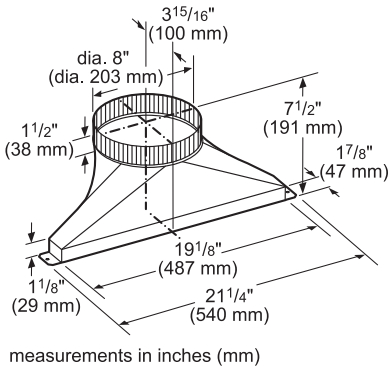
Application

- Downward exhaust option if ducting is more convenient with this configuration
- Requires at least 18" of clearance to fit the blower and transition
- Can be used with optional Recirculation Kit, sold separately
- Elbow, ductwork, blower support structure frame not included
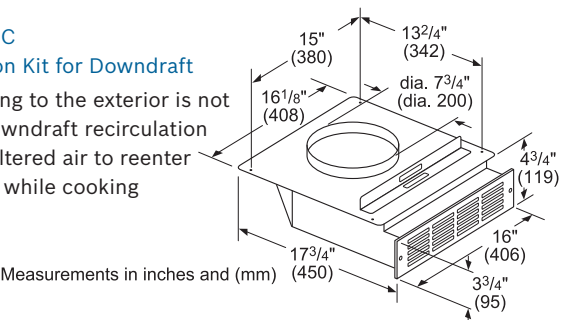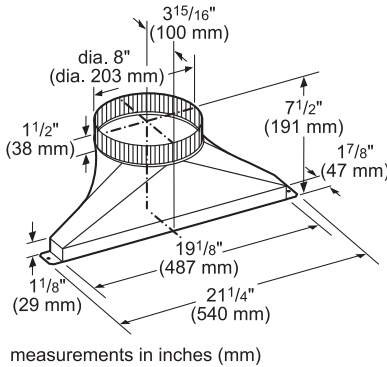- Blower must be accessible for maintenance
- Can also be installed with inline and remote blowers

Required Blower

measurements in inches and (mm)

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

Required Accessories

HDDSTRAN8
8" Side / Rear / Downward Transition for Downdraft

8" Round transition enable ducting to be at sides, rear or below downdraft for flexible configurations to maximize your kitchen design

NOTE: HDDSTRAN8 side / rear / downward transition required for side, rear or downward exhaust applications with inline and remote blowers.

measurements in inches (mm)

Optional Accessories

HDDREC5UC
Recirculation Kit for Downdraft

When ducting to the exterior is not feasible, downdraft recirculation kit allows filtered air to reenter the kitchen while cooking

Measurements in inches and (mm)

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit for Downdraft

Maintain performance of Bosch downdraft recirculation kit with timely replacement of charcoal filter to capture and filter odors

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

30" gas cooktop seal kit required for installation with 30" gas cooktops

HDD6RSP
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

Ventilation — 800 Series Downdraft Hoods

800 Series Downdraft Hoods

Flexible Blower Installation – Recirculation Example
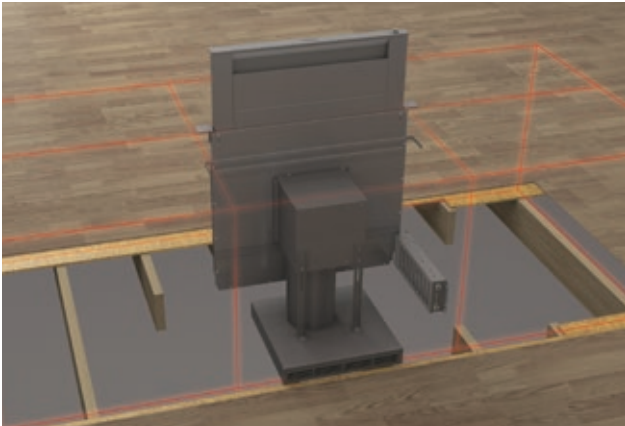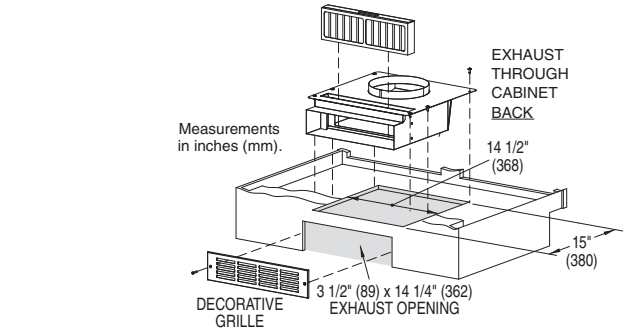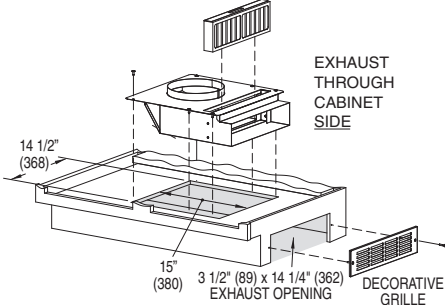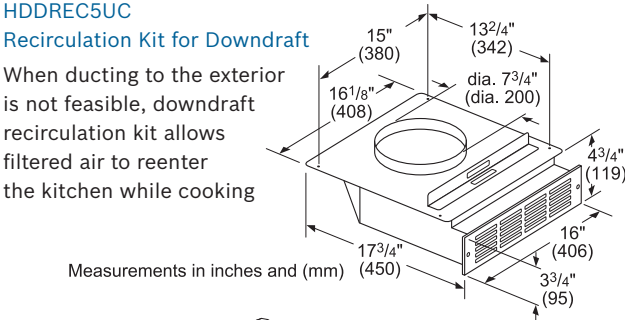
Application

- Allows for non-ducted downdraft installation by eliminating the need to exhaust to the exterior of the home
- Mount to toe kick or base of a cabinet and attach directly to flexible blower
- Recirculation module and metal grill vent plate placement can be rotated for flexible exhaust placement
- Elbow, ductwork, blower support structure frame not included

Required Blower

DHG602DUC
600 CFM Flexible Integral Blower

600 CFM flexible blower can mount to downdraft or be used as an inline blower, and can be rotated to exhaust downward or to sides

10³/₈" (264)
11⁵/₈" (295)
12³/₄" (324)
11⁵/₈" (295)
5¹/₈" (130)
7³/₈" (187)
5" (127)
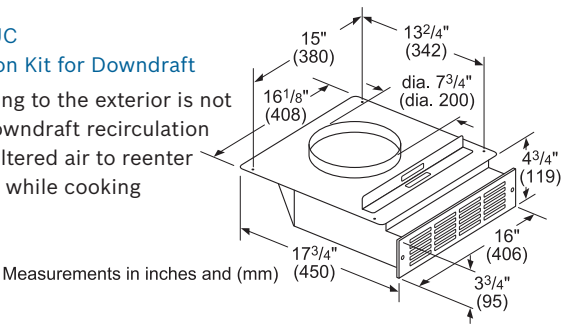5¹/₄" (133)
12³/₄" (324)

measurements in inches and (mm)

Required Accessories

HDDREC5UC
Recirculation Kit for Downdraft

When ducting to the exterior is not feasible, downdraft recirculation kit allows filtered air to reenter the kitchen while cooking

15" (380)
13²/₄" (342)
16¹/₈" (408)
dia. 7³/₄" (dia. 200)
4³/₄" (119)
17³/₄" (450)
16" (406)
3³/₄" (95)

Measurements in inches and (mm)

EXHAUST THROUGH CABINET SIDE
14 1/2" (368)
15" (380)
3 1/2" (89) x 14 1/4" (362) EXHAUST OPENING
DECORATIVE GRILLE

EXHAUST THROUGH CABINET BACK
Measurements in inches (mm).
14 1/2" (368)
15" (380)
DECORATIVE GRILLE
3 1/2" (89) x 14 1/4" (362) EXHAUST OPENING

Optional Accessories

HDDFILTUC
Charcoal Filter Replacement for Recirculation Kit for Downdraft

Maintain performance of Bosch downdraft recirculation kit with timely replacement of charcoal filter to capture and filter odors

HDD0RSP
30" Gas Cooktop Seal Kit for Downdraft

30" gas cooktop seal kit required for installation with 30" gas cooktops

**HDD6RSP**
36" Gas Cooktop Seal Kit for Downdraft

36" gas cooktop seal kit required for installation with 36" gas cooktops

Simply Connected Ventilation

Bosch chimney hoods with Home Connect™ offer intuitive connectivity, designed to help you take control of your day, in your own way:

Home Connect

∧ 30" Chimney Hood HCP50652UC | 36" Chimney Hood HCP56652UC

Cooktop-Hood Control, Enables you to control your Wi-Fi synced Bosch cooktop and hood at the touch of a button. Program your hood to automatically start the fan when you start cooking, customize a lighting design, change the fan speed from your smart device and more.

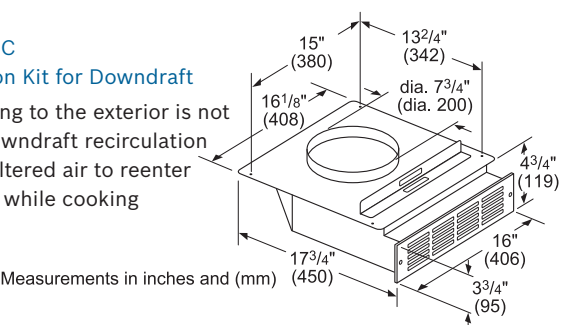**Remote Diagnostics**, Remote diagnostics allows for more efficient service solutions and the ultimate peace of mind. Smart support, smart solutions—all within an app.

Voice Control, Connect with your smart home. Use your voice assistant to bring the convenience of hands-free operation to your connected hood.

Customize Settings, Personalize appliance settings such as lighting design, fan speed, shut-off timer, and filter tracking to your needs, all through the Home Connect™ app.

Notifications, Optional push notifications alert you to when it is time to clean your grease filter or change your charcoal filter (for recirculated models).

Online Shop, Shop the accessories available for your cooktop with a link to the Bosch online shop.

Pair with a Bosch Home Connect™ Induction Cooktop. See pages 20 and 22 for compatible models.

1–800–944–2904 | bosch-home.com/us

Dishwashers

From legendary quiet performance to the promise of sparkling clean dishes, Bosch dishwashers deliver a lasting quality you've come to trust and expect. Now, with all new drying technologies, your dishwasher delivers the ultimate clean and the ultimate dry. Patented CrystalDry™ technology transforms moisture into heat to get dishes, including plastics, 60% drier* and AutoAir® automatically opens the door at the end of the drying cycle to let moisture escape and fresh air circulate for better drying results.** Discover how Bosch dishwashers are built to handle whatever life throws its way.

*Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry™ on combined household load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry®. Drying performance may vary by dish type.

**Compared to Bosch Dishwashers with PureDry®.

100 Series Dishwashers

100 Series
*SHE3AR7_UC
*SHX3AR7_UC

5

2

6

- 50 dBA
- 6 Cycles / 2 Options
- Racks with Manual Height Adjustment

100 Series
*SHEM3AY5_N

5

2

6

- 50 dBA
- Anti-fingerprint (SHEM3AY55N)
+ Utility Rack

+ Indicates a step-up feature
* Multiple colors available. See color chips to fill in missing digit.

	100 Series	100 Series
	Recessed Handle – SHE3AR7_UC Bar Handle – SHX3AR7_UC	Recessed Handle – SHEM3AY5_N
General Properties		
Number of wash cycles / options	6 / 2	6 / 2
dBA	50	50
Drying system	PureDry®	PureDry®
Third rack	No	Yes (Utility Rack)
Rack adjustability	Manual	Manual
Tub material	Stainless steel / polypropylene	Stainless steel / polypropylene
Control type	Buttons	Buttons
Concealed water heating element	Yes	Yes
Leak protection system	24/7 Overflow Protection	24/7 Overflow Protection
NSF®-certified* sanitize option	Yes	Yes
Water softener	No	No
Five-level wash	Yes	Yes
ChildLock	Yes (recessed handle model only)	Yes
TFT display	No	No
InfoLight®	No	No
Special features	50 dBA, 24/7 Overflow Protection, Anti-fingerprint (SHE3AR75UC & SHX3AR75UC), Detergent Tray	Anti-fingerprint (SHEM3AY55N), Utility Rack
Efficiency and Capacity		
Water usage per cycle	3.2	3.2
Energy efficiency class	Tier 1	Tier 1
ENERGY STAR® qualified	Yes	Yes
Total annual energy / water consumption	269 kWh / 688 g	269 kWh / 688 g
Number of place settings	14	14
Technical Data		
Watts (W)	1400 W	1400 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz	12 A / 120 V / 60 Hz
Power cord full length	67"	67"
Power cord install length from edge of unit when facing the door (in)**	Left – 45" Right – 50"	Left – 45" Right – 50"
Minimum water pressure (lb / sin)	15	15
Length outlet hose (in)	90 1/2"	90 1/2"
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 22 9/16"	33 7/8" x 23 9/16" x 22 9/16"
Required cutout size (HxWxD) (in)	33 7/8" x 24" x 24"	33 7/8" x 24" x 24"
Adjustable feet	Yes	Yes
Net weight (lbs)	69 / 71 lbs	76 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers.
**September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit # SMZEPCC1UC.

Optional Accessories				
SMZPCJB1UC Junction Box	SGZ1010UC Drain Hose Extension 76 3/4"	SMZ5000 Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket	SMZ4000UC DoubleFlex Silverware Basket	SMZEPCC1UC Edge Protector + Power Cord Clip Install Kit

100 Series Dishwashers
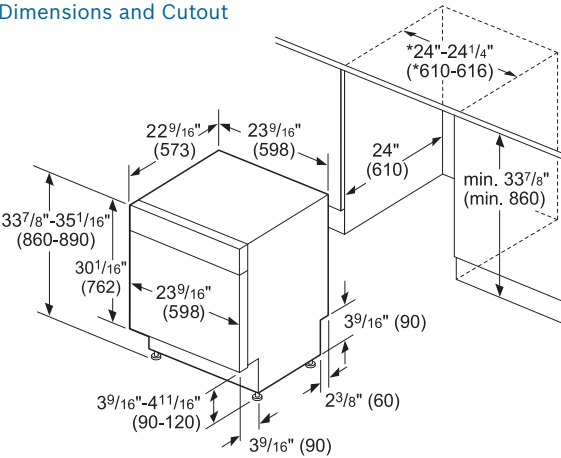
Dimensions and Cutout

*23⁵/₈" (600) without decor strips   measurements in inches (mm)

Plumbing

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 90 1/2" (230 cm) and can be extended to a maximum of 168 1/2" (428 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Included Parts & Accessories

Included:
Drain hose (packed in upper rack)

Power cord (3-prong plug)

Toe-kick

Example of Hardwire Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

3-prong power cord included

Water and Electrical Locations

A: Front view
B: Drain hose
C: Electrical Power Cord: length shown according to Installation Instructions
D: Inlet
E: Drain
F: Electrical

The electrical power cord and drain connections are in the rear of the appliance. The inlet is in the front. Extension for drain hose available as accessory. Junction Box for hard wired connection available as an accessory.

measurements in inches (mm)

100 Series Dishwashers

5	100 Series
	*SHXM4AY5_N
	+ 48 dBA
2	• Anti-fingerprint (SHXM4AY55N)
	+ 3rd Rack
6	**+** InfoLight®
	+ 3-Level RackMatic®
4	Black Stainless Steel

+ Indicates a step-up feature
***** Multiple colors available. See color chips to fill in missing digit.

| 100 Series	
	Bar Handle – SHXM4AY5_N
General Properties	
Number of wash cycles / options	5 / 4
dBA	48
Drying system	PureDry®
Third rack	Standard 3rd rack
Rack adjustability	3-Level RackMatic®
Tub material	Stainless steel / polypropylene
Control type	Buttons
Concealed water heating element	Yes
Leak protection system	24/7 Overflow Protection
NSF®-certified* sanitize option	Yes
Water softener	No
Five-level wash	Yes
ChildLock	No
TFT display	No
InfoLight®	Yes
Special features	3rd Rack, InfoLight®, Anti-fingerprint (SHXM4AY55N)
Efficiency and Capacity	
Water usage per cycle	3.2
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy / water consumption	269 kWh / 688 g
Number of place settings	15
Technical Data	
Watts (W)	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door (in)**	Left – 45" Right – 50"
Minimum water pressure (lb / sin)	15
Length outlet hose (in)	90 1/2"
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 22 9/16"
Required cutout size (HxWxD) (in)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight (lbs)	76 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers.
**September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit # SMZEPCC1UC.

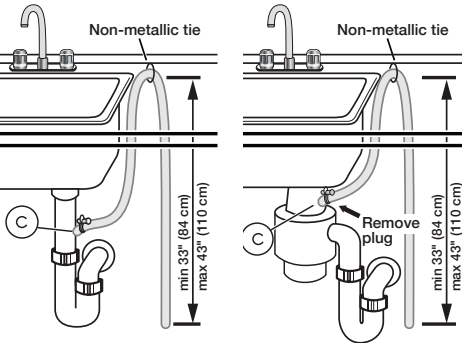| **Optional Accessories**				
SMZPCJB1UC Junction Box	SGZ1010UC Drain Hose Extension 76 3/4"	SMZ5000 Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket	SMZ4000UC DoubleFlex Silverware Basket	SMZEPCC1UC Edge Protector + Power Cord Clip Install Kit

Dimensions and Cutout

*23⁵/₈" (600) without decor strips   measurements in inches (mm)

Plumbing

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 90 1/2" (230 cm) and can be extended to a maximum of 168 1/2" (428 cm).
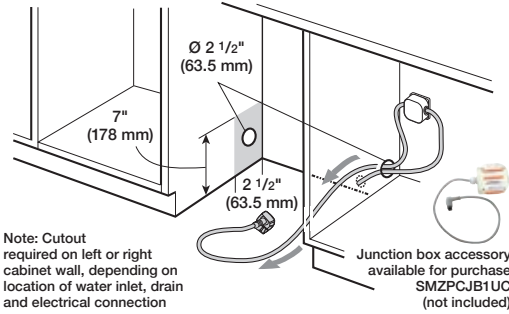
Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.
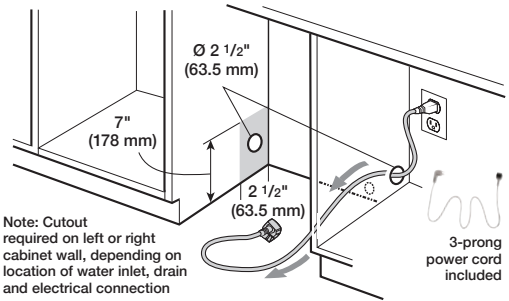
Included Parts & Accessories

Included:
Drain hose (packed in upper rack)
Power cord (3-prong plug)
Toe-kick

Example of Hardwire Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

3-prong power cord included

Water and Electrical Locations

A: Front view
B: Drain hose
C: Electrical Power Cord: length shown according to Installation Instructions
D: Inlet
E: Drain
F: Electrical

The electrical power cord and drain connections are in the rear of the appliance. The inlet is in the front. Extension for drain hose available as accessory. Junction Box for hard wired connection available as an accessory.

measurements in inches (mm)

Dishwashers — 300 Series

300 Series Dishwashers

5 300 Series
*SHEM63W5_N
*SHSM63W5_N
2 SHXM63W55N
SHVM63W53N
6 +44 dBA
+Standard 3rd Rack
+FlexSpace™ Tines
+PrecisionWash®
+16 Place Settings
+24/7 AquaStop®

300 Series
SHXM63WS5N
+Water Softener
+Touch Control

+Indicates a step-up feature
* Multiple colors available. See color chips to fill in missing digit.

	300 Series	300 Series
	Recessed Handle – SHEM63W5_N Scoop Handle – SHSM63W5_N Bar Handle – SHXM63W55N Custom Panel – SHVM63W53N	Bar Handle – SHXM63WS5N
General Properties		
Number of wash cycles / options	5 / 4	5 / 4
dBA	44	44
Drying system	PureDry®	PureDry®
Third rack	Standard 3rd rack	Standard 3rd rack
Rack adjustability	RackMatic®	RackMatic®
Tub material	Stainless steel	Stainless steel
Control type	Buttons	Touch control
Concealed water heating element	Yes	Yes
Leak protection system	24/7 AquaStop®	24/7 AquaStop®
NSF®-certified* sanitize option	Yes	Yes
Water softener	No	Yes
Five-level wash	Yes	Yes
ChildLock	Yes (recessed handle model only)	No
InfoLight®	Yes (except recessed handle model)	Yes
Special features	InfoLight®, Extra Dry option	Water softener, InfoLight®, Extra Dry option
Efficiency and Capacity		
Water usage per cycle	3.5	3.5
Energy efficiency class	Tier 1	Tier 1
ENERGY STAR® qualified	Yes	Yes
Total annual energy / water consumption	269 kWh / 623.5 g	269 kWh / 623.5 g
Number of place settings	16	16
Technical Data		
Watts (W)	1440 W	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz	12 A / 120 V / 60 Hz
Power cord full length	67"	67"
Power cord install length from edge of unit when facing the door (in)**	Left – 45" Right – 56"	Left – 45" Right – 56"
Minimum water pressure (lb / sin)	14	14
Length outlet hose (in)	79"	79"
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4" (Custom panel D: 23 1/16")	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes	Yes
Net weight (lbs)	91 / 91 / 91 / 88 lbs	95 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers.
**September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit # SMZEPCC1UC.

300 Series Dishwashers

Dimensions and Cutout

Custom Panel – Dimensions and Cutout

* measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm).
This dishwasher can accept custom door panel weights ranging from 7 to 24 lbs; however, the dishwasher comes from the factory ready for custom panel door weights from 11 to 18 lbs. If you plan on using a door panel that is not 11 to 18 lbs. please contact customer service at (800) 944-2904.
** 24" (610 mm) wide panel may be used depending on cabinet design
Note: Refer to installation template for mounting hardware locations
measurements in inches (mm)

Plumbing

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.
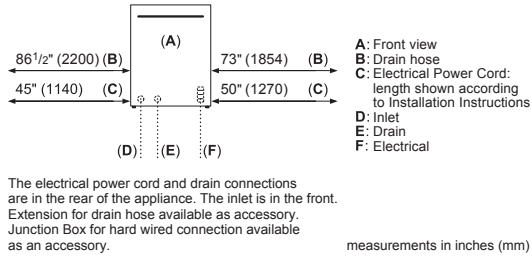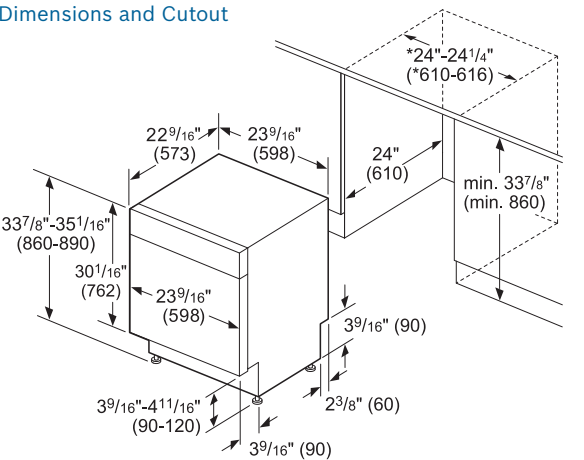
Example of Hardwire Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

3-prong power cord included

Water and Electrical Locations

A: Front view
B: Drain hose
C: Electrical Power Cord: length shown according to Installation Instructions
D: Inlet
E: Drain
F: Electrical

All connections are at the rear of the appliance. Extension for drain hose available as accessory. Junction Box for hard wired connection available as an accessory.

Measurements in inches (mm)

Included Parts & Accessories

Included:
Pre-connected drain hose
Toe-kick
Power cord (3-prong plug)

Optional Accessories					
SMZPCJB1UC Junction Box	SMZSH002UC Bosch Dishwasher Water Supply Hose	SGZ1010UC Drain Hose Extension 76 3/4"	SMZ1007UC Stainless Steel Straight Bosch Bar Handle (for custom panel models)	SMZ5002UC Anti-Tarnish Silverware Cassette	SGZ9091UC Softener Salt (4.4 lbs; for water softener models)

SMZ5000
Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket
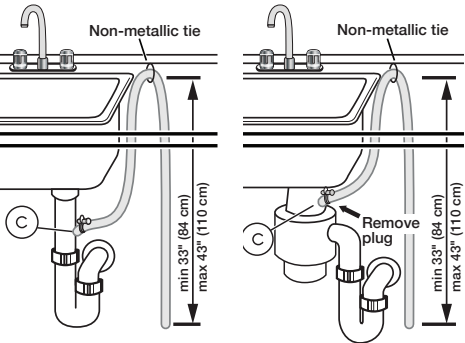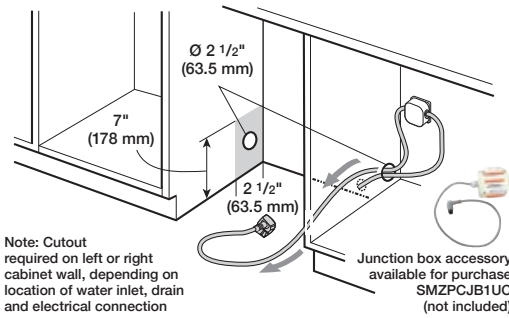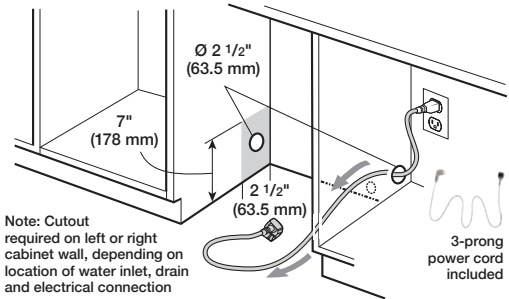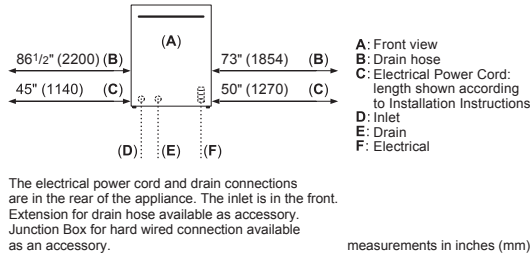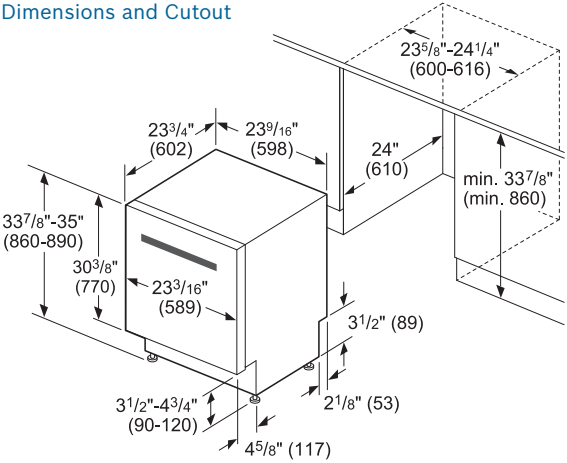
SMZEPCC1UC
Edge Protector + Power Cord Clip Install Kit

1–800–944–2904 | bosch-home.com/us

500 Series Dishwashers

5	**500 Series**
2	*SHPM65Z5_N
6	SHXM65Z55N

- 44dBA
- +Pocket Handle Design
- +Flexible 3rd Rack
- +EasyGlide™ Rack System Upper Rack
- AutoAir® Drying Option

+Indicates a step-up feature
* Multiple colors available. See color chips to fill in missing digit.

500 Series	
Pocket Handle – SHPM65Z5_N	
Bar Handle – SHXM65Z55N	

General Properties	
Number of wash cycles / options	5 / 5
dBA	44
Drying system	AutoAir® option
Third rack	Flexible 3rd rack
Rack adjustability	RackMatic®
Tub material	Stainless steel
Control type	Buttons
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
NSF®-certified* sanitize option	Yes
Water softener	No
Five-level wash	Yes
ChildLock	No
TFT display	No
InfoLight®	Yes
Special features	InfoLight®, AutoAir® option

Efficiency and Capacity	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy / water consumption	269 kWh / 623.5 g
Number of place settings	16

Technical Data	
Watts (W)	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door (in)**	Left – 45" Right – 56"
Minimum water pressure (lb / sin)	14
Length outlet hose (in)	79"

Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 $7/8$" x 23 $9/16$" x 23 $3/4$"
Required cutout size (HxWxD) (in)	33 $7/8$" x 23 $5/8$" x 24"
Adjustable feet	Yes
Net weight (lbs)	91 lbs

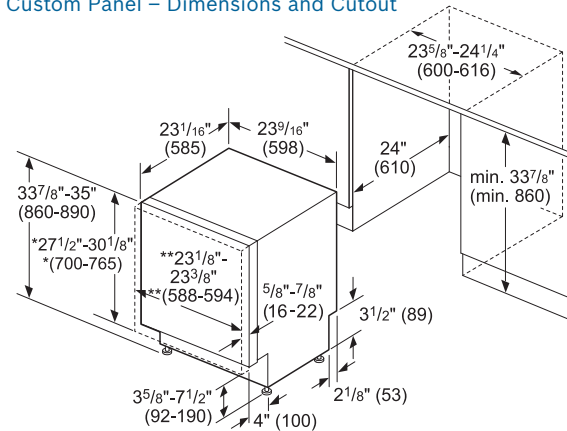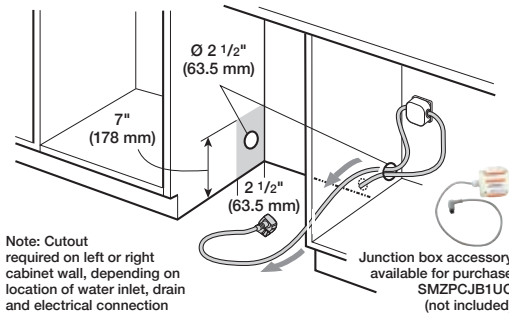*Certification to NSF/ANSI Standard 184 for residential dishwashers.
**September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit # SMZEPCC1UC

Optional Accessories					
SMZPCJB1UC Junction Box	SMZSH002UC Bosch Dishwasher Water Supply Hose	SGZ1010UC Drain Hose Extension 76 $3/4$"	SMZ5000 Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket	SMZ5002UC Anti-Tarnish Silverware Cassette	SMZEPCC1UC Edge Protector + Power Cord Clip Install Kit

500 Series Dishwashers
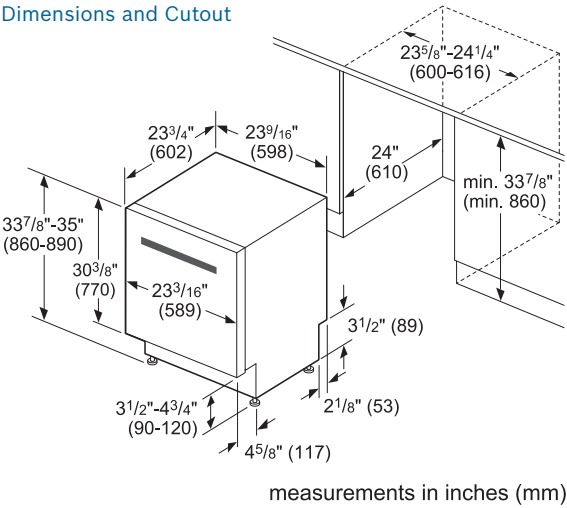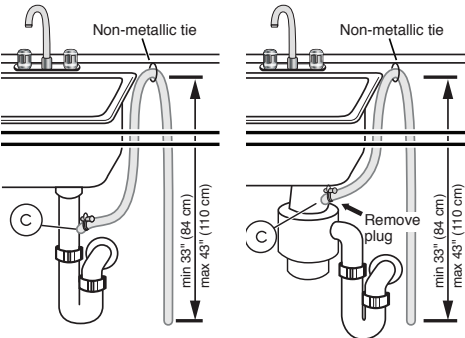
Dimensions and Cutout

measurements in inches (mm)

Plumbing

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Included Parts & Accessories

Included:
Protective guard to help protect cabinetry
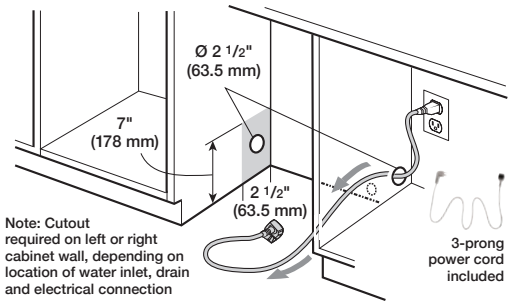Pre-connected drain hose
Toe-kick
Power cord (3-prong plug)

Example of Hardwire Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

3-prong power cord included

Water and Electrical Locations

A: Front view
B: Drain hose
C: Electrical Power Cord: length shown according to Installation Instructions
D: Inlet
E: Drain
F: Electrical

All connections are at the rear of the appliance. Extension for drain hose available as accessory. Junction Box for hard wired connection available as an accessory.

Measurements in inches (mm)

800 Series Dishwashers

800 Series
*SHEM78Z5_N
*SHPM78Z5_N
*SHXM78Z5_N
SHVM78Z53N

5	
2	
6	+42 dBA
	+Touch Control Technology
	+6 Cycles / 5 Options
4	• CrystalDry™ Drying

Black Stainless Steel**

800 Series Premium
SHPM88Z75N
SHXM88Z75N
SHVM88Z73N
+40 dBA
+MyWay® Rack

+Indicates a step-up feature
* Multiple colors available. See color
  chips to fill in missing digit.
**Black Stainless Steel available only on
  pocket handle and bar handle models

800 Series	800 Series Premium
Recessed Handle – SHEM78Z5_N Pocket Handle – SHPM78Z5_N Bar Handle – SHXM78Z5_N Custom Panel – SHVM78Z53N	Pocket Handle – SHPM88Z75N Bar Handle – SHXM88Z75N Custom Panel – SHVM88Z73N
General Properties	
Number of wash cycles / options	6 / 5	6 / 6
dBA	42	40
Drying system	CrystalDry™ option	CrystalDry™ option
Third rack	Flexible 3rd rack	MyWay® Rack
Rack adjustability	RackMatic®	RackMatic®
Tub material	Stainless steel	Stainless steel
Control type	Touch control	Touch control
Concealed water heating element	Yes	Yes
Leak protection system	24/7 AquaStop®	24/7 AquaStop®
NSF®-certified* sanitize option	Yes	Yes
Water softener	No	No
Five-level wash	Yes	Yes
ChildLock	Yes (recessed handle model only)	No
InfoLight®	Yes (except recessed handle model)	Yes
Special features	Speed60®	InfoLight®, Speed60®
Efficiency and Capacity		
Water usage per cycle	3.5	3.5
ENERGY STAR® qualified	Yes, Tier 1	Yes, Tier 1
Total annual energy / water consumption	269 kWh / 623.5 g	269 kWh / 623.5 g
Number of place settings	16	16
Technical Data		
Watts (W)	1440 W	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz	12 A / 120 V / 60 Hz
Power cord full length	67"	67"
Power cord install length from edge of unit when facing the door (in)**	Left – 45" Right – 56"	Left – 45" Right – 56"
Minimum water pressure (lb / sin)	14	14
Length outlet hose (in)	79"	79"
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in) (adjustable feet)	33 7/8" x 23 9/16" x 23 3/4" (Custom panel D: 23 1/16")	33 7/8" x 23 9/16" x 23 3/4" (Custom panel D: 23 1/16")
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"	33 7/8" x 23 5/8" x 24"
Net weight (lbs)	102 / 102 / 102 / 99 lbs	116 / 116 / 113 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers.
**September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher
  accessory kit # SMZEPCC1UC

Optional Accessories				
SMZPCJB1UC Junction Box	SMZSH002UC Bosch Dishwasher Water Supply Hose	SGZ1010UC Drain Hose Extension 76 3/4"	SMZ5002UC Anti-Tarnish Silverware Cassette	SMZEPCC1UC Edge Protector + Power Cord Clip Install Kit

800 Series Dishwashers

Dimensions and Cutout

measurements in inches (mm)

Custom Panel – Dimensions and Cutout

* measured from the bottom edge of the countertop panel thickness recommended 3/4" (20 mm).
  This dishwasher can accept custom door panel weights ranging from 7 to 24 lbs; however, the dishwasher comes from the factory ready for custom panel door weights from 11 to 18 lbs. If you plan on using a door panel that is not 11 to 18 lbs. please contact customer service at (800) 944-2904.
** 24" (610 mm) wide panel may be used depending on cabinet design
Note: Refer to installation template for mounting hardware locations

measurements in inches (mm)

Plumbing

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Example of Hardwire Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

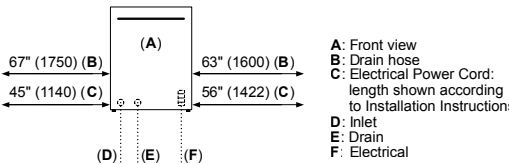Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection
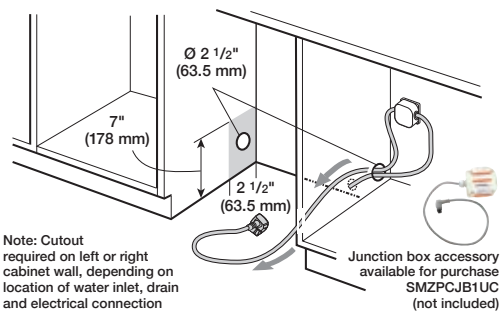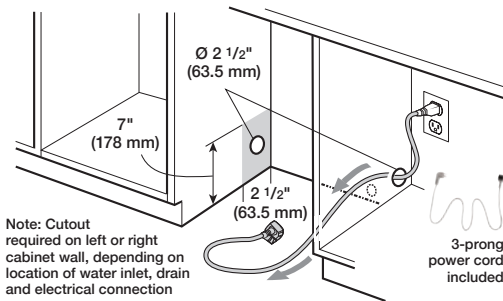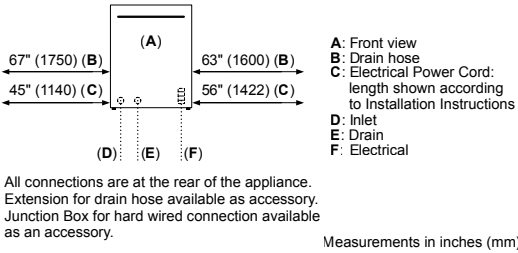
3-prong power cord included

Water and Electrical Locations

A: Front view
B: Drain hose
C: Electrical Power Cord: length shown according to Installation Instructions
D: Inlet
E: Drain
F: Electrical

All connections are at the rear of the appliance. Extension for drain hose available as accessory. Junction Box for hard wired connection available as an accessory.

Measurements in inches (mm)

Included Parts & Accessories

Included:
Pre-connected drain hose
Toe-kick
Power cord (3-prong plug)

Optional Accessories Continued				
SMZCD200UC Flexible 3rd Rack	SMZ1007UC Stainless Steel Bosch Dishwasher Bar Handle	SMZ5000 Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket		SMZ4026 (Small) SMZ5400 (Large) Silverware Insert for MyWay® Rack

800 Series Dishwasher

800 Series with Home Connect™
SHEM78ZH5N

• 42 dBA
• Flexible 3rd Rack
+ Home Connect™
• CrystalDry™

Home Connect

+ Indicates a step-up feature

General Properties	**800 Series with Home Connect™**
	Recessed Handle – SHEM78ZH5N
Number of wash cycles / options	6 / 6
dBA	42
Drying system	CrystalDry™ option
Third rack	Flexible 3rd rack
Rack adjustability	RackMatic®
Tub material	Stainless steel
Control type	Touch control
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Water softener	No
Five-level wash	Yes
ChildLock	No
InfoLight®	No
Special features	Home Connect™ (WiFi enabled)
Efficiency and Capacity	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy / water consumption	269 kWh / 623.5 g
Number of place settings	16
Technical Data	
Watts (W)	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz
Power cord length – Install length from corner of unit	67" 45"
Minimum water pressure (lb / sin)	14
Length outlet hose (in)	79"
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes
Net weight (lbs)	102 lbs

800 Series Dishwasher

Dimensions and Cutout

*24"–24 1/4"
*(610–616)

22 7/16"
(570)

23 9/16"
(598)

24"
(610)

min. 34 1/8"
(min. 867)

34 1/8"-36 1/2"
(867-927)

30 5/16"
(770)

23 3/16"
(589)

3 1/2" (89)

3 3/4"-6 1/2"
(95-165)

2 1/16" (53)

4 5/8" (117)

*23 5/8" (600) without decor strips   measurements in inches (mm)

Plumbing

Non-metallic tie

Non-metallic tie

C

min 33" (84 cm)
max 43" (110 cm)

C

Remove plug

min 33" (84 cm)
max 43" (110 cm)

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Included Parts & Accessories

Included:

Pre-connected drain hose

Toe-kick

Power cord (3-prong plug)

Example of Hardwire Installation

Ø 2 1/2"
(63.5 mm)

7"
(178 mm)

2 1/2"
(63.5 mm)

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Ø 2 1/2"
(63.5 mm)

7"
(178 mm)

2 1/2"
(63.5 mm)

Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection

3-prong power cord included

Water and Electrical Locations

(A)

67" (1750) (B)

63" (1600) (B)

45" (1140) (C)

45" (1140) (C)

(D) (E) (F)

A: Front view
B: Drain hose
C: Electrical Power Cord: length shown according to Installation Instructions
D: Inlet
E: Drain
F: Electrical

All connections are at the rear of the appliance. Extension for drain hose available as accessory. Junction Box for hard wired connection available as an accessory.

measurements in inches (mm)
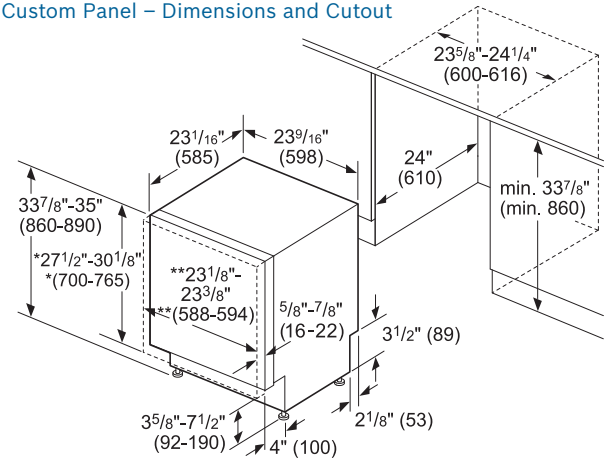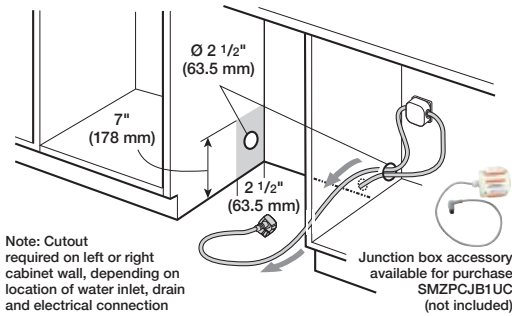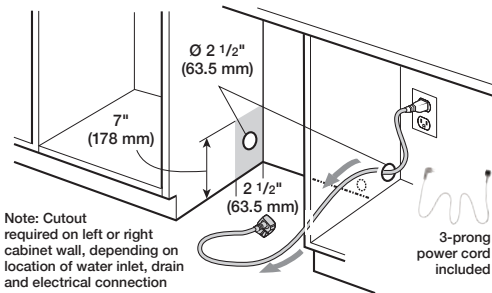
Optional Accessories					
SMZPCJB1UC Junction Box	SMZSH002UC Bosch Dishwasher Water Supply Hose	SGZ1010UC Drain Hose Extension 76 3/4"	SMZ5000 Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket	SMZ5002UC Anti-Tarnish Silverware Cassette	SMZEPCC1UC Edge Protector + Power Cord Clip Install Kit

1–800–944–2904 | bosch-home.com/us

18-Inch ADA Compliant Dishwashers

| 5 |
| 2 |
| 6 |

18-Inch ADA 300 Series
***SPE53U5_UC**
• 46 dBA
• 4 Cycles / 4 Options
• Water Softener
• 24/7 AquaStop® Plus
• Delay Start Timer

18-Inch ADA 800 Series
SPE68U55UC
SPX68U55UC
SPV68U53UC
+44 dBA
+6 Cycles / 5 Options
+Standard 3rd Rack
+Delicate Cycle

+Indicates a step-up feature
* Multiple colors available. See color chips to fill in missing digit.

	18-Inch ADA 300 Series	18-Inch ADA 800 Series
	Recessed Handle – SPE53U5_UC	Recessed Handle – SPE68U55UC Bar Handle – SPX68U55UC Custom Panel – SPV68U53UC
General Properties		
Number of wash cycles / options	4 / 4	6 / 5
dBA	46	44
Drying system	PureDry®	PureDry®
Third rack	No	Standard 3rd rack
Rack adjustability	RackMatic®	RackMatic®
Tub material	Stainless steel	Stainless steel
Control type	Buttons	Buttons
Concealed water heating element	Yes	Yes
Leak protection system	24/7 AquaStop® Plus	24/7 AquaStop® Plus
Water softener	Yes	Yes
Five-level wash	Yes	Yes
ChildLock	Yes	Recessed handle model only
InfoLight®	No	Bar handle and custom panel models only
Special features	24h Delay start timer	Delicate Cycle
Efficiency and Capacity		
Water usage per cycle	2.9	2.9
Energy efficiency class	Tier 1	Tier 1
ENERGY STAR® qualified	Yes	Yes
Total annual energy / water consumption	259 kWh / 623.5 g	259 kWh / 623.5 g
Number of place settings	9	10
Technical Data		
Watts (W)	1440 W	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz	12 A / 120 V / 60 Hz
Power cord length – Install length from corner of unit	67" 45"	67" 45"
Minimum water pressure (lb / sin)	7	7
Length inlet / outlet hose (in)	65" / 80 5/8"	65" / 80 5/8"
Dimensions & Weight		
ADA Compliant	Yes	Yes
Overall appliance dimensions (HxWxD) (in)	32 1/16" x 17 5/8" x 22 9/16"	32 1/16" x 17 5/8" x 22 9/16" (Custom panel D: 21 5/8")
Required cutout size (HxWxD) (in)	32 1/8" x 17 3/4" x 24"	32 1/8" x 17 3/4" x 24" (Custom panel D: min. 22 7/16")
Adjustable feet	Yes	Yes
Net weight (lbs)	72 lbs	76 / 79 / 75 lbs

Optional Accessories

SMZPCJB1UC Junction box	SGZ9091UC Softener Salt (4.4 lbs)	SGZ1010UC Drain Hose Extension 76 3/4"	SMZ5003 Hinge for 4" Toekick Height Installation	SMZEPCC1UC Edge Protector + Power Cord Clip Install Kit

18-Inch ADA Compliant Dishwashers

Dimensions and Cutout

17³/₄"–18" (450-455)
22⁹/₁₆" (573)
17⁵/₈" (448)
24" (610)
min. 32¹/₈" (min. 815)
32¹/₁₆"–34⁷/₁₆" (815-875)
28⁵/₁₆" (720)
3¹/₂" (89)
3³/₄"–6¹/₈" (95-155)
2¹/₁₆" (53)
4⁵/₈" (117)
measurements in inches (mm)

Custom Panel – Dimensions and Cutout

17³/₄"–18" (450-455)
21⁵/₈" (550)
17⁵/₈" (448)
min. 22⁷/₁₆" (min. 610)
min. 32¹/₈" (min. 815)
32¹/₁₆"–34⁷/₁₆" (815-875)
*25³/₄"–28¹/₄" *(655-720)
***17¹/₄"– 17¹/₂" ***(438-444)
**5/8"–7/8" **(16-22)
3¹/₂" (89)
min. 3⁹/₁₆"–max. 8¹¹/₁₆" (min. 90-max. 220)
4" (100)
2¹/₁₆" (53)

* measured from the bottom edge of the countertop panel
** panel weight 6-16 lb (2.5-7.5 kg)
*** 18" (450 mm) wide panel may be used depending on cabinet design
Note: Refer to installation template for mounting hardware locations
measurements in inches (mm)

Plumbing

Non-metallic tie
Non-metallic tie
C
C
Remove plug
min 33" (84 cm) max 43" (110 cm)
min 33" (84 cm) max 43" (110 cm)

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.
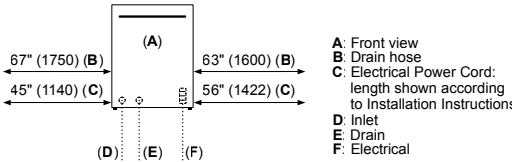
Example of Hardwire Installation

Ø 2 1/2" (63.5 mm)
7" (178 mm)
2 1/2" (63.5 mm)
Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection
Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Ø 2 1/2" (63.5 mm)
7" (178 mm)
2 1/2" (63.5 mm)
Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection
3-prong power cord included

Water and Electrical Locations

Measurements in inches (mm)

66¾" (1700) (B)
59" (1500) (C)
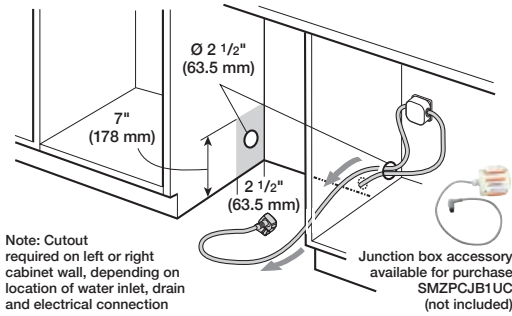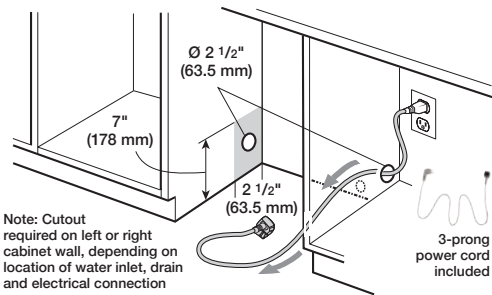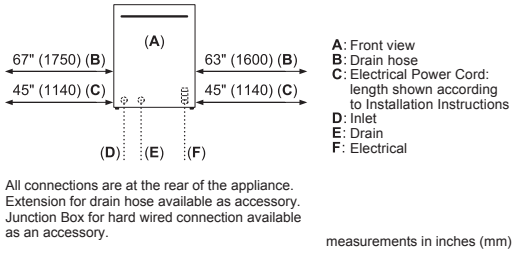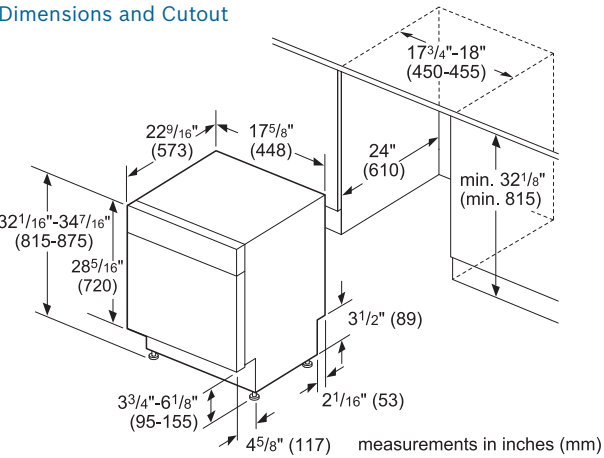45" (1140) (D)
(A)
59" (1500) (B)
47" (1200) (C)
45" (1140) (D)
(E) (F) (G)

All connections are located on the rear of the appliance. Extension for drain hose available as accessory. Junction Box for hard wired connection available as accessory.

A: Front view
B: Drain hose
C: Water inlet hose
D: Electrical Power Cord: length shown according to Installation Instructions
E: Inlet
F: Drain
G: Power

Included Parts & Accessories

Included:
Pre-connected drain hose
Pre-connected AquaStop® Plus inlet hose
Toe-kick
Power cord (3-prong plug) (placed in the upper rack)

Optional Accessories Continued

SMZ5000 Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket	SMZ5002UC Anti-Tarnish Silverware Cassette

Dishwashers — 18-Inch ADA Compliant

24-Inch ADA Compliant Dishwashers

24-Inch ADA 300 Series
*SGE53X5_UC

| 5 |
| 2 |
| 6 |

• 46 dBA
• 4 Cycles / 4 Options
• Water Softener
• 24/7 AquaStop® Plus
• Delay Start Timer

24-Inch ADA 800 Series
SGE68X55UC
SGX68U55UC
SGV68U53UC

+ 44 dBA
+ 6 Cycles / 5 Options
+ Standard 3rd Rack
+ Eco Cycle

+ Indicates a step-up feature
* Multiple colors available. See color chips to fill in missing digit.

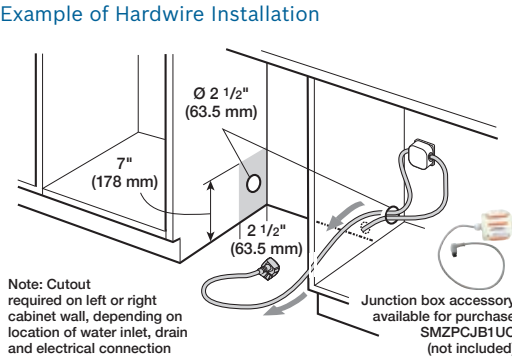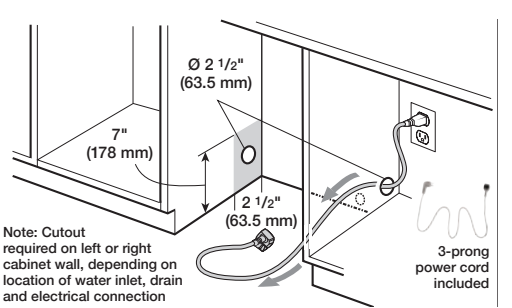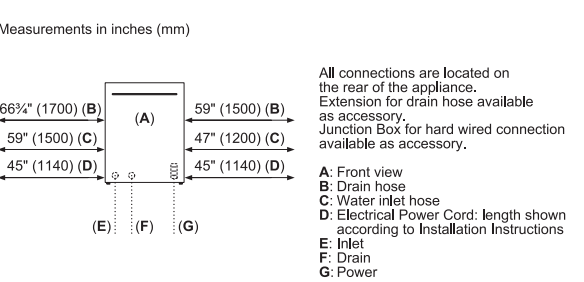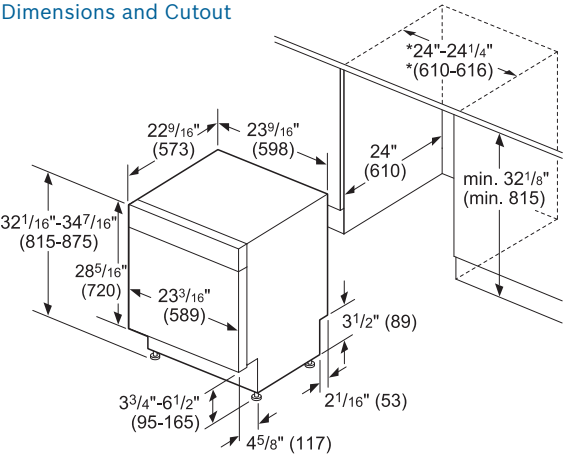|	24-Inch ADA 300 Series	24-Inch ADA 800 Series
	Recessed Handle – SGE53X5_UC	Recessed Handle – SGE68X55UC
		Bar Handle – SGX68U55UC
		Custom Panel – SGV68U53UC
General Properties		
Number of wash cycles / options	4 / 4	6 / 5
dBA	46	44
Drying system	PureDry®	PureDry®
Third rack	No	Standard 3rd rack
Rack adjustability	3-step RackMatic®	RackMatic®
Tub material	Stainless steel	Stainless steel
Control type	Buttons	Buttons
Concealed water heating element	Yes	Yes
Leak protection system	24/7 AquaStop® Plus	24/7 AquaStop® Plus
Water softener	Yes	Yes
Five-level wash	Yes	Yes
ChildLock	Yes	Recessed handle model only
InfoLight®	No	Bar handle and custom panel models only
Special features	24h Delay start timer	InfoLight®, Express Cycle
Efficiency and Capacity		
Water usage per cycle	2.9	2.9
Energy efficiency class	Tier 1	Tier 1
ENERGY STAR® qualified	Yes	Yes
Total annual energy / water consumption	259 kWh / 623.5 g	259 kWh / 623.5 g
Number of place settings	14	15
Technical Data		
Watts (W)	1440 W	1440 W
Current (A) / Volts (V) / Frequency (Hz)	12 A / 120 V / 60 Hz	12 A / 120 V / 60 Hz
Power cord length – Install length from corner of unit	67" / 45"	67" / 45"
Minimum water pressure (lb / sin)	7	7
Length inlet / outlet hose (in)	65" / 74 **7/8**"	65" / 74 **7/8**"
Dimensions & Weight		
ADA compliant	Yes	Yes
Overall appliance dimensions (HxWxD) (in)	32 **1/16**" x 23 **9/16**" x 22 **9/16**"	32 **1/16**" x 23 **9/16**" x 22 **9/16**" (Custom panel D: 21 **5/8**")
Required cutout size (HxWxD) (in)	32 **1/8**" x 24" x 24"	32 **1/8**" x 24" x 24"
Adjustable feet	Yes	Yes
Net weight (lbs)	86 lbs	86 / 92 / 87 lbs

Optional Accessories				
SMZPCJB1UC	SGZ9091UC	SGZ1010UC	SMZ5002UC	SMZEPCC1UC
Junction box	Softener Salt (4.4 lbs)	Drain Hose Extension 76 **3/4**"	Anti-Tarnish Silverware Cassette	Edge Protector + Power Cord Clip Install Kit

24-Inch ADA Compliant Dishwashers
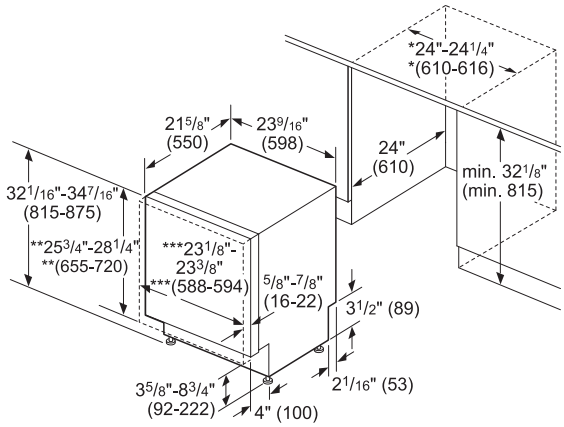
Dimensions and Cutout

22⁹/₁₆" (573) 23⁹/₁₆" (598) 24" (610) min. 32¹/₈" (min. 815)
32¹/₁₆"-34⁷/₁₆" (815-875)
28⁵/₁₆" (720) 23³/₁₆" (589)
3¹/₂" (89)
3³/₄"-6¹/₂" (95-165) 2¹/₁₆" (53)
4⁵/₈" (117)
*24"-24¹/₄" *(610-616)

* 23⁵/₈" (600) without decor strips measurements in inches (mm)

Custom Panel – Dimensions and Cutout

21⁵/₈" (550) 23⁹/₁₆" (598) 24" (610) min. 32¹/₈" (min. 815)
32¹/₁₆"-34⁷/₁₆" (815-875)
25³/₄"-28¹/₄" **(655-720) ***23¹/₈"-23³/₈" *(588-594) 5/8"-7/8" (16-22)
3¹/₂" (89)
3⁵/₈"-8³/₄" (92-222) 4" (100) 2¹/₁₆" (53)
*24"-24¹/₄" *(610-616)

*   23⁵/₈" (600 mm) without decor strips
**   measured from the bottom edge of the countertop panel thickness recommended ³/₄" (20 mm), panel weight 6-18 lbs (2.5-8.5 kg)
*** 24" (610 mm) wide panel may be used depending on cabinet design

measurements in inches (mm)

Plumbing

Non-metallic tie   Non-metallic tie   Remove plug
C   C
min 33" (84 cm) max 43" (110 cm)

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Example of Hardwire Installation

Ø 2 1/2" (63.5 mm)
7" (178 mm)
2 1/2" (63.5 mm)
Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection
Junction box accessory available for purchase SMZPCJB1UC (not included)

Example of Electrical Receptacle Installation

Ø 2 1/2" (63.5 mm)
7" (178 mm)
2 1/2" (63.5 mm)
Note: Cutout required on left or right cabinet wall, depending on location of water inlet, drain and electrical connection
3-prong power cord included

Water and Electrical Locations

Measurements in inches (mm)

66¾" (1700) **(B)**   (A)   59" (1500) **(B)**
59" (1500) **(C)**   47" (1200) **(C)**
45" (1140) **(D)**   45" (1140) **(D)**
(E) (F) (G)

All connections are located on the rear of the appliance. Extension for drain hose available as accessory. Junction Box for hard wired connection available as accessory.

A: Front view
B: Drain hose
C: Water inlet hose
D: Electrical Power Cord: length shown according to Installation Instructions
E: Inlet
F: Drain
G: Power

Included Parts & Accessories

Included:
Pre-connected drain hose
Pre-connected AquaStop® Plus inlet hose
Toe-kick
Power cord (3-prong plug) (placed in the upper rack)

Optional Accessories Continued	
SMZ5000	SMZ1007UC
Accessory Kit: Extra Tall Item Sprinkler, Vase and Bottle Holder, 3 Plastic Item Clips and Small Item Basket	Stainless Steel Bosch Dishwasher Bar Handle

Dishwashers — 24-Inch ADA Compliant

Refrigerators

Introducing the industry's fastest refrigerator ice maker*, only in the new Bosch counter-depth refrigerators. Enjoy freshly filtered ice, replenished fast. With a refrigerator that makes up to 40 glasses of ice per day**, say farewell to frequent ice runs to the store.

Other models in the counter-depth collection feature dual compressors and dual evaporators, a best-in-class freshness system and innovative features. The FarmFresh System™ has four innovative freshness technologies that are designed to work together to keep your food fresh up to 3x longer***, while the adjustable FlexBar® creates extra space in your refrigerator and is completely adaptable to you and your needs.

Explore Bosch built-in and freestanding refrigerators and discover how they blend effortlessly into any kitchen space.

* Based on single ice maker production rates during a 24-hour period, measured per IEC standard and manufacturer user's manuals, for brands identified in US and Canada TraQline as freestanding French door bottom mount refrigerators.

** Based on single ice maker production rates during a 24 hour period, measured per IEC standards, when the ice bin was removed. Results may vary depending on operating conditions. Based on filling 8 oz. glasses.

*** As compared to a Bosch refrigerator without FarmFresh System™. Results may vary among different foods.

300 Series Side-by-Side Refrigerator

300 Series
B20CS30SNS
Side-by-Side

• Counter-Depth
• Easy Clean Stainless Steel
• MultiAirFlow Cooling System
• Filtered Water, Crushed and Cubed Ice Dispenser

300 Series 36" Counter-Depth	
Stainless Steel – B20CS30SNS	
General Properties	
Easy Clean Stainless Steel	Yes
Water filter	Yes
Lighting	LED
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	4
Adjustable shelves – refrigerator	1
Shelf material – refrigerator	Tempered glass
Type of shelves – refrigerator	Framed tempered glass
Gallon storage bins	3
Defrost process freezer section	Automatic
Number of drawers – freezer	2
Adjustable shelves – freezer	3
Shelf material – freezer	Tempered glass
Type of shelves – freezer	Framed tempered glass
Ice maker	Yes
Capacity	
Total unit capacity (cu. ft.) – AHAM	20.2 cu. ft.
Refrigerator capacity (cu. ft.)	13.2 cu. ft.
Freezer capacity (cu. ft.)	6.96 cu. ft.
Technical Details	
Current (A)	15 A
Volts (V)	115 V
Frequency (Hz)	60 Hz
Power cord length (in.)	76.8"
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions (HxWxD) (in.)	69 $\frac{11}{16}$" x 35 $\frac{15}{16}$" x 27 $\frac{1}{2}$"
Required cutout size (HxWxD) (in.)	70" x 36" x 25.9"
Net weight (lbs)	245 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh / yr)	594 kWh

Optional Accessories
BORPLFTR10
Replacement Water Filter (P/N 00740570)

300 Series Side-by-Side Refrigerator

B20CS30SNS Dimensions

$^{(1)}$27^{1}/2" (698)   15^{7}/64" (383.7)

35^{53}/64" (910)

20^{17}/32" (521.5)

$^{(2)}$69^{11}/16" (1770)   2^{1}/16" (52)

11^{1}/2" (292)
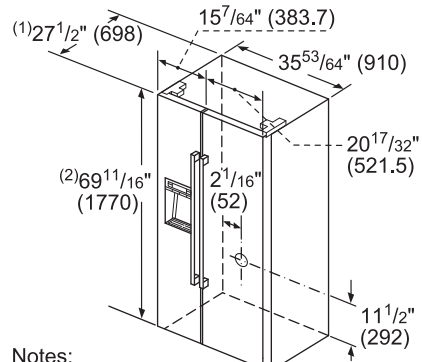
Notes:
$^{(1)}$ Depth 29^{1}/2" with spacers
$^{(2)}$ Front height adjustable from 69^{3}/8" to 70"

B20CS30SNS Dimensions (Overhead Views)

65^{7}/16" (1655)   min. 2" (50.8)

12^{19}/32" (320)   17^{1}/64" (432)

^{3}/4" (19) ^{3}/4" (19)

46^{31}/32" (1193)

145°   90°   90°   145°

41^{17}/32" (1055)
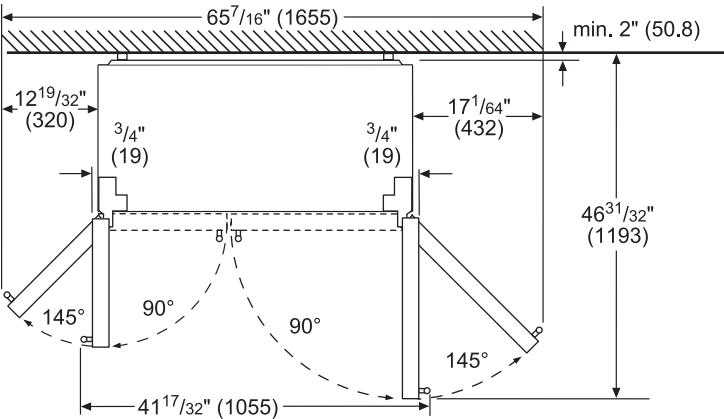
Drawers can be pulled out fully at door opening of 145°

measurements in inches (mm)

B20CS30SNS Installation

36" (914)

25" (635)

70" (1778)

23" (584)

Electrical
Water

Leave a ^{1}/2" (12.7 mm) gap at the top and 2" (51 mm) behind the refrigerator for proper ventilation.
For installation next to a wall, leave a minimum gap of 3^{3}/4" (95.2 mm) on the wall side for opening the door.
It is recommended that you do not install the refrigerator near a heat source such as an oven or a range.
Maximum receptacle and waterline height 23" (584 mm).

31^{1}/2" (800)

29^{1}/2" (750)

2^{1}/32" (51.4)

68^{35}/64" (1741)

25^{15}/16" (659)   spacers

29^{1}/2" (749)

2" (51)

23^{5}/8" (600)   27^{1}/2" (698.5)

29^{17}/32" (750)

^{1}/8" (3.2) ^{1}/8" (3.2)
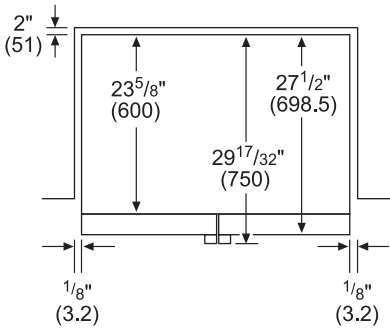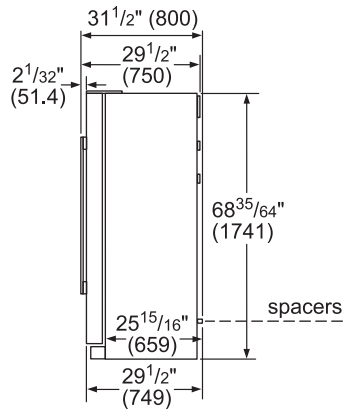
measurements in inches (mm)

500 Series French Door Refrigerators

500 Series
B36CD50SNS (Stainless Steel)
B36CD50SNB (Black Stainless Steel)
French Door

- Counter-Depth
- QuickPro System™ Ice Maker
- Dual Evaporators
- UltraClarityPro™ Water Filter
- Easy Clean Stainless Steel
- MultiAirFlow™ Cooling System
- Home Connect™

| 500 Series 36" Counter-Depth	
Stainless Steel – B36CD50SNS Black Stainless Steel – B36CD50SNB	
General Properties	
Full 69" height and true counter depth for built-in appearance	Yes
Easy Clean Stainless Steel	Yes
Lighting	Recessed LED light bars
Number of evaporators	1
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	5
Adjustable glass shelves – refrigerator	4 half-width
Type of shelves – refrigerator	Frameless split shelves with chromed trim
Ice maker	Yes
Water filter	UltraClarityPro™
External water and ice dispenser	Yes
Gallon storage bins	2
Humidity control compartments	2
Full width drawer	1
Touch control panel	Yes
AirFresh® filter, MultiAirFlow™	Yes, yes
Stainless steel back wall	Yes
Defrost process freezer section	Automatic
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect™ app
Capacity	
Total capacity (cu. ft.)	21.6 cu. ft.
Refrigerator / Freezer capacity (cu. ft.)	15.2 cu. ft. / 6.4 cu. ft.
Technical Details	
Current (A), Volts (V), Frequency (Hz)	15 A, 115 V, 60 Hz
Power cord length (in.)	91"
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions with hinges, handles and doors (HxWxD) (in.)	70"* x 35 5/8" x 31 1/8"
Appliance dimensions without hinges and doors (HxWxD) (in.)	69 1/2" x 35 5/8" x 24"**
Appliance dimensions with hinges and doors, no handles (HxWxD) (in.)	70"* x 35 5/8" x 28 3/4"
Required cutout size (HxWxD) (in.)	70" x 36" x 25"
Net weight (lbs)	350 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh / yr)	656 kWh

*When leveling legs are fully extended, add 5/8" to overall height, total 70 5/8".
**The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.

500 Series French Door Refrigerators

B36CD50SNS/B Dimensions

Measurements in inches (mm)

Measurements in inches (mm)

A: Add 5/8" (17) with front leveling feet fully extended
B: Add 1" (25) for fixed spacers on back

A: Add 5/8" (17) with front leveling feet fully extended

B36CD50SNS/B Dimensions (Overhead Views)

Measurements in inches (mm)

Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.

B36CD50SNS/B Installation

measurements in inches (mm)

Leave 1/2" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.
It is recommended that you do not install the refrigerator near a heat source such as an oven or a range.

Optional Accessories

BORPLFTR50
UltraClarityPro™
Replacement Water Filter

1–800–944–2904 | bosch-home.com/us

800 Series French Door Refrigerator

800 Series
B36CT80SNS (Stainless)
B36CT80SNB (Black Stainless Steel)
French Door

+ Dual Compressor and Dual Evaporator
• Counter-Depth
+ FarmFresh System™
+ VitaFreshPro™ Freshness Settings
• Interior Water Dispenser
+ FlexBar® Flexible Storage Bar
• Home Connect™

Home Connect

800 Series 36" Counter-Depth	
Stainless Steel – B36CT80SNS Black Stainless Steel – B36CT80SNB	
General Properties	
Full 72" height and true counter depth for built-in appearance	Yes
Easy Clean Stainless Steel	Yes
Lighting	Recessed LED light bars
Number of compressors / evaporators	2 / 2
Defrost process refrigerator / freezer section	Frost-free / automatic
Adjustable tempered glass shelves – refrigerator	4 half-width
Flexible storage bar	FlexBar®
Full width temp. & humidity controlled drawer	VitaFreshPro™
Humidity control compartments, gallon storage bins	2, 2
Water dispenser, freezer ice maker, water filter	Yes (internal), yes, UltraClarityPro™
MultiAirFlow™	Yes
AirFresh® filter, FreshProtect® ethylene filter	Yes, yes
Stainless steel back wall	Yes
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect™ app
Capacity	
Total capacity (cu. ft.)	20.8 cu. ft.
Refrigerator capacity (cu. ft.)	14.8 cu. ft.
Freezer capacity (cu. ft.)	6.0 cu. ft.
Technical Details	
Current (A)	15 A
Volts (V)	115 V
Frequency (Hz)	60 Hz
Power cord length (in.)	91"
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions with hinges, handles and doors (HxWxD) (in.)	72"* x 35 5/8" x 31 1/8"
Appliance dimensions without hinges and doors (HxWxD) (in.)	71 1/2" x 35 5/8" x 24"**
Appliance dimensions with hinges and doors, no handles (HxWxD) (in.)	72"* x 35 5/8" x 28 3/4"
Required cutout size (HxWxD) (in.)	72" x 36" x 25"
Net weight (lbs)	350 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh / yr)	570 kWh

*When leveling legs are fully extended, add 5/8" to overall height, total 72 5/8".
**The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.

800 Series French Door Refrigerator

B36CT80SNS/B Dimensions
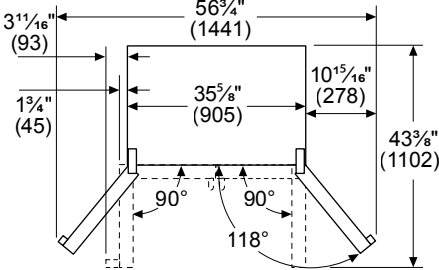

Measurements in inches (mm)

28¾" (731)
25" (635)
44⁹⁄₁₆" (1132)
72" (1830) (A)
71½" (1815)
24" (610)

*72" (1830)
71½" (1815)
35 5/8" (905)
**24" (610)

*Add 5/8" (17) with front levelling feet fully extended
**Add 1" (25) for fixed spacers on back measurements in inches (mm)

**A**: Add 5/8" (17) with front leveling feet fully extended

B36CT80SNS/B Dimensions (Overhead Views)

3¹¹⁄₁₆" (93)
56¾" (1441)
1¾" (45)
35 5/8" (905)
10¹⁵⁄₁₆" (278)
43⅜" (1102)
90° 90°
118°

Measurements in inches (mm)
1" (25)
25" (635)
28¾" (731)
31⅛" (790)
⅛" (3)
⅛" (3)

Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.

B36CT80SNS/B Dimensions Installation

36" (914)
72" (1830)
25" (635)

Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.

measurements in inches (mm)

Optional Accessories				
BOFLEXBOTL FlexBar® Bottle Holder	BOFLEXLGSH FlexBar® Deep Shelf	BOFLEXSMSH FlexBar® Shallow Shelf	BORPLFTR50 UltraClarityPro™ Replacement Water Filter	FPETHRF50 Ethylene Filter Refill Kit

1–800–944–2904 | bosch-home.com/us

800 Series French Door Refrigerator

**800 Series
B26FT50SNS
French Door**

- Standard-Depth
- Easy Clean Stainless Steel
- MultiAirFlow™ Cooling System
- Storable Partial Shelf
- Humidity Controlled Crisper Drawers
- Quick Ice

**800 Series
B36CT81SNS
French Door**

- Dual Compressor and Dual Evaporator
- Counter-Depth
- FarmFresh System™
- VitaFreshPro™ Freshness Settings
- Interior Water Dispenser
- FlexBar® Flexible Storage Bar
- Pro Style Handles
- Home Connect™

|	800 Series 36" Standard-Depth	800 Series 36" Counter-Depth
	Stainless Steel – B26FT50SNS	Stainless Steel – B36CT81SNS
General Properties		
Full 72" height and true counter depth for built-in appearance	N/A	Yes
Easy Clean Stainless Steel	Yes	Yes
Lighting	Theater design LED	Recessed LED light bars
Number of compressors / evaporators	1 / 1	2 / 2
Defrost process refrigerator section	Frost-free	Frost-free
Adjustable glass shelves – refrigerator	4	4 half-width
Flexible storage	1 storable partial shelf	FlexBar® storage bar
Gallon storage bins	2	2
Humidity control compartments	2	2
Full width temp. & humidity controlled drawer	No	VitaFreshPro™
Water dispenser, ice maker, water filter	Yes, yes, yes	Yes (internal), yes, UltraClarityPro™
MultiAirFlow™	Yes	Yes
AirFresh® filter, FreshProtect® ethylene filter	No, no	Yes, yes
Stainless steel back wall	No	Yes
Number of drawers – freezer	2	3
Wi-Fi enabled	No	Yes, Home Connect™ app
Quick ice	Yes	N/A
Capacity		
Total capacity (cu. ft.)	25.0 cu. ft.	20.8 cu. ft.
Refrigerator capacity (cu. ft.)	17.2 cu. ft.	14.8 cu. ft.
Freezer capacity (cu. ft.)	7.8 cu. ft.	6.0 cu. ft.
Technical Details		
Current (A), Volts (V), Frequency (Hz)	15 A , 120 V , 60 Hz	15 A , 120 V , 60 Hz
Power cord length (in.)	98"	91"
Plug type	120V-3 prong	120V-3 prong
Dimensions & Weight		
Appliance dimensions with hinges, handles and doors (HxWxD) (in.)	69 3/4" x 35 5/8" x 32 15/32"	72"* x 35 5/8" x 31 1/8"
Appliance dimensions without hinges and doors (HxWxD) (in.)	68 19/32" x 35 5/8" x 29 1/8"	71 1/2" x 35 5/8" x 24"**
Appliance dimensions with hinges and doors, no handles (HxWxD) (in.)	69 3/4" x 35 5/8" x 32 15/32"	72"* x 35 5/8" x 28 3/4"
Required cutout size (HxWxD) (in.)	69" x 36" x 30 3/8"	72" x 36" x 25"
Net weight (lbs)	325 lbs	350 lbs
Efficiency		
ENERGY STAR® qualified	Yes	Yes
Energy consumption (kWh / yr)	693 kWh	568 kWh

*When leveling legs are fully extended, add 5/8" to overall height, total 72 5/8".
**The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.

800 Series French Door Refrigerator

B26FT50SNS Dimensions

measurements in inches (mm)
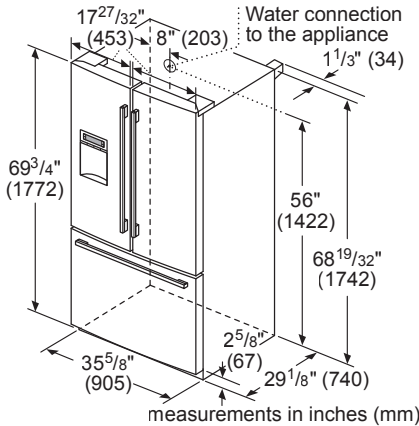
B26FT50SNS (Overhead Views)

Drawers can be pulled out with door open 90°. Drawers can be taken out with door completely opened.

*The 1 1/3" (34) fixed spacer on back of appliance allows proper ventilation and space for the water connection.

measurements in inches (mm)

B26FT50SNS Installation

The 1 1/3" (34 mm) fixed spacer on back of appliance allows proper ventilation and space for the water connection.

For installation next to a wall, leave a minimum gap of 3 3/4" (95.2 mm) on the wall side for opening the door.

It is recommended that you do not install the refrigerator near a heat source such as an oven or a range.

Maximum receptacle and water line height 23" (584 mm).

Add 63/64" (25 mm) to appliance height dimension at front if leveling legs are fully extended.

B36CT81SNS Installation

Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.

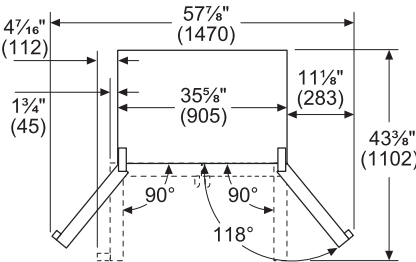measurements in inches (mm)

B36CT81SNS Dimensions

*Add 5/8" (17) with front levelling feet fully extended
**Add 1" (25) for fixed spacers on back
measurements in inches (mm)

A: Add 5/8" (17) with front leveling feet fully extended

B36CT81SNS (Overhead Views)

Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.
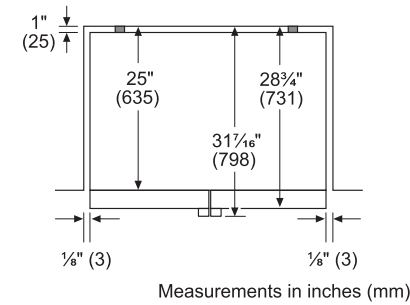
Measurements in inches (mm)

B26FT50SNS Accessories

BORPLFTR10
Replacement Water Filter (P/N 00740570)

B36CT81SNS Optional Accessories

BOHANDL50
Pro-style Stainless Steel Handle Kit (P/N 00775144)

B36CT81SNS Accessories

BOFLEXBOTL
FlexBar®
Bottle Holder

BOFLEXLGSH
FlexBar®
Deep Shelf

BOFLEXSMSH
FlexBar®
Shallow Shelf

BORPLFTR50
UltraClarityPro™
Replacement Water Filter

FPETHRF50
Ethylene Filter
Refill Kit

1–800–944–2904 | bosch-home.com/us

800 Series 4-Door French Door Refrigerators

800 Series
B36CL80SNS (Bar Handles)
B36CL80ENS (Recessed Handles)
4-Door French Door

- Dual Compressor and Dual Evaporator
- Counter-Depth
- FarmFresh System™
- VitaFreshPro™ Freshness Settings
- Interior Water Dispenser
- FlexBar® Flexible Storage Bar
- Home Connect™

800 Series 36" Counter-Depth	
Stainless Steel with Bar Handles – B36CL80SNS Stainless Steel with Recessed Handles – B36CL80ENS	
General Properties	
Full 72" height and true counter depth for built-in appearance	Yes
Easy Clean Stainless Steel	Yes
Lighting	Recessed LED light bars
Number of compressors / evaporators	2 / 2
Defrost process refrigerator / freezer section	Frost-free / automatic
Adjustable tempered glass shelves – refrigerator	4 half-width
Flexible storage bar	FlexBar®
Full width temp. & humidity controlled drawer	VitaFreshPro™
Water dispenser, freezer ice maker, water filter	Yes (internal), yes, UltraClarityPro™
Humidity control compartments, gallon storage bins	2, 2
MultiAirFlow™	Yes
AirFresh® filter, FreshProtect® ethylene filter	Yes, yes
Stainless steel back wall	Yes
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect™ app
Capacity	
Total capacity (cu. ft.)	20.5 cu. ft.
Refrigerator / freezer capacity (cu. ft.)	14.5 / 6.0 cu. ft.
Technical Details	
Current (A), Volts (V), Frequency (Hz)	15 A, 115 V, 60 Hz
Power cord length (in.)	91"
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions with hinges, handles and doors (HxWxD) (in.)	B36CL80SNS: 72"* x 35 **5/8**" x 31 **1/8**" B36CL80ENS: 72"* x 35 **5/8**" x 28 **3/4**"
Appliance dimensions without hinges and doors (HxWxD) (in.)	71 **1/2**" x 35 **5/8**" x 24"**
Appliance dimensions with hinges and doors, no handles (HxWxD) (in.)	72"* x 35 **5/8**" x 28 **3/4**"
Required cutout size (HxWxD) (in.)	72" x 36" x 25"
Net weight (lbs)	350 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh / yr)	568 kWh

*When leveling legs are fully extended, add **5/8**" to overall height, total 72 **5/8**".
**The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.

Optional Accessories				
BOFLEXBOTL FlexBar® Bottle Holder	BOFLEXLGSH FlexBar® Deep Shelf	BOFLEXSMSH FlexBar® Shallow Shelf	BORPLFTR50 UltraClarityPro™ Replacement Water Filter	FPETHRF50 Ethylene Filter Refill Kit

800 Series 4-Door French Door Refrigerators

B36CL80SNS Dimensions

*Add **5/8**" (17) with front levelling feet fully extended
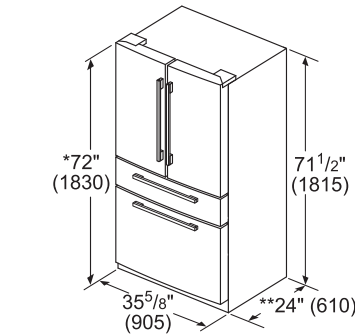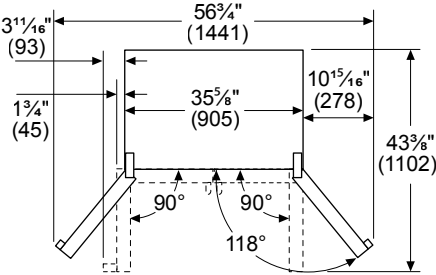**Add 1" (25) for fixed spacers on back

A: Add **5/8**" (17) with front leveling feet fully extended

Measurements in inches (mm)

B36CL80SNS (Overhead Views)

Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.

1/8" (3)   **1/8**" (3)

Measurements in inches (mm)

B36CL80ENS Dimensions

* Add **5/8**" (17) with front levelling feet fully extended
** Add 1" (25) for fixed spacers on back

A: Add **5/8**" (17) with front leveling feet fully extended

Measurements in inches (mm)

B36CL80ENS (Overhead Views)

Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.

1/8" (3)   **1/8**" (3)

Measurements in inches (mm)

36" Freestanding Installation

Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.

measurements in inches (mm)

Refrigeration — 800 Series Freestanding 4-Door French Door

800 Series 4-Door French Door Refrigerators

800 Series
B36CL81ENG (Glass over Stainless Steel w/ Recessed Handles)
4-Door French Door

- Counter-Depth
+ Refreshment Center Drawer with Pre-Programmed Settings
- Dual Compressor and Dual Evaporator
+ Stylish Tempered Glass Door
- Interior Water Dispenser
- FlexBar® Flexible Storage Bar
- Home Connect™

Home Connect

800 Series 36" Counter-Depth	
Glass over Stainless Steel w/ Recessed Handles – B36CL81ENG	
General Properties	
Full 72" height and true counter depth for built-in appearance	Yes
Easy Clean Stainless Steel	Yes
Lighting	Recessed LED light bars
Number of compressors / evaporators	2 / 2
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	5
Adjustable glass shelves – refrigerator	4 half-width
Type of shelves – refrigerator	Frameless split shelves with metal trim
Flexible storage bar	FlexBar®
Gallon storage bins	2
Full width glass display drawer	1
Ice maker	Yes
Water filter	UltraClarityPro™
Internal water dispenser	Yes
Touch control panel	Yes
AirFresh® filter, MultiAirFlow™	Yes, yes
FreshProtect® ethylene filter	No
Stainless steel back wall	Yes
Defrost process freezer section	Automatic
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect™ app
Capacity	
Total capacity (cu. ft.)	20.5 cu. ft.
Refrigerator / Freezer capacity (cu. ft.)	14.5 cu. ft. / 6.0 cu. ft.
Technical Details	
Current (A), Volts (V), Frequency (Hz)	15 A, 115 V, 60 Hz
Power cord length (in.)	91"
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions with hinges, handles and doors (HxWxD) (in.)	72"* x 35 5/8" x 29"
Appliance dimensions without hinges and doors (HxWxD) (in.)	71 1/2" x 35 5/8" x 24"**
Appliance dimensions with hinges and doors, no handles (HxWxD) (in.)	72"* x 35 5/8" x 29"
Required cutout size (HxWxD) (in.)	72" x 36" x 25"
Net weight (lbs)	350 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh / yr)	568 kWh

*When leveling legs are fully extended, add 5/8" to overall height, total 72 5/8".
**The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.

800 Series 4-Door French Door Refrigerators

B36CL81ENG Dimensions

Measurements in inches (mm)

* Add 5/8" (17) with front leveling feet fully extended
** Add 1" (25) for fixed spacers on back measurements in inches (mm)

A: Add 5/8" (17) with front leveling feet fully extended

B36CL81ENG Dimensions (Overhead Views)

Measurements in inches (mm)
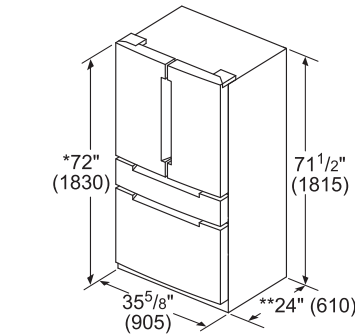
Drawers can be pulled out with door open to 90°. Drawers can be taken out with door completely opened.
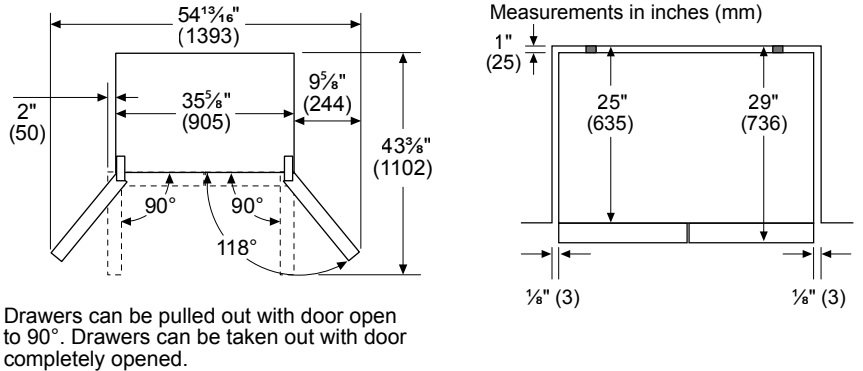
B36CL81ENG Installation
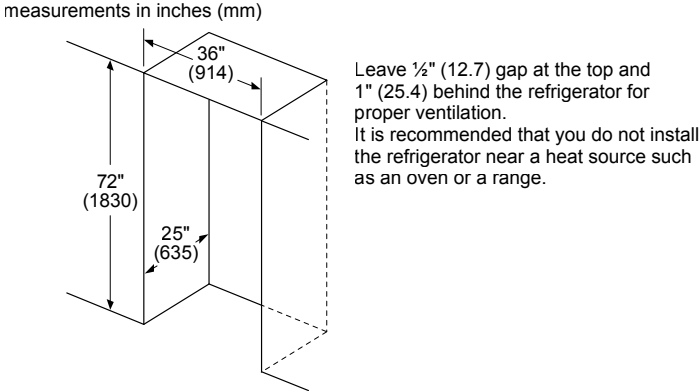
measurements in inches (mm)
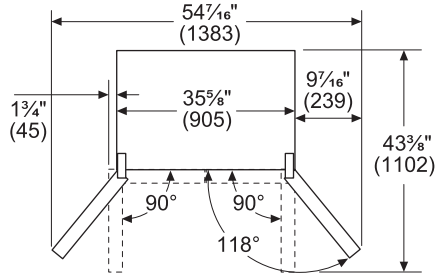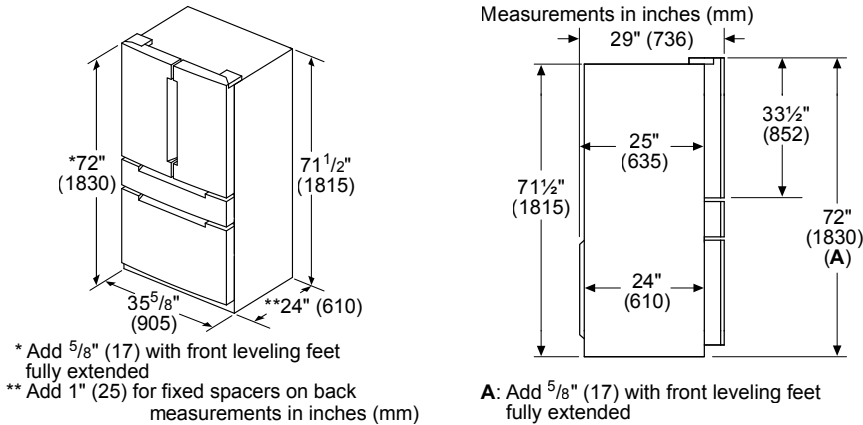

Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.
It is recommended that you do not install the refrigerator near a heat source such as an oven or a range.

Optional Accessories

BOFLEXBOTL	BOFLEXLGSH	BOFLEXSMSH	BORPLFTR50
FlexBar®	FlexBar®	FlexBar®	UltraClarityPro™
Bottle Holder	Deep Shelf	Shallow Shelf	Replacement Water Filter

1–800–944–2904 | bosch-home.com/us

500 / 800 Series 24" Bottom Freezer Refrigerators

500 Series
B11CB50SSS
Bottom Freezer

• Counter-Depth
• HydroFresh Drawer
• Wine Rack
• Sidewall LED Lighting
• Easy Clean Stainless Steel

800 Series
B11CB81SSS
Bottom Freezer

• Counter-Depth
+ Built-in Ice Maker
• HydroFresh Drawer
• Wine Rack
• Sidewall LED Lighting
• Easy Clean Stainless Steel

800 Series
B10CB81NVW (White)
B10CB81NVB (Black)
Glass Door Bottom Freezer

• Counter-Depth
+ Stylish Tempered Glass Door
• HydroFresh Drawer
• Wine Rack

+ Indicates a step-up feature

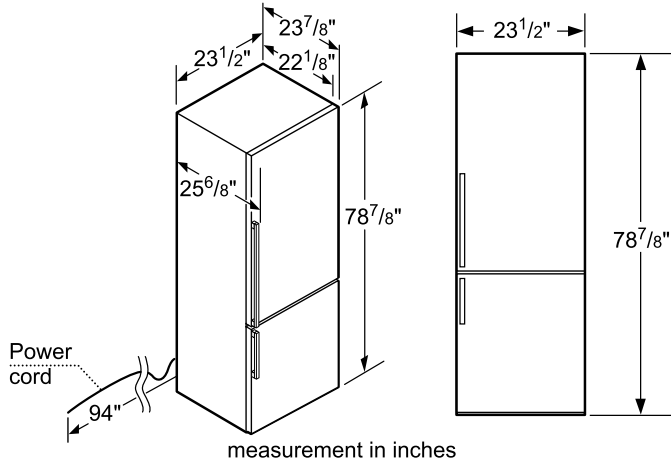|	500 Series 24" Counter-Depth	800 Series 24" Counter-Depth	800 Series 24" Counter-Depth
	Stainless Steel – B11CB50SSS	Stainless Steel – B11CB81SSS	White Glass – B10CB81NVW Black Glass – B10CB81NVB
General Properties			
Reversible door hinge	Yes	Yes	Yes
Easy Clean Stainless Steel	Yes	Yes	N/A
Water filter	No	No	No
Lighting	LED	LED	LED
Defrost process refrigerator section	Frost-free	Frost-free	Frost-free
Number of shelves – refrigerator	3	3	3
Adjustable shelves – refrigerator	2	2	2
Shelf material – refrigerator	Tempered glass	Tempered glass	Tempered glass
Type of shelves – refrigerator	Spill-proof glass	Spill-proof glass	Spill-proof glass
Door storage bins	3	3	3
Humidity control drawer	1	1	1
Defrost process freezer section	Automatic	Automatic	Automatic
Number of drawers – freezer	3	2	3
Shelf material – freezer	Metal	Metal	Metal
Type of shelves – freezer	Wire	Wire	Wire
Ice maker	No	Yes	No
Capacity			
Total unit capacity (cu. ft.) – AHAM	11 cu. ft.	11 cu. ft.	10 cu. ft.
Refrigerator capacity (cu. ft.)	7.7 cu. ft.	7.7 cu. ft.	7.5 cu. ft.
Freezer capacity (cu. ft.)	3.3 cu. ft.	3.3 cu. ft.	2.5 cu. ft.
Technical Details			
Current (A)	15 A	15 A	10 A
Volts (V)	120 V	120 V	110 – 120 V
Frequency (Hz)	60 Hz	60 Hz	60 Hz
Power cord length (in.)	94"	94"	94"
Plug type	120V-3 prong	120V-3 prong	120V-3 prong
Dimensions & Weight			
Appliance dimensions (HxWxD) (in.)	78 $7/8$" x 23 $1/2$" x 23 $7/8$"	78 $7/8$" x 23 $1/2$" x 23 $7/8$"	72 $7/8$" x 23 $1/2$" x 25 $3/4$"
Required cutout size (HxWxD) (in.)*	79 $1/2$" x 24" x 24"	79 $1/2$" x 24" x 24"	73 $1/2$" x 24 $1/8$" x 22"
Net weight (lbs)	181 lbs	181 lbs	192 lbs
Efficiency			
ENERGY STAR® qualified	Yes	Yes	Yes
Energy consumption (kWh / yr)	357 kWh	357 kWh	383 kWh

*Add $3/4$" (1.9 cm) to the height dimension when leveling legs are fully extended

500 / 800 Series 24" Bottom Freezer Refrigerators

24" B11CB50SSS & B11CB81SSS Dimensions

$23^7/8$"
$23^1/2$"
$22^1/8$"
$23^1/2$"
$25^6/8$"
$78^7/8$"
$78^7/8$"
Power cord
94"

measurement in inches

24" B11CB50SSS Installation

24"
24"
$79^1/2$"
Electrical

measurement in inches

24" B11CB81SSS Installation

24"
24"
$79^1/2$"
A: Area for installation of power connection.
B: Area for running the water line.
15"
$5^1/8$"
4"

Measurement in inches

24" B10CB81NVW/B Dimensions

$23^1/2$" (595)
$21^5/8$" (550)
$2^7/8$" (631)
$25^3/4$" (654)
$72^7/8$" (1850)
power cord
94" (2400)
$23^5/8$" (601)

Measurement in inches (mm)

24" B10CB81NVW/B Installation

$24^1/8$" (610)
22" (559)
relevant for counter depth installation
$73^1/2$" (1870)
electrical

Measurement in inches (mm)

24" B10CB81NVW/B Overhead Views

$5/8$" (15)
$3^3/4$" (95)
$45^{43}/64$" (1160)
90°
125°
$24^{11}/16$" (627)
$33^{15}/64$" (844)

Measurement in inches (mm)

Refrigeration — 500 / 800 Series 24" Freestanding Bottom Freezers
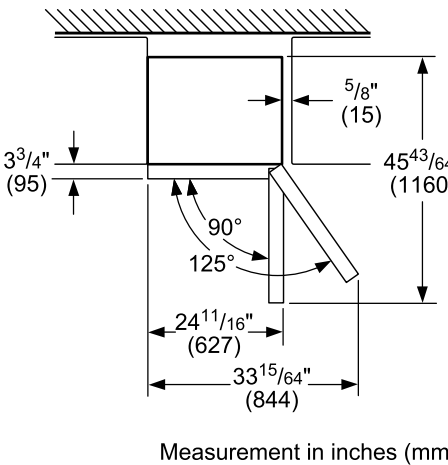
800 Series 22" Built-in Bottom Freezer Refrigerator

800 Series
B09IB91NSP
Built-in Custom Panel Bottom Freezer with Home Connect™

+Home Connect™
• Custom Panel Ready
• Installs Completely Flush
• Recessed LED lighting
+VitaFresh™ Pro Drawer

Home Connect

+Indicates a step-up feature

	800 Series 22" with Home Connect™
	Custom Panel – B09IB91NSP
General Properties	
Home Connect™ (Wi-Fi enabled)	Yes
Reversible door hinge	Yes
Water filter	No
Lighting	Recessed LED lighting
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	3
Adjustable shelves – refrigerator	2
Shelf material – refrigerator	Tempered glass w/metal trim
Type of shelves – refrigerator	Full-width
Gallon storage bins	No
Humidity and temperature controlled drawer	VitaFreshPro™
Defrost process freezer section	Automatic
Number of drawers – freezer	3
Ice packs	2
MultiAirFlow™	Yes
Wi-Fi enabled	Yes, Home Connect™ app
Small item railing	Yes, in the door bin
Soft close capability	Yes
Capacity	
Total capacity (cu. ft.)	8.3 cu. ft.
Technical Details	
Current (A)	10 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in.)	90.5"
Plug type	3-Prong
Dimensions & Weight	
Appliance dimensions (HxWxD) (in.)	69 3/4" x 22" x 21 1/2"
Required cutout size (HxWxD) (in.)	70" x 22 1/16" x 22 1/16"
Net weight (lbs)	145 lbs
Efficiency	
ENERGY STAR® qualified	Yes
Energy consumption (kWh / yr)	388 kWh

B09IB91NSP Dimensions
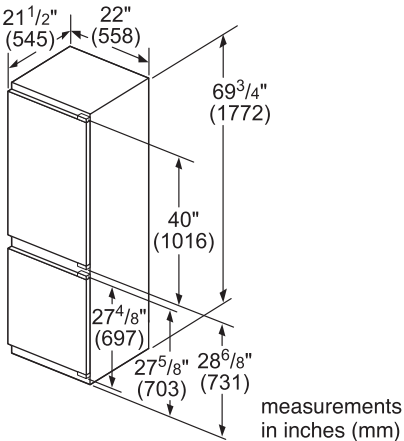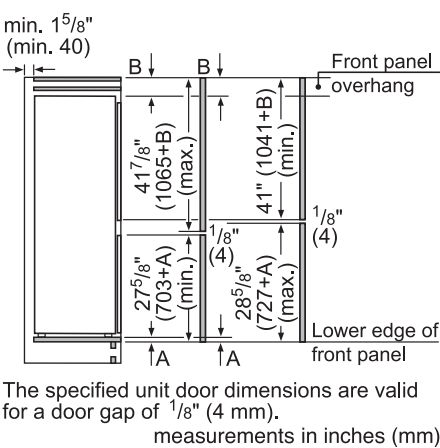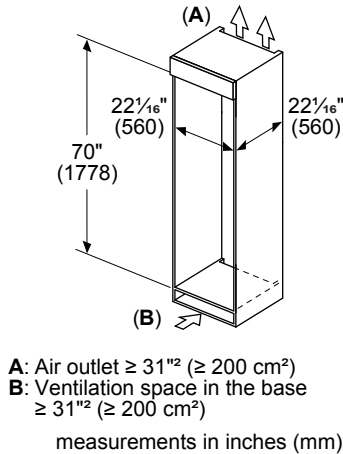

21 1/2" (545) 22" (558)
69 3/4" (1772)
40" (1016)
27 4/8" (697)
27 5/8" (703) 28 6/8" (731)
measurements in inches (mm)

B09IB91NSP Installation

(A)
22 1/16" (560) 22 1/16" (560)
70" (1778)
(B)

A: Air outlet ≥ 31"² (≥ 200 cm²)
B: Ventilation space in the base ≥ 31"² (≥ 200 cm²)

measurements in inches (mm)

min. 1 5/8" (min. 40)
Front panel overhang
B B
41 7/8" (1065+B) (max.)
41" (1041+B) (min.)
1/8" (4)
27 5/8" (703+A) (min.)
28 5/8" (727+A) (max.)
1/8" (4)
1/8" (4)
Lower edge of front panel
A A

The specified unit door dimensions are valid for a door gap of 1/8" (4 mm).
measurements in inches (mm)

Recommended Gap Dimensions for Flat Hinges

F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be maintained to guarantee collision-free opening of appliance doors and avoid damage to kitchen furniture.

Measurements in mm

IMPORTANT: Handleless Panels should not be installed on units without the soft close capability. If you are uncertain if you have a refrigeration unit with soft close capability please contact our customer team by calling 1–800–944–2904.

Laundry

With sleek, functional, compact designs, Bosch washers and dryers fit your home as much as your lifestyle. Surprisingly spacious and efficient, Bosch's compact 24" design seamlessly integrates into any laundry space either stacked or side-by-side. Our ENERGY STAR® certified washers and dryers are engineered with a variety of cycles to clean faster and preserve delicate fabrics, while saving water and energy. Ultra quiet, these space-saving, compact machines are designed to lighten life's laundry load.

The all-new 500 Series dryer with heat pump technology and America's only Self-cleaning Condenser* reduces energy usage by approximately 60%** for a more efficient dry.

Also fitted with Home Connect™, the 500 and 800 Series laundry pairs can be remotely controlled and monitored from your smart device so you can effortlessly tackle your to-do list.

 * All Bosch washers and certain 500 and 800 Series dryers are ENERGY STAR® qualified.

** Based on a comparison of Bosch condensation dryers and Bosch dryers with heat pump technology as listed on the ENERGY STAR® website.

24" Compact Washers

300 Series
WAT28400UC

- SpeedPerfect® Provides Up to 40% Faster Washing Time*
- EcoSilence Motor Delivers Quiet, Efficient Performance
- Anti-vibration Circular Side Walls Reduce Vibration
- ENERGY STAR® Certified

500 Series
WAW285H1UC   Home Connect

- + Home Connect™ Controls Washer Remotely
- + Recognized as ENERGY STAR® Most Efficient of 2020
- + AquaShield® Provides Protection Against Water Damage
- + Sanitize Cycle Heats Water to Over 140 Degrees
- + Lower Noise 52 / 72 dBA (Washing / Spinning)

+ Indicates a step-up feature

	300 Series	500 Series
	White – WAT28400UC	White – WAW285H1UC
General Properties		
Tub material	Stainless steel	Stainless steel
Maximum spin speed (rpm)	1,400	1,400
Interior light	No	No
Leak protection systems	Reinforced hose	AquaShield® hose
Internal water heater	Yes	Yes
Stackable	Yes with Stacking Kit Accessory	Yes with Stacking Kit Accessory
Silence level – washing (dBA)	54	52
Silence level – spinning (dBA)	73	72
Programs (No.), [Special]	(15), [Allergen, Jeans, Heavy Duty]	(14), [Sanitize, Outdoor / Sport]
Options (No.), [Special]	(6), [SpeedPerfect®, PreWash]	(10), [Remote Start, EcoPerfect™, Stains]
Energy consumption (kWh / yr)	84	84
Water consumption (gal / yr)	2,379	2,379
ENERGY STAR® certified	Yes	Most Efficient of 2020
Capacity		
Capacity (cu. ft.)	2.2	2.2
Design Elements		
Door ring	White	Silver
Control type	Touch	Premium LED touch
Dial	White	Illuminated jog dial
Bosch logo on door glass	No	Yes
Technical Details		
Watts (W)	2,520	2,520
Circuit breaker if plugged into an individual circuit (A)	15**	15**
Volts (V)	208/220-240	208/220-240
Current (A)	10.5	10.5
Frequency (Hz)	60	60
Plug type	240V; NEMA 6-15 (3 prong)	240V; NEMA 6-15 (3 prong)
Included power cord length (in)	63" (Full length)	63" (Full length)
Drain / inlet hose length (in)	57" / 48" (Full length)	57" / 59" (Full length)
Door hinge	Left side (not reversible)	Left side (not reversible)
Dimensions & Weight		
Overall dimensions (HxWxD) (in)	33 1/4" x 23 1/2" x 25"	33 1/4" x 23 1/2" x 25"
Net weight (lbs)	160	160
Minimum stack height (in)	67 3/4"	67 3/4"
ADA compliance	Meets ADA height and access requirements *when installed on pedestal*. Meets ADA operable parts requirements for controls and detergent dispenser.	

*As compared to Perm Press Heavy Soil cycle without SpeedPerfect®
**Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit. Matching Dryer is supplied with a power adapter to fit into a standard 4-prong 30A Dryer receptacle (NEMA 14-30R) and power both Bosch Washer and Dryer.

24" Compact Washers

800 Series
WAW285H2UC   Home Connect

- + AquaStop® Plus for Leak Protection in the Base and in the Hose
- + Premium LED Controls with Enhanced Text and Icons
- + Illuminated Selection Jog Dial
- + LED Interior Light
- + SuperQuick 15 Minute Program
- + Lower Noise 50 / 71 dBA (Washing / Spinning)

+ Indicates a step-up feature

	800 Series
	White – WAW285H2UC
General Properties	
Tub material	Stainless steel
Maximum spin speed (rpm)	1,400
Interior light	Yes (LED)
Leak protection systems	AquaStop® Plus (AquaStop® base + AquaShield® hose)
Internal water heater	Yes
Stackable	Yes with Stacking Kit Accessory
Silence level – washing (dBA)	50
Silence level – spinning (dBA)	71
Programs (No.), [Special]	(14), [SuperQuick 15, Whitest Whites]
Options (No.), [Special]	(10), [Remote Start, EcoPerfect™, Stains]
Energy consumption (kWh / yr)	84
Water consumption (gal / yr)	2,379
ENERGY STAR® certified	Yes
Capacity	
Capacity (cu. ft.)	2.2
Design Elements	
Door ring	Chrome
Control type	Premium LED touch
Dial	Illuminated jog dial
Bosch logo on door glass	Yes
Technical Details	
Watts (W)	2,520
Circuit breaker if plugged into an individual circuit (A)	15*
Volts (V)	208/220-240
Current (A)	10.5
Frequency (Hz)	60
Plug type	240V; NEMA 6-15 (3 prong)
Included power cord length (in)	63" (Full length)
Drain / inlet hose length (in)	57" / 59" (Full length)
Door hinge	Left side (not reversible)
Dimensions & Weight	
Overall dimensions (HxWxD) (in)	33 1/4" x 23 1/2" x 25"
Net weight (lbs)	160
Minimum stack height (in)	67 3/4"
ADA compliance	Meets ADA height and access requirements when installed on pedestal. Meets ADA operable parts requirements for controls and detergent dispenser.

*Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit. Matching Dryer is supplied with a power adapter to fit into a standard 4-prong 30A Dryer receptacle (NEMA 14-30R) and power both Bosch Washer and Dryer.

1–800–944–2904 | bosch-home.com/us

24" Compact Dryers

300 Series (Condensing)
WTG86403UC

• Washer Plugs into Dryer
  Adapter for Easy Installation
• Intelligent Sensors Prevent
  Over Drying
• Anti-vibration Circular Side
  Walls Reduce Vibration
• Quick 40 Minute Program
• ENERGY STAR® Certified
• Low Noise 67 dBA

500 Series (Heat Pump)
WTW87NH1UC

Home Connect

+Home Connect™ Controls
  Dryer Remotely
+Recognized as ENERGY STAR®
  Most Efficient of 2020
+America's Only Self-cleaning
  Condenser™
+Reversible Door
+Stainless Steel Drum
+Lower Noise 65 dBA

+Indicates a step-up feature

	300 Series	500 Series
	White – WTG86403UC	White – WTW87NH1UC
General Properties		
Dryer type	Condensing	Heat pump
Drum material	Galvalume	Stainless steel
Interior light	No	No
Ventless drying (no ducting)	Yes	Yes
Stackable	Yes with Stacking Kit Accessory	Yes with Stacking Kit Accessory
Silence level (dBA)	67	65
Programs (No.), [Special]	(15), [Jeans, Heavy Duty]	(14), [Sanitize, Outdoor/Sport]
Options (No.), [Special]	(6), [Dry Level, Finished In]	(8), [Remote Start, Dryness Level]
Energy consumption (kWh / yr)	315	123
ENERGY STAR® certified	No	Most Efficient of 2020
Capacity		
Capacity (cu. ft.)	4.0	4.0
Design Elements		
Door ring	White	Silver
Control type	Touch	Premium LED touch
Dial	White	Silver
Bosch logo on door glass	No	Yes
Technical Details		
Energy source	Electric	Electric
Watts (W)	2,520	900
Circuit breaker (A)	15*	15*
Volts (V)	208/220-240	208/220-240
Current (A)	10.5	3.5
Frequency (Hz)	60	60
Plug type	240V; NEMA 6-15 (3 prong)	240V; NEMA 6-15 (3 prong)
Included power cord length (in)	63" (full length)	63" (full length)
Drain hose length (in)	78" (full length)	78" (full length)
Door hinge	Right side (not reversible)	Right side (reversible)
Dimensions & Weight		
Overall dimensions (HxWxD) (in)	33 $1/4$" x 23 $1/2$" x 25"	33 $1/4$" x 23 $1/2$" x 25"
Net weight (lbs)	99	125
Minimum stack height (in)	67 $3/4$"	67 $3/4$"
ADA compliance	Meets ADA height and access requirements *when installed on pedestal.* Meets ADA operable parts requirements for controls and lint filter.	

*Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit. Matching Dryer is supplied with a power adapter to fit into a standard 4-prong 30A Dryer receptacle (NEMA 14-30R) and power both Bosch Washer and Dryer.

See page 167 for Accessories

24" Compact Dryers

800 Series (Condensing)
WTG865H4UC

Home Connect

+Premium LED Controls with
  Enhanced Text and Icons
+Illuminated Selection Jog Dial
+Interior LED Drum Light
+SuperQuick 15 Minute Program
+ENERGY STAR® Certified
+Lower Noise 63 dBA

+Indicates a step-up feature

|	800 Series
	White – WTG865H4UC
General Properties	
Dryer type	Condensing
Drum material	Stainless steel
Interior light	Yes (LED)
Ventless drying (no ducting)	Yes
Stackable	Yes with Stacking Kit Accessory
Silence level (dBA)	63
Programs (No.), [Special]	(14), [SuperQuick 15, Anti Shrink]
Options (No.), [Special]	(8), [Remote Start, Dryness Level]
Energy consumption (kWh / yr)	315
ENERGY STAR® certified	Yes
Capacity	
Capacity (cu. ft.)	4.0
Design Elements	
Door ring	Chrome
Control type	Premium LED touch
Dial	Chrome illuminated jog dial
Bosch logo on door glass	Yes
Technical Details	
Energy source	Electric
Watts (W)	2,520
Circuit breaker (A)	15*
Volts (V)	208/220-240
Current (A)	10.5
Frequency (Hz)	60
Plug type	240V; NEMA 6-15 (3 prong)
Included power cord length (in)	63" (full length)
Drain hose length (in)	78" (full length)
Door hinge	Right side (reversible)
Dimensions & Weight	
Overall dimensions (HxWxD) (in)	33 $1/4$" x 23 $1/2$" x 25"
Net weight (lbs)	99
Minimum stack height (in)	67 $3/4$"
ADA compliance	Meets ADA height and access requirements *when installed on pedestal.* Meets ADA operable parts requirements for controls and lint filter.

*Stated circuit breaker size is if the appliance is plugged into an individual 240/208V, 15A minimum branch circuit. Matching Dryer is supplied with a power adapter to fit into a standard 4-prong 30A Dryer receptacle (NEMA 14-30R) and power both Bosch Washer and Dryer.

See page 167 for Accessories

24" Compact Washers

300 Series Dimensions and Installation

23½"
12½"
165°
41½"
24¼"
23¾"
33¼"
⅝" (A)
9⅝"

A: ⅝" nominal; ½" minimum; 1" maximum

300 Series, 500 Series and 800 Series

2" 3¼" 4¼"
3"
(A) (C)
(B) 3¼"
2⅜"

A: Drain exit
B: Power cord exit
C: Supply hoses (Hot and Cold)

500 Series and 800 Series Dimensions and Installation

23½"
12½"
180°
42½"
25"
23¾"
33¼"
⅝" (A)
8¼"

A: ⅝" nominal; ½" minimum; 1" maximum

300 Series, 500 Series and 800 Series

Guidance for location of Dryer receptacle and Water taps to minimize depth allowance (Not to Scale)

5"
13"
(A)
(C)
7"±½"
2"±½"
67¾" (D)
2"
5"
(E)
11"
46"±½"
49¾"
26¼"
(B)
7"

A: Dryer
B: Washer
C: Axis lines, in shaded areas, indicate Center Line of home's Dryer receptacle for minimal depth allowance if located entirely behind appliances.
D: Minimum Stack Height (with Stacking Kit)
E: Hatched area - indicates location for home's Hot and Cold water taps/outlets for minimal depth if located entirely behind appliances.

Installer / Customer is responsible for fit, function, maintenance and safety of utility installation.

measurements in inches

300 Series, 500 Series and 800 Series

HL HR
40" 57"
(A)
(B)
(C)
≤ 39"
19" 40"

Washer Model	Supply Hose length	
	HL	HR
WAT28400UC	37"	21"
WAW285HxUC	43"	28"

⏚ Electrical Receptacle
A: Power Cord
B: Supply Hoses
C: Drain Hose

24" Compact Dryers

300 Series, 500 Series and 800 Series Dimensions and installation

23½"
15¼"
180°
42⅞"
25"
23¾"
5/16"
33¼"
⅝" (A)
8½"

A: ⅝" nominal; ½" minimum; 1" maximum

300 Series, 500 Series and 800 Series

Reach of Power cords + Adapter (Not to Scale)

(C) (A)
48" 28"
(B)

A: Dryer
B: Washer
C: Power Adapter
All references to NEMA 14-30R Dryer receptacles in this document have the orientation with the ground pin up.

Use of two individual NEMA 6-15R or 6-20R receptacles may be used as alternative means to power Washer and Dryer.

Dimensions reflect use of stacking kits.

300 Series and 800 Series

1½"
2¾"
(A)
1½"
ø 5/16" (B)
5½"

A: Power cord exit
B: Drain exit

500 Series

1½"
2¾"
(A)
1½"
ø ½" (B)
6½"

A: Power cord exit
B: Drain exit

300 Series, 500 Series and 800 Series

Guidance for location of Dryer receptacle and Water taps to minimize depth allowance (Not to Scale)

5"
13"
(A)
(C)
7"±½"
2"±½"
67¾" (D)
2"
5"
(E)
11"
46"±½"
49¾"
26¼"
(B)
7"

A: Dryer
B: Washer
C: Axis lines, in shaded areas, indicate Center Line of home's Dryer receptacle for minimal depth allowance if located entirely behind appliances.
D: Minimum Stack Height (with Stacking Kit)
E: Hatched area - indicates location for home's Hot and Cold water taps/outlets for minimal depth if located entirely behind appliances.

Installer / Customer is responsible for fit, function, maintenance and safety of utility installation.

measurements in inches

Optional Accessories – Washers

P/N 645787
(500 & 800 Series)
Short Stainless Steel Hose
(If Needed for Plumbing Box Clearance with AQS Hose)

WTZPA20UC
Power Adapter
(Included With Dryer)

WMZPW20W
Washer Pedestal
(Available Feb. 2021)

WTZ11400UC
Stacking Kit With Shelf

WTZ20410UC
Stacking Kit Without Shelf

Included Accessories – Dryers

WTZPA20UC
Power Adapter
(Included With Dryer)

Optional Accessories – Dryers

WTZPW20D
Dryer Pedestal
(Available Feb. 2021)

WTZ11400UC
Stacking Kit With Shelf

WTZ20410UC
Stacking Kit Without Shelf

WMZ20600
Drying Rack

24" Washers and Dryers Installed in Enclosure

Enclosure Dimensions

Closet: Stacked Washer and Condensation Dryer
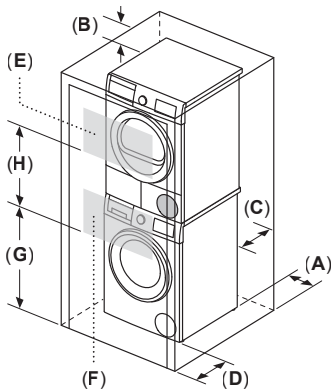

Closet: Stand Alone (shown) or Side by Side
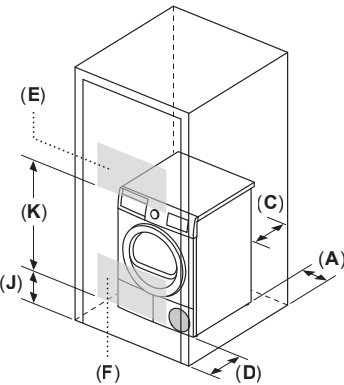
Minimum clearance requirements
(Stacked, Stand Alone or Side by Side):
A: Both sides (left and right) – 5/8"
B: Top – 6¼"
C: Rear – 2½"
D: Front – 2½"

Minimum louvered area and spacing:
E: Top louver area – 63 sq. in.
F: Bottom louver area – 63 sq. in.
G: Lower Height (stacked) – 37"
H: Upper Height (stacked) – 26"
J: Lower Height (stand alone) – 3"
K: Upper Height (stand alone) – 29"

For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow minimal drying results (expect long drying times).

Closet: Stacked Washer with Heat Pump Dryer

Minimum clearance requirements
(Stacked, Stand Alone or Side by Side):
A: Both sides (left and right) – 1/2"
B: Top – 6¼"
C: Rear – 3"
D: Front – ½"

Minimum door undercut (louvered area):
E: Undercut height (Top and Bottom) – 1¼"
Louvered areas of equal total sizes and split between upper and lower portions of door are permitted.
F: Undercut width (Top and Bottom):
– 24" minimum for Stacked and Stand Alone
– 48" minimum for Side by Side

For shortest drying times keep closet door open while dryer is operating. When closet doors are closed, open areas only allow minimal drying results (expect long drying times).

Optional Pedestal

23⅝"
37¾"
23¼"
13⅜"
17¾"
15⅜"
5/8"±3/8"

All 300-500-800 Series Washers & Dryers

Under Counter (Preferred)

Minimum opening dimensions:
A: Depth – 28"
B: Width – 23⅞"
C: Height – 34½"

Front of appliance fully open. No doors or coverings.

All 300-500-800 Series Washers & Condensate Dryers

**Under Counter Enclosed (Less Preferred)**

If the front of the appliance is covered, louvered openings must be installed as shown and front/rear clearances adhered to according to closet installations.

Minimum louvered area and spacing:
E: Top louver area – 63 sq. in.
F: Bottom louver area – 63 sq. in.
G: Lower Height – 3"
H: Upper Height – 14"

For shortest drying times keep cabinet door open while dryer is operating. When cabinet door is closed, open areas only allow minimal drying results (expect long drying times).

500 Series Heat Pump Dryer

Under Counter Enclosed (Less Preferred)

≥ 24"
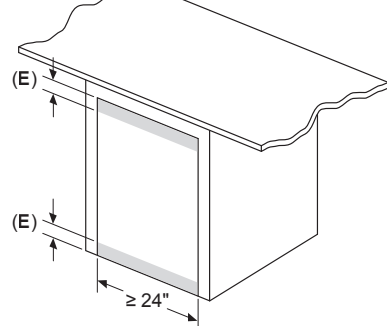
Minimum door undercuts:
E: Undercut height (Top and Bottom) – 1¼"
Louvered areas of equal total sizes and split between upper and lower portions of door are permitted.

For shortest drying times keep cabinet door open while dryer is operating. When cabinet door is closed, open areas only allow minimal drying results (expect long drying times).

measurements in inches

Experience Bosch.

Bosch appliances are built with precision engineering and invented for life. Whether you would like to research our products, get inspired with kitchen design ideas, or have questions on the use and care of your product, simply browse our online resource library at **bosch-home.com/us**.

Connect with us

instagram.com/boschhomeus
facebook.com/boschappliances
youtube.com/boschhome
twitter.com/boschhomeus
pinterest.com/boschhomeus

Visit the above sites to get inspired and share photos of your new kitchen.

Come visit us at any of our beautiful showroom locations:

> BSH Experience & Design Center
17911 Von Karman, Suite 100
Irvine, CA 92614
949-224-4700

> BSH Experience & Design Center
222 Merchandise Mart, Suite 108
Chicago, IL 60654
312-832-3200

> A&D Building New York City
BSH Experience & Design Center
150 East 58th Street, Suite 700
New York, NY 10155
888-455-8892 or 212-588-0950

Get complete details at
bosch-home.com/us/experience-bosch/showrooms

Warranty Overview

> Lifetime Stainless Steel Rust-through Warranty for Dishwashers and Refrigerators
> One-year Limited Warranty on all Bosch Appliances

Service you can trust 100%.

Please don't hesitate to contact us if you have questions on our product line, need advice about use and care, or would like to purchase accessories. We are ready to assist you.

Bosch Customer Support

Contact us for cleaning & care tips, usage instructions, and more. We're here to help.

> Appliance Advice
> Troubleshooting Assistance
> Service Visit/Repair Scheduling
> Home Connect™ Set-up
> Cleaners, Accessories & Parts

1-800-944-2904
(24/7 Call Center Access with U.S. & Canadian call centers)

www.bosch-home.com/us/owner-support

Website

> How-to Videos
> Frequently Asked Questions
> Filters, Accessories, and Parts
> Owner Manuals
> Product Registration
> Find a Dealer
> Find a Bosch Authorized Servicer

Bosch Home Appliances US:
www.bosch-home.com/us

Bosch Home Appliances Canada:
www.bosch-home.ca

Bosch Information Portal
for Home Depot Associates

www.askboschhomedepot.com

> Chat with a knowledgeable representative
> Get answers to all of your Bosch appliance questions
> Obtain product information and installation details
> Find design inspiration and selling tools
> Stay updated with training resources

Bosch Help Line for
Home Depot Associates

Bosch Home Appliances Help Line
> **1-800-554-9560**
> Fax: 949–437–7012
> Email: IRV-HomeDepot@bshg.com

Available Monday – Friday, 5 a.m. – 5 p.m. PST
Saturdays, 6 a.m. – 3 p.m. PST
Please have your purchase order number ready before you call.

> Check product availability
> Check order status
> Check shipment information
> Proof of delivery
> Packing slips
> Product returns – return authorization
  or concealed damage within the first 48 hours
> Defective units return authorization within the
  first 48 hours

Warranty

Cooktops & Rangetops

Limited warranty, entire appliance, parts and labor (1 year)

Ovens

Limited warranty, entire appliance, parts and labor (1 year)

Microwaves

Limited warranty, entire appliance, parts and labor (1 year)

Built-in Coffee Machine

Limited warranty, entire appliance, parts and labor (1 year)

Ranges

Limited warranty, entire appliance, parts and labor (1 year)

Ventilation

Limited warranty, entire appliance, parts and labor (1 year)

Dishwashers

Limited warranty, entire appliance, parts and labor (1 year)

Limited warranty for microprocessor or printed circuit board; parts only (2nd to 5th year)

Limited warranty for racks (does not include rack components); parts only (2nd to 5th year)

Limited warranty for rust-through on inner tub liner; parts only (lifetime)

Refrigerators

Limited warranty, entire appliance, parts and labor (1 year)

Limited warranty for non-electronic components; parts only (1st to 2nd year)

Limited warranty for electronic components; parts only (2nd to 5th year)

Limited warranty for rust-through on stainless steel; parts only (lifetime)

24" Compact Laundry (Washers & Dryers)

Limited warranty, entire appliance, parts and labor (1 year)

Extended limited warranty from date of purchase (2 years)

Bosch will repair or replace, free of charge, any printed circuit boards, drive motor, or component part of the drive motor that proves defective under conditions of normal home use during the first two years from the date of purchase, labor charges excluded.

Important Note: Please refer to installation instructions prior to making cutout. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details. For more information on our entire line of products, go to www.bosch-home.com/us (Canada residents go to www.bosch-home.ca) or call 1–800–944–2904.

Warranty Note: Bosch warrants that the Product is free from defects in materials and workmanship for a period of three hundred and sixty-five (365) days from the date of purchase. The foregoing timeline begins to run upon the date of purchase, and shall not be stalled, tolled, extended, or suspended, for any reason whatsoever. This Product is also warranted to be free from cosmetic defects in material and workmanship (such as scratches of stainless steel, paint/porcelain blemishes, chips, dents, or other damage to the finish of the Product, for a period of thirty (30) days from the date of purchase or closing date for new construction. This cosmetic warranty excludes slight color variations due to inherent differences in painted and porcelain parts, as well as differences caused by kitchen lighting, product location, or other similar factors. This cosmetic warranty specifically excludes any display, floor, "As Is", or "B" stock appliances.

1–800–944–2904 | bosch-home.com/us

Bosch Home Appliances
1901 Main Street, Suite 600
Irvine, CA 92614
1–800–944–2904

www.bosch-home.com/us (U.S.)
www.bosch-home.ca (Canada)

BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details. Applicable product warranty can be found in accompanying product literature or you may contact your account manager for further details.